

# Digitus® USB-C extension cable, USB-C - USB-C

AK-300210-015-S

EAN 4016032455301



## USB Type-C extension cable, Type C M/F, 1.5m, 3A, 480MB, Version 2.0, bl

This USB Type-C extension cable allows you to extend the usage distance of the Type-C interface on your notebook, tablet, smartphone or docking station.

**Extend your original Type-C port on your MacBook or other device to a suitable position**

- Supports power supply up to 20V/3A, 60W


### Attributes

- AWG: 22
- Color cable: black
- Connector 1: USB C, plug
- Connector 2: USB-C jack
- Connector surface: nickel-plated
- USB compliance: USB 2.0
- Length: 1.5 m
- Shielding: Double shielding
- USB-C Products: yes

## Logistics

|                              | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm³       |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------|
| Packaging Unit Carton        | 300          | 14.80       | 45.00      | 34.00      | 28.00       | 42,840.00 |
| Packaging Unit Inside        | 10           | 0.49        | 25.00      | 4.00       | 22.00       | 2,200.00  |
| Packaging Unit Single        | 1            | 0.05        | 12.00      | 1.00       | 16.00       | 192.00    |
| Net single without Packaging | 1            | 0.03        | 16.00      | 12.00      | 0.60        | 0.00      |

## More images:

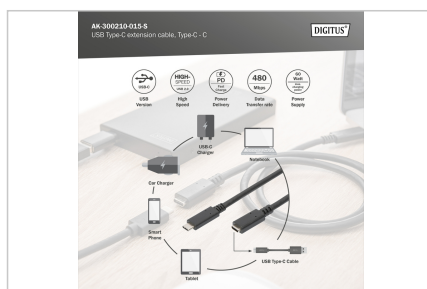



## Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

## EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schöffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)