


760GM-P34 (FX) (MS-7641v4.0) Micro-ATX Mainboard

Support for AMD FX/ Phenom™ II/ Athlon™ II/ Sempron™ processors in an AM3+ socket

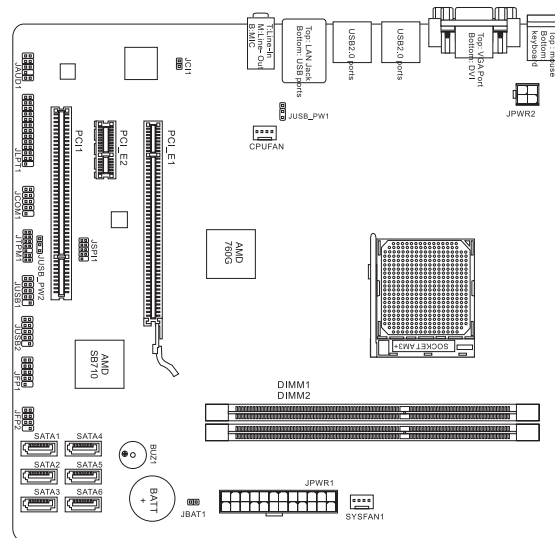

Mainboard Specification

Processor Support Support for AMD FX/ Phenom™ II/ Athlon™ II/ Sempron™ processors in an AM3+ socket	Connectors Back panel 1 PS/2 keyboard port 1 PS/2 mouse port 1 VGA port 1 DVI port 6 USB 2.0 Ports 1 LAN jack 3 flexible audio jacks On-Board Connectors 2 USB 2.0 connectors 1 Front Panel Audio connector 1 Serial connector 1 TPM Module pinheader 1 Chassis Intrusion connector 1 Parallel port connector 1 CPU Fan connector 1 System Fan connector
HyperTransport Supports Hyper Transport (HT) 3.0 Technology	Slots 1 PCI Express x16 slot 1 PCI Express x1 slot 1 PCI slot - Support 3.3V/ 5V PCI bus Interface
Chipset - North Bridge: AMD® 760G chipset - South Bridge: AMD® SB710 chipset	Form Factor Micro-ATX (243.84mm X 228.00mm)
Memory Support 2 DIMMs support for DDR3-1066/1333/1600/1866(OC) MHz up to 16GB max - Supports Dual-Channel mode	Feature on Focus - All Solid Cap design - Active Phase Switch feature to save power dynamically - Heat sink design - M-Flash included - Unlock CPU Core
LAN Supports Gb LAN 10/100/1000 Fast Ethernet by Realtek® RTL8111E	Mounting 6 mounting holes
Audio - Chip integrated by Realtek® ALC887 - Flexible 8-channel audio with jack sensing - Compliant with Azalia 1.0 Spec	
SATA 6 SATA 3Gb/s ports by AMD® SB710	
RAID Supports Raid 0/1/ 10/ JBOD mode	

These specification is subject to change without prior notice.