


Navilock NL-290BG Multi GNSS BEIDOU GALILEO GPS SMA Antenna 3 m

Description

You can use this active antenna for your GNSS equipment to receive GPS and BeiDou (COMPASS) signals simultaneously.

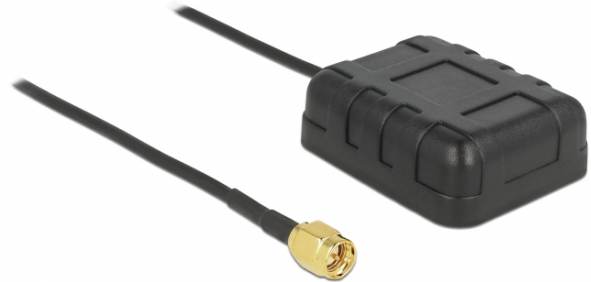

3 m

Specification

- External active additional antenna for GNSS receivers
- Connector: SMA plug
- Polarisation: RHCP
- Frequency range:
 - GPS: 1575.42 MHz +/- 3 MHz
 - BeiDou: 1561.098 MHz +/- 5 MHz
- Patch antenna: 3 dBic
- Patchantenne: 25 x 25 x 6 mm
- VSWR: • Axial Ratio: 3 dB
- LNA
- Gain: 28 dB
- VSWR: • Impedance: 50 Ohm
- Operating voltage: 3.0 ~ 5.0 V
- Current consumption: 10 ~ 20 mA
- Operating temperature: -40 °C ~ 85 °C
- Protection class: IP65
- Weight: 0.150 kg
- Cable type: RG174
- Cable diameter: ca. 2.5 mm
- Cable colour: black
- Cable length incl. connector: 3 m
- Dimensions (LxWxH): ca. 5.00 x 4.25 x 1.65 cm
- Magnetic housing bottom
- Material: ABS

System requirements

- GNSS device with SMA jack

Package content

- GNSS antenna

Item no. 60554

EAN: 4043619605545

Country of origin: China

Package: Zip poly bag

Images

