

# DIGITUS® Datatransfer extension cable, D-Sub25/M - D-Sub25/F

AK-610201-020-E  
EAN 4016032301196



**Datatransfer extension cable, D-Sub25 M/F, 2.0m, serial/parallel, molded, be**

Datatransfer extension cable, D-Sub25,M/F, 2.0m, serial/parallel, molded, be

**Enables a save and stable connection**

## Attributes



- Assignment: 1:1
- Assortment: Serial and Parallel Adapters
- AWG: 28

- Cable type: 25-wire
- Color cable: beige
- Color connector: beige
- Connector 1: DSUB, 25-pin, plug
- Connector 2: DSUB, 25-pin, jack
- Connector surface: nickel-plated
- Hoods: molded
- Packaging: Polybag
- Wire material: CU
- Length: 2 m
- Shielding: single shielding

## Logistics

|                                 | Number<br>(pcs) | Weight<br>(kg) | Depth<br>(cm) | Width<br>(cm) | Height<br>(cm) | cm <sup>3</sup> |
|---------------------------------|-----------------|----------------|---------------|---------------|----------------|-----------------|
| Packaging Unit Carton           | 50              | 11.38          | 32.00         | 45.00         | 25.00          | 36,000.00       |
| Packaging Unit Inside           | 10              | 2.28           | 36.00         | 36.00         | 10.00          | 12,960.00       |
| Packaging Unit Single           | 1               | 0.23           | 0.50          | 17.00         | 25.00          | 212.50          |
| Net single without<br>Packaging | 1               | 0.22           | 1.50          | 14.00         | 15.50          | 0.00            |

## More images:

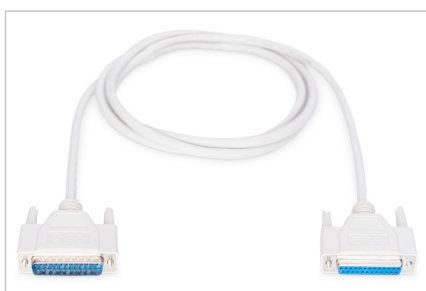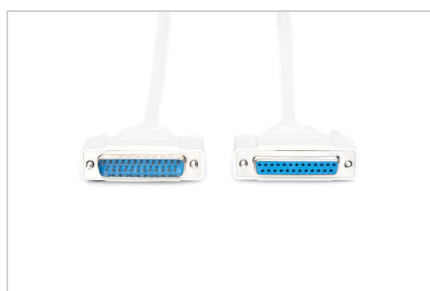

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)