



12Gb/s PCIe Gen3 Product Family High-Port SAS/SATA RAID Adapters 81605ZQ, 8885Q, 81605Z, 8885, 8805, 8405

MAXIMUM PERFORMANCE

Data center, IT, and general consumer server environments have a broad range of requirements — from basic connectivity to extreme data storage capacities. The effectiveness at which their data is accessed and protected is crucial to their ultimate success. PMC® Adaptec® 12Gb/s PCIe Gen3 Series 8 RAID adapters, coupled with 12Gb/s SSDs, provide maximum read/write bandwidth and IOPS for the most performance-hungry transactional and database applications.

SERIES 8Q WITH ADAPTEC MAXCACHE 3.0


Advancing the performance capabilities of SSD caching to a broader set of application workloads, the Series 8Q with maxCache 3.0 supports read and write back caching. By caching writes to a redundant SSD cache pool (RAID1, RAID1E or RAID5, maxCache 3.0 leverages the performance and latency capabilities of SSD technology for both read and write workloads. The read caching function is also improved with maxCache 3.0, with additional optimizations to the learned-path algorithm. Adaptec maxCache 3.0 SSD Caching software is the only caching solution that supports up to 2 TB of SSD cache.

INTEGRATED CACHE PROTECTION

The Series 8 family continues Adaptec's battery-free portfolio. Series 8 adapters can be combined with the AFM-700 flash-based cache protection module (sold separately) to enable instant cache protection. New with Series 8, the Adaptec 81605Z and 81605ZQ models have flash backup embedded on the board, eliminating the need for a daughterboard and further enabling Adaptec customers to do more with less.

ADVANCED DATA PROTECTION AND EASE OF USE

Advanced data protection and ease of use have not been forgotten in Series 8. Adaptec RAID Code (ARC) delivers maximum reliability with an industry-leading feature set, including all of the RAID levels the industry has come to expect, plus unique features like Flexible Configuration modes for the adapter, Hybrid RAID, and Optimized Disk Utilization (ODU) where no available space is wasted. Adaptec's maxView provides an HTML5 web interface, which can be used in standard desktops and mobile browsers, for all storage configuration and management needs.

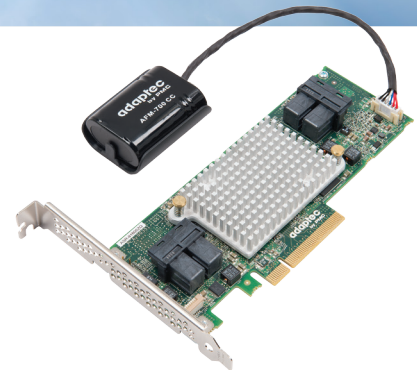


SERIES 8 FAMILY FEATURES

- PMC's 12Gb/s RAID-on-Chip (ROC), x8 PCIe Gen3 interface with 12Gb/s SAS ports to enable a new generation of performance
- Up to 16 native SAS/SATA ports in a LP/MD2 design
- 12Gb/s throughput with mini SAS HD connectors
- >700K IOPS; 6.6GB/s sequential reads, 6.2GB/s sequential writes

maxCache

maxView

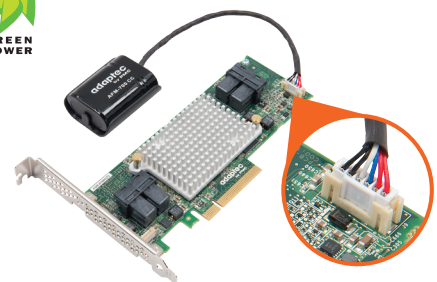

Benefits	Ideal for 12Gb/s performance-hungry server and workstation platforms, without compromising proven Adaptec reliability		
Key Differentiators	- maxCache 3.0 caching software (Series 8Q only) - Third generation ZMCP; AFM-700 (Optional, included on 8Z/8Q SKUs)	- LP/MD2 form factor for up to 16 native SAS/SATA ports - Integrated cache protection (81605Z and 81605ZQ)	6Gb/s compatibility with HDD or SSD SAS/SATA devices
Customer Needs	High I/O transaction and high bandwidth processing; solutions that reduce energy consumption and maintenance costs.		
Key Software Features	- maxCache 3.0 caching software (Series 8Q only) - Flexible Configuration: HBA Mode & Auto Volume Mode for automatic deployment - Optimized Disk Utilization (multiple arrays per disk) - Supports up to 256 SAS or SATA devices using SAS expanders - Support for native 4K sector SAS and SATA devices in addition to 512 byte sector devices - Hybrid RAID 1 & 10 - Quick initialization	- Online Capacity Expansion - Copyback Hot Spare - Dynamic caching algorithm - Native Command Queuing (NCQ) - Background initialization - Hot-plug drive support - RAID Level Migration - Hot spares- global, dedicated, and pooled - Automatic/manual rebuild of hot spares - SES and SAF-TE enclosure management - Configurable stripe size - S.M.A.R.T. support	- Multiple arrays per disk drive - Dynamic sector repair - Staggered drive spin-up - Bootable array support - Support for Tape Devices, Autoloaders - MSI-X support for all device drivers for all supported Operating Systems - Secure boot support for the uEFI host BIOS - USB image available on start.adaptec.com to boot maxView GUI from any USB device for enhanced GUI-based setup and offline maintenance
Management Utilities	Adaptec maxView Storage Manager - Web based GUI Management Utility - OS Support: Windows, Linux, Solaris, VMware - Remote configuration, monitoring & notification - Remote firmware updates - SMI-S Support - SMTP	ARCCONF - Command Line Interface - SMI-S support for VMware Adaptec BIOS Configuration Utility (CTRL+A) - Legacy configuration utility - Flashable BIOS support	Adaptec uEFI BIOS Configuration Utility - HII based configuration utility - Flashable BIOS support
Operating Systems	Microsoft Windows, Red Hat Linux, SUSE Linux, Fedora, Debian Linux, Ubuntu Linux, Sun Solaris, FreeBSD, VMware ESXi. The latest drivers are available at start.adaptec.com		
Physical Dimensions	MD2- Low Profile 2.535"H x 6.6"L (64mm x 167mm)		
Operating Temperature	0°C to 55°C* (with 200 LFM airflow, without flash); 0°C to 50°C* (with 200 LFM airflow, with flash) Note: This adapter contains a powerful RAID processor which requires adequate airflow to operate reliably. Please install this card only into server or PC chassis with at least 200 LFM airflow. *Temperature measured 1 inch from RAID adapter		
Operating Current	0.1A @ 3.3 VDC; 1.2A @ 12.0 VDC 8405, 8805, 8885, 8885Q; 1.0A @ 3.3 VDC; 1.1A @ 12.0 VDC 81605ZQ, 81605Z		
Regulatory Certification	CE, FCC, UL, C-tick, VCCI, KCC, CNS		
Environmental Compliance	RoHS		
MTBF	775,000 hours at 40° C		
Warranty	3 years		

	SERIES 8 Q		SERIES 8			
ADAPTEC RAID	81605ZQ	8885Q	81605Z	8885	8805	8405
Order Part Number	2281600-R (Single)	2277100-R (Single)	2287101-R (Single)	2277000-R (Single)	2277500-R (Single)	2277600-R (Single)
RAID Levels	0,1,1E,5,6,10, 50, 60	0,1,1E,5,6,10, 50, 60	0,1,1E,5,6,10, 50, 60	0,1,1E,5,6,10, 50, 60	0,1,1E,5,6,10, 50, 60	0,1,1E,5,6,10, 50, 60
Ports	16 Internal	8 Internal/8 External	16 Internal	8 Internal/8 External	8 Internal	4 Internal
Connectors	4 X SFF-8643	2 x SFF-8643 2 x SFF-8644	4 X SFF-8643	2 x SFF-8643 2 x SFF-8644	2 X SFF-8643	1 X SFF-8643
Bus Interface	8-Lane PCIe Gen3	8-Lane PCIe Gen3	8-Lane PCIe Gen3	8-Lane PCIe Gen3	8-Lane PCIe Gen3	8-Lane PCIe Gen3
Processor	PMC 12Gb/s RoC	PMC 12Gb/s RoC	PMC 12Gb/s RoC	PMC 12Gb/s RoC	PMC 12Gb/s RoC	PMC 12Gb/s RoC
Cache	1024MB	1024MB	1024MB	1024MB	1024MB	1024MB
Cache Protection	Flash backup (embedded) AFM-700 (included)	AFM-700 (included)	Flash backup (embedded) AFM-700 (included)	AFM-700 (optional)	AFM-700 (optional)	AFM-700 (optional)



Further Resources and Information: www.adaptec.com



ABOUT PMC-SIERRA

PMC (Nasdaq: PMCS) is the semiconductor and software solutions innovator transforming networks that connect, move and store Big Data. Building on a track record of technology leadership, the company is driving innovation across storage, optical and mobile networks. PMC's highly integrated solutions increase performance and enable next-generation services to accelerate the network transformation.

For more information visit www.pmcs.com or email info@pmcs.com

Corporate Head Office:

PMC-Sierra, Inc.
1380 Bordeaux Drive
Sunnyvale, CA 94089 USA

T: 1.408.239.8000

F: 1.408.492.9192

Operations Head Office:

PMC-Sierra, Ltd.
8555 Baxter Place
Burnaby, BC V5A 4V7 Canada

T: 1.604.415.6000

F: 1.604.415.6200

Copyright © 2015 PMC-Sierra, Inc. All rights reserved.

For a complete list of PMC-Sierra's trademarks, visit www.pmc-sierra.com/legal/. Other product and company names mentioned herein may be the trademarks of their respective owners. PMC-2151932, Issue 2