


# Delock PCI Express Card > 3 x M.2 Slot – Low Profile Form Factor

## Description

This PCI Express card by Delock expands the PC by three M.2 slots. On the card can be connected up to two M.2 SATA modules in format 2280, 2260, 2242, 2230 and one M.2 PCIe module in format 2280, 2260, 2242, 2230. The SATA modules will be connected via SATA cables to the motherboard.

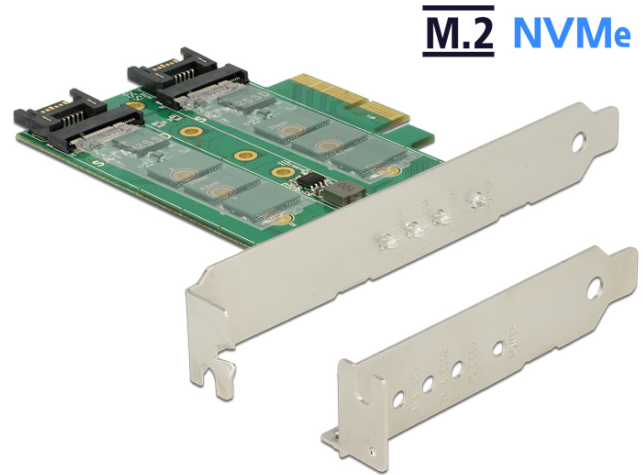

## Special features

- Supports modules with SATA and PCIe interface

## Specification

- Connectors:
  - internal:
    - 2 x 67 pin M.2 key B slot
    - 1 x 67 pin M.2 key M slot
    - 1 x PCI Express x4, V3.0
    - 2 x SATA 7 pin plug
- Interface: SATA + PCIe
- Supports
  - two M.2 modules in format: 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA and
  - one M.2 module in format: 2280, 2260, 2242 and 2230 with key M or key B+M based on PCIe
- Maximum height of the components on the module: 1.35 mm application of double-sided assembled modules supported
- Supports NVM Express (NVMe)
- 4 x LED indicator
- Power supply via PCI Express

## System requirements

- Windows 7/7-64/8.1/8.1-64/10/10-64, Linux Kernel 3.3
- PC with one free PCI Express x4 / x8 / x16 / x32 slot
- One free SATA 7 pin interface for each connected M.2 module based on SATA

## Package content

- PCI Express card
- Low profile bracket
- 3 x fixing screw
- User manual

Item no. 89518



EAN: 4043619895182

Country of origin: Taiwan, Republic of China

Package: Retail Box



Images



General	
Function:	NVM Express (NVMe)
Supported operating system:	Linux Kernel 3.3 Windows 7 32-bit Windows 7 64-bit Windows 8.1 32-bit Windows 8.1 64-bit Windows 10 32-bit Windows 10 64-bit
Slot:	SATA PCIe
Supported module:	M.2 modules in format 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA
Maximum height of the components on the module:	1.35 mm application of double-sided assembled modules supported
Interface	
Internal:	2 x 67 pin M.2 key B slot 1 x 67 pin M.2 key M slot 1 x PCI Express x4, V3.0 2 x SATA 22 pin plug
Physical characteristics	
Slot bracket:	low profile standard