
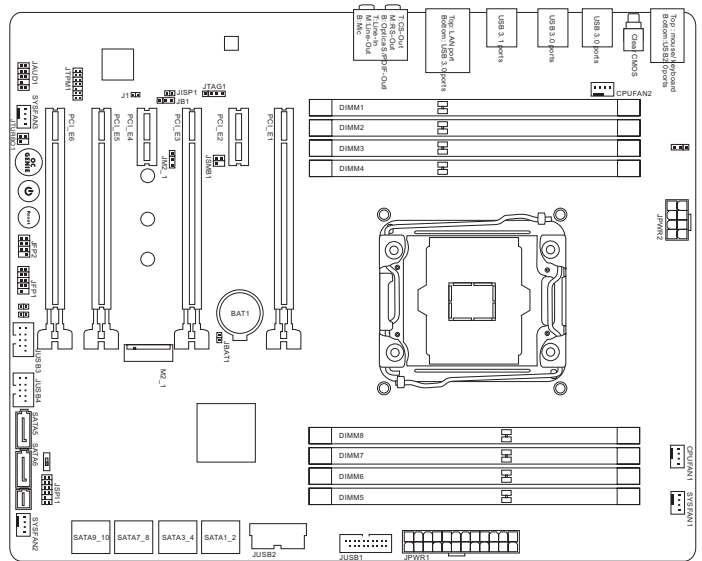


X99A SLI PLUS

(MS-7885v1.1) ATX Motherboard

Supports New Intel® Core™ i7 Processors
Extreme Edition for LGA 2011-3 Socket

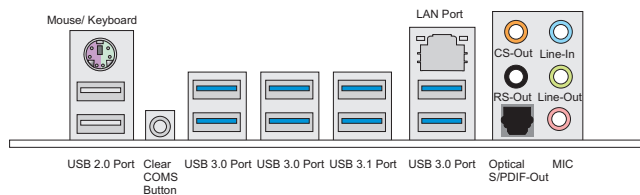

Motherboard Specification

Processor Support - Supports New Intel® Core™ i7 Processors Extreme Edition for LGA 2011-3 Socket Base Clock 100/125/167 MHz Chipset - Intel® X99 Express Chipset Memory Support - Support 8 DIMMs, Quad Channel DDR4 2133/2200(OC)/2400(OC)/2600(OC)/2666(OC)/2750(OC)/3000(OC)/3110(OC)/3333(OC) up to 128 GB max LAN - Supports Gigabit LAN 10/100/1000 Fast Ethernet by Intel® I218 Audio - Realtek® ALC892 Codec 7.1-Channel High Definition Audio/ Supports S/PDIF output SATA 10 SATA 6Gb/s ports (2 ports from SATA Express port) - Supports RAID 0, 1, 5, 10 – Only Available on ports SATA1 to SATA6 M.2 Slot - Support M.2 Gen2x2/ Gen3x4 by Intel® X99/ CPU (switch from SATA Express/PCIe6) USB 3.0 6 USB 3.0 ports by Intel® X99 (2 rear / 4 front) 4 USB 3.0 ports by VIA805 (4 rear) USB 3.1 2 USB 3.1 ports by ASM1142 (2 rear)	Connectors - Back panel 1 PS/2 mouse/ keyboard port 2 USB 2.0 ports 6 USB 3.0 ports 2 USB 3.1 ports 1 Clear CMOS button 1 Optical S/PDIF OUT connector 1 LAN port 5 flexible audio port - On-Board 2 USB 2.0 connectors / 2 USB 3.0 connectors 1 TPM module connector / 1 Front panel audio connector 1 Chassis Intrusion connector / 1 Clear CMOS jumper 1 Power button / 1 Reset button / 1 OC Genie button 1 Multi-BIOS switch Slots 4 PCIe x16 slots 2 PCIe x1 slots Form Factor - ATX (304.8 x 243.8 mm) Feature on Focus - Military Class 4 - OC Genie 4 - Click BIOS 4 - Easy Button - Clear CMOS Button - Super Charger - Smart Utilities - Command Center - Guard Pro - ECO Center - SLI - Crossfire Mounting 9 mounting holes
---	--

These specification is subject to change without prior notice.