


ALTHEA17B 3-Port 67W GaN USB PD Charger with USB-C Charging Cable, USB-C x 2, USB-A x 1, QC 3.0, PPS, PD 3.0

Product Images

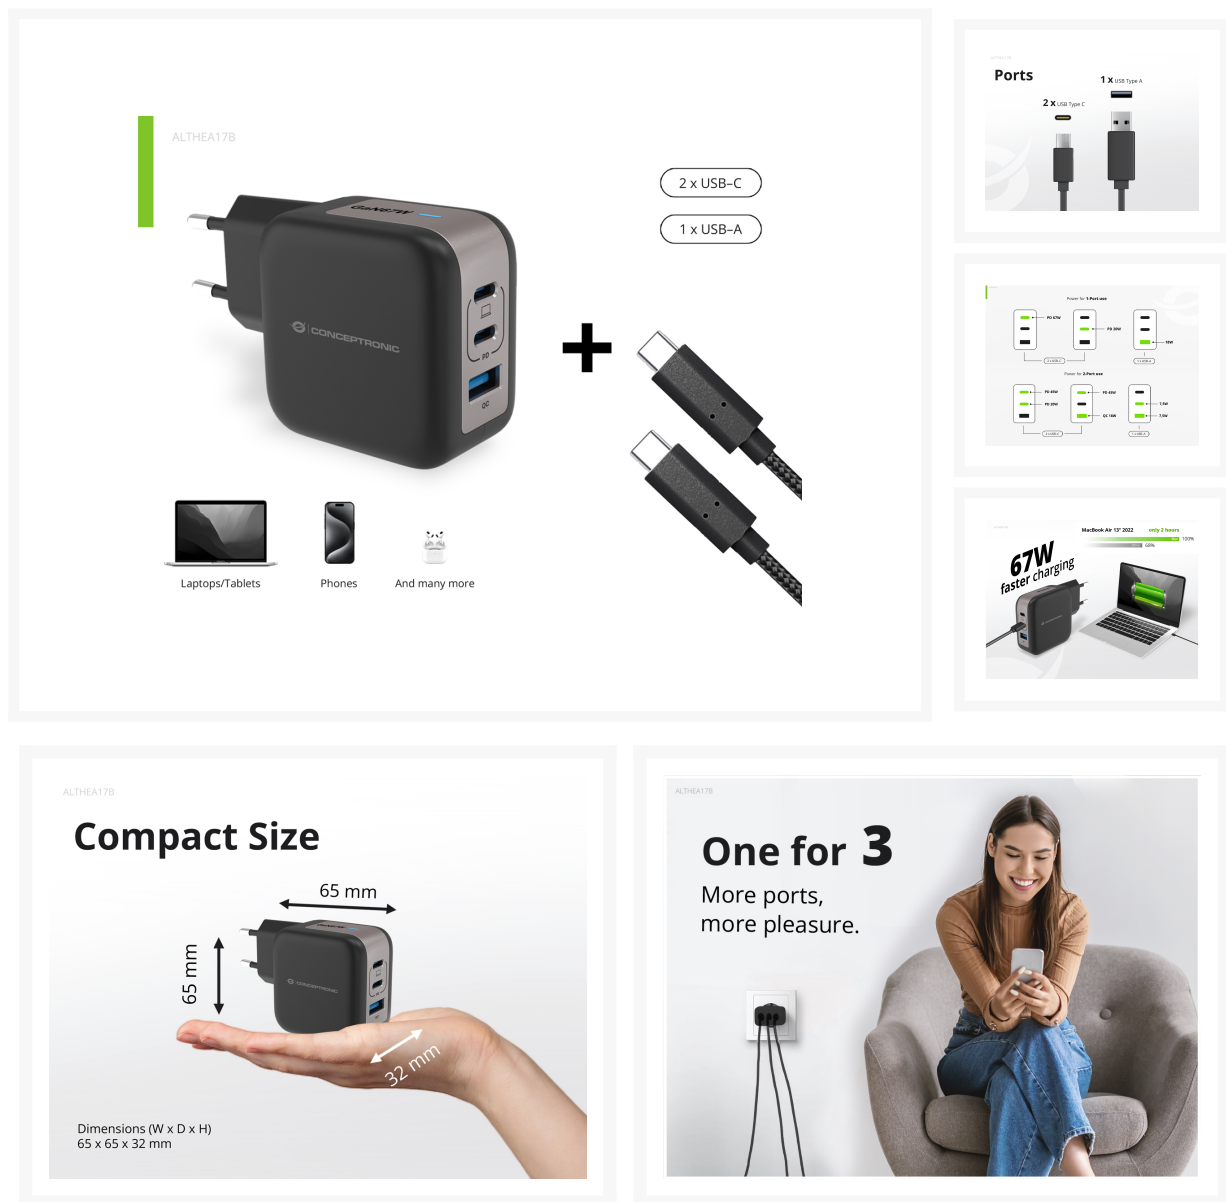

ALTHEA17B


Premium GaN-Technologie Your benefits:

- > GaN chargers are smaller
- > less heat during power transfer
- > more energy efficient



Power for 3-Port use

Conceptronic ALTHEA17B Charger charging instructions

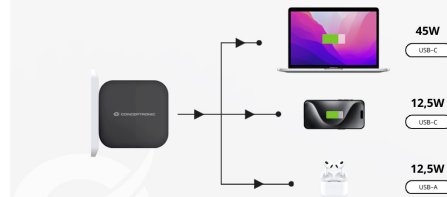

ALTHEA17B

Universal compability

Laptop



MacBook Pro



MacBook Air



Dell XPS 13

Tablet



iPad Pro / Air / Mini



Galaxy Tab S8 / S7 / A8

Smartphone



iPhone



HUAWEI Mate 60 Series



Galaxy



Google Pixel

And many more



AirPods / DJI / Canon / Gaming



Short Description

- **High-Power GaN Technology:** This charger utilizes advanced Gallium Nitride (GaN) technology, providing up to 67W of total power for faster and more efficient charging.
- **Versatile Port Selection:** Equipped with 3 ports including 2 USB-C ports (with PD 3.0) and 1 USB-A ports (with QC 3.0), allowing simultaneous charging for multiple devices with varying power requirements.
- **Wide Compatibility:** Supports a range of output options from 3.3V to 20.0V across its ports, ensuring compatibility with devices from smartphones to laptops.
- **Enhanced Safety Features:** Built-in protections against overload, short circuiting, and overheating, ensuring the safety of both the charger and connected devices.

- **Efficiency and Fast Charging Technology:** Incorporates USB Power Delivery (PD) 3.0 and Quick Charge (QC) 3.0 technologies for rapid charging, along with Programmable Power Supply (PPS) compliance to maximize charging efficiency and minimize heat generation.
- **Included USB Cable:** Comes with a 1.5m 3.0A USB-C to USB-C cable for convenience and versatility.

Description

This charger leverages advanced Gallium Nitride (GaN) technology to deliver up to 67W of total power, ensuring faster and more efficient charging for your devices. It features a versatile port selection with 3 ports: 2 USB-C ports equipped with Power Delivery (PD) 3.0 and 1 USB-A port with Quick Charge (QC) 3.0. This setup allows for simultaneous charging of multiple devices with varying power requirements. The charger supports a broad range of output options from 3.3V to 20.0V, making it compatible with a wide array of devices, from smartphones to laptops. Enhanced safety is provided through built-in protections against overload, short-circuiting, and overheating, safeguarding both the charger and connected devices. Additionally, it incorporates USB Power Delivery (PD) 3.0 and Quick Charge (QC) 3.0 technologies for rapid charging, along with Programmable Power Supply (PPS) compliance to optimize charging efficiency and reduce heat generation. For added convenience, the charger comes with a 1.5m 3.0A USB-C to USB-C cable.

Additional Information

Cables included.	USB Type-C
Power Plug Type.	EU
USB Power Delivery revision	3.0
Number of outputs.	3
USB Type-A ports quantity.	1
Fast charging technology.	Quick Charge 3.0, Power Delivery 3.0, Programmable Power Supply (PPS)
USB Type-C ports quantity.	2
Programmable power supply (PPS) (YES/NO).	Yes
Housing Material.	Polycarbonate (PC)
Number of simultaneously connected devices (max).	3
Port 1 Power Output.	USB-C1 output: DC 5.0V/3.0A, 9.0V/3.0A, 12.0V/3.0A, 15.0V/3.0A, 20.0V/3.35A (PD); 3.3-11.0V/4.05A (PPS)
Port 2 Power Output.	USB-C2 output: DC 5.0V/3.0A, 9.0V/2.22A, 12.0V/1.67A (PD); 3.3-11.0V/1.8A (PPS)
Port 3 Power Output.	USB-A output: DC 5.0V/3.0A, 9.0V/2.0A, 12.0V/1.5A (QC 3.0)
Cable length.	150 centimeter
Harmonized System (HS) code.	850440
Maximum AC Input.	240 volt
Minimum AC Input.	100 volt
Input current.	1.5 ampere
Maximum power.	67 watt
Power Protection Features.	Over current, Over power, Short circuit
Sustainability Compliance.	No
Operating temperature (T-T) Max.	35 celsius

Operating temperature (T-T) Min.	0 celsius
Storage relative humidity (H-H) Max.	90%
Storage relative humidity (H-H) Min.	10%
Operating relative humidity (H-H) Max.	80%
Operating relative humidity (H-H) Min.	20%
Storage temperature (T-T) Max.	80 celsius
Storage temperature (T-T) Min.	-20 celsius
Package Depth.	36 millimeter
Package Height.	110 millimeter
Package Width.	125 millimeter
Product Gross Weight.	29 gram
Approval and Compliance.	CE, ERP, RoHS
Package Content.	Quick installation guide, USB cable (C-C)
Color.	Black
Model Number.	ALTHEA17B
EAN.	4015867236512
Product Height.	32 millimeter
Product Width.	54 millimeter
Product Depth.	54 millimeter
Product Net Weight.	128 gram

