


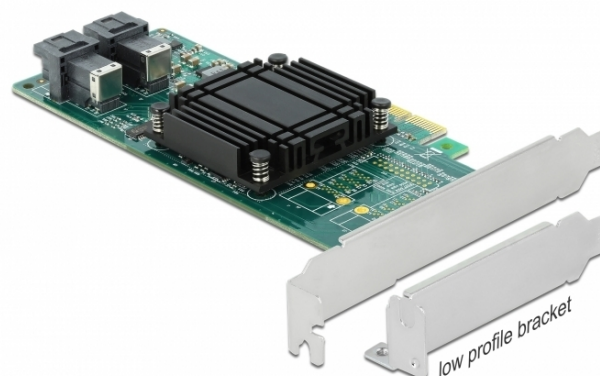

Delock PCI Express x8 Card to 2 x internal SFF-8643 NVMe - Low Profile Form Factor

Description

This PCI Express card by Delock expands the PC by two SFF-8643 interfaces. **SSDs with e.g. U.2 interface** can be connected to these ports by using an optional cable.

NVMe

Specification

- Connectors:
 - 2 x SFF-8643 female
 - 1 x PCI Express x8, V3.0
- Chipset: Broadcom PLX8724
- Data transfer rate up to 32 Gbps
- Supports NVM Express (NVMe)
- Bootable, ex UEFI version 2.3.1
- 10 x LED indicator
- Humidity: 15 ~ 90 %
- Operating temperature: 5 °C ~ 50 °C
- Storage temperature: -25 °C ~ 70 °C

System requirements

- Linux Kernel 4.6.4 or above
- Windows Server 2016
- Windows 7/7-64/8.1/8.1-64/10/10-64
- PC with one free PCI Express x8 / x16 / x32 slot

Package content

- PCI Express card
- Low profile bracket
- User manual

Item no. 90438

EAN: 4043619904389

Country of origin: China

Package: • Box



Images





General

Function:	Bootable, ex UEFI 2.3.1
	NVM Express (NVMe)
Supported operating system:	Windows 7 32-bit
	Windows 7 64-bit
	Windows 8.1 32-bit
	Windows 8.1 64-bit
	Windows 10 32-bit
	Windows 10 64-bit
	Windows Server 2016
	Linux Kernel 4.6.4 or above
LED indicator:	10 x

Interface

Internal:	1 x PCI Express x8, V3.0
	2 x SFF-8643 female

Technical characteristics

Chipset:	Broadcom PLX8724
Operating temperature:	5 °C ~ 50 °C