
Three Phase String Inverter

SUN-18/20/25K-G04 SUN-18/20/25K-G05



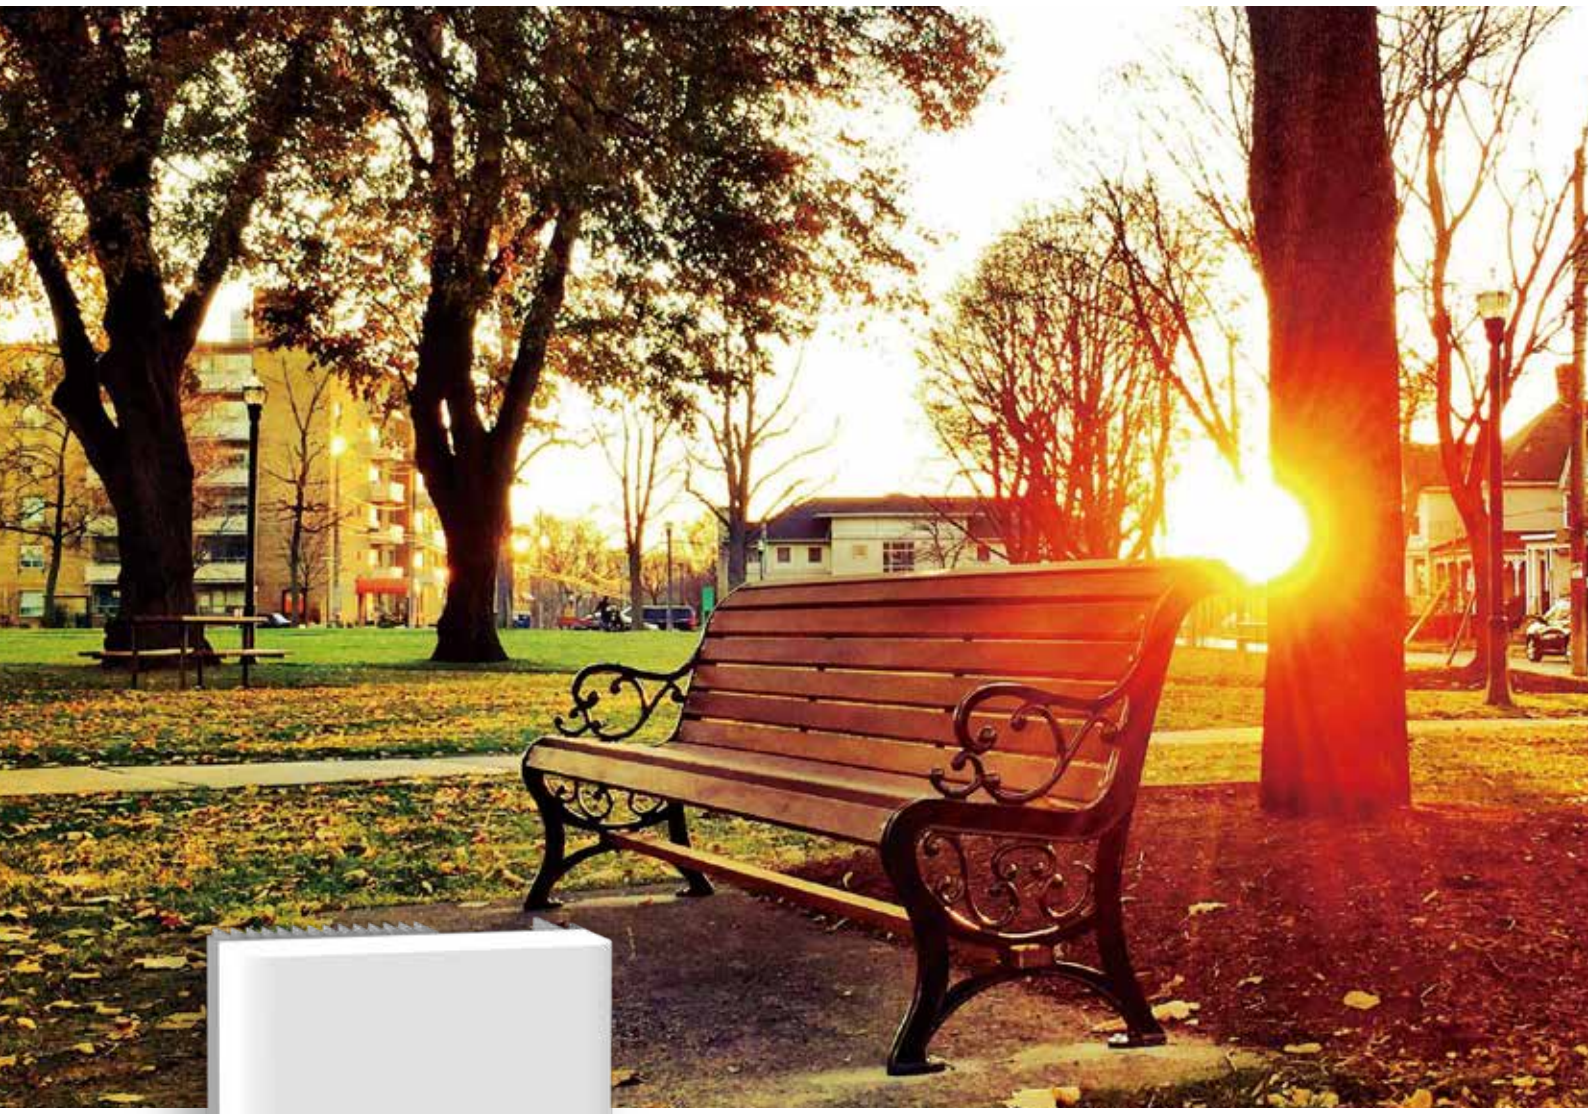

- 2 MPP trackers, Max. efficiency up to 98.6%
- Zero export application, VSG application
- String intelligent monitoring (optional)
- Wide output voltage range
- Anti-PID function (Optional)

Deye

Stock Code: 605117.SH

Technical Data

Model	SUN-18K-G04	SUN-20K-G04	SUN-25K-G04	SUN-18K-G05	SUN-20K-G05	SUN-25K-G05
Input Side						
Max. DC Input Power (kW)	23.4	26	32.5	23.4	26	32.5
Max. DC Input Voltage (V)	1000					
Start-up DC Input Voltage (V)	250					
MPPT Operating Range (V)	200-850					
Max. DC Input Current (A)	32+32			26+26		
Max. Short Circuit Current (A)	48+48			39+39		
No.of MPP Trackers	2					
No.of Strings per MPP Tracker	3+3			2+2		
Output Side						
Rated Output Power (kW)	18	20	25	18	20	25
Max. Active Power (kW)	19.8	22	27.5	19.8	22	27.5
Nominal Output Voltage / Range (V)	3L/N/PE 220/380V, 230/400V					
Rated Grid Frequency (Hz)	50 / 60 (Optional)					
Operating Phase	Three Phase					
Rated AC Grid Output Current (A)	27.3/26.1	30.3/29	37.9/36.2	27.3/26.1	30.3/29	37.9/36.2
Max. AC Output Current (A)	30/28.7	33.3/31.9	41.7/39.8	30/28.7	33.3/31.9	41.7/39.8
Output Power Factor	0.8 leading to 0.8 lagging					
Grid Current THD	<3%					
DC Injection Current (mA)	<0.5%					
Grid Frequency Range	45~55 or 55~65 (Optional)					
Efficiency						
Max. Efficiency	98.6%					
Euro Efficiency	97.8%					
MPPT Efficiency	>99%					
Protection						
DC Reverse-Polarity Protection	Yes					
AC Short Circuit Protection	Yes					
AC Output Overcurrent Protection	Yes					
Output Overvoltage Protection	Yes					
Insulation Resistance Protection	Yes					
Ground Fault Monitoring	Yes					
Anti-islanding Protection	Yes					
Temperature Protection	Yes					
Integrated DC Switch	Yes					
Remote Software Upload	Yes					
Remote Change of Operating Parameters	Yes					
Surge Protection	DC Type II / AC Type II					
General Data						
Cabinet Size (WxHxD mm)	362×577×215 (Excluding Connectors and Brackets)			362×527×220 (Excluding Connectors and Brackets)		
Weight (kg)	23			20		
Topology	Transformerless					
Internal Consumption	<1W (Night)					
Running Temperature	-25-65°C, >45°C Derating					
Ingress Protection	IP65					
Noise Emission (Typical)	≤40 dB					
Cooling Concept	Smart Cooling					
Permissible Altitude (m)	2000			4000		
Warranty	5 Years					
Grid Connection Standard	IEC 61727, IEC 62116, EN 50549, AS 4777.2, VDE-AR-N4105, UNE 217002, VDE 0126, CEI 0-21, OVE-Richtlinie R25, NRS 097					
Operating Surroundings Humidity	0-100%					
Safety EMC / Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2					
Features						
DC Connection	MC-4 Mateable					
AC Connection	IP65 Rated Plug					
Display	LCD1602					
Interface	RS485/RS232/Wifi/LAN					

Ningbo Deye Inverter Technology Co., Ltd.
Add: No. 26 South YongJiang Road, Daqi, Beilun, NingBo, Zhejiang, China. | Tel: 0086-0574-86120560 | E-mail: market@deye.com.cn