Datenblatt - Fiche technique - Data sheet


21.15.2873



ROLINE Patchkabel Kat.6A S/FTP (PiMF), Comp. Level, LSOH, orange, 3,0 m

Cordon ROLINE S/FTP(PiMF) Cat.6A / 10 Gigabit, LSOH, Component Level, orange, 3,0 m

ROLINE S/FTP Patch Cord Cat.6A, Component Level, LSOH, orange, 3.0 m

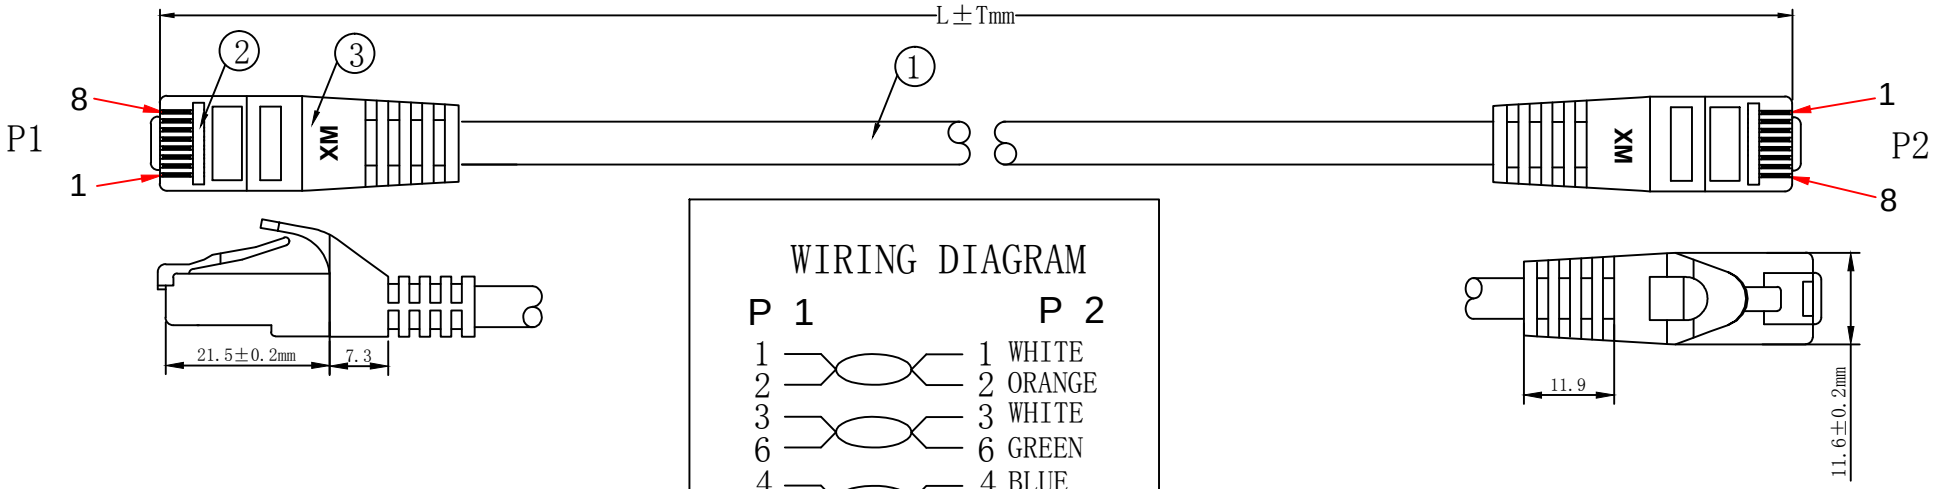

WIRING DIAGRAM

P 1		P 2
1		1 WHITE
2		2 ORANGE
3		3 WHITE
6		6 GREEN
4		4 BLUE
5		5 WHITE
7		7 WHITE
8		8 BROWN
SH		SH

1. ELECTRICAL TEST:
   (1). 100% OPEN SHORT & MISS WIRE TEST;
   (2). INSULATION RESISTANCE:DC 250V 20M OHM MIN;
   (3). CONTACTOR RESISTANCE:30 OHM MAX
2. PRINTING:GHMT® roline CAT.6A S/FTP COMPONENT PATCH CORD LSZH 500MHz ISO/IEC 11801 & EN 50173-1 & ANSI/TIA-568-C.2
3. 100% Component Patch cord Test PASS
4. Minimum bending radius:60mm

MATERIAL LIST

NO.	PARTS NAME	SPECIFICATION STANDARD	QT'Y	REMARK
⑥	LABEL	NO DRY GLUE LABEL	1PCS	
⑤	MINI TIE	PE MINI TIE(POSSESS METAL)	2PCS	
④	POLYETHYLENE BAG	POLYETHYLENE BAG	1PCS	
③	OVER MOLD	88A PVC Orange	2PCS	
②	CONNECTOR	RJ45 8P8C'S SHIELDED PIN GOLD PLATED 3u″,SHELL PLATED NICKEL	2PCS	Transparent Blue
①	CABLE	S/FTP CAT.6A 26AWG (BC*1P+AL-FOIL)*4P+BRAID CABLE JACKET LSOH OD=6.2±0.2MM	1PCS	

COLOUR:Orange (PANTONE:1575C)		
ITEM NO.	LENGTH(L)	TOLERANCE(T)
21.15.2977	300mm	±10mm
21.15.2870	500mm	±15mm
21.15.2871	1000mm	±30mm
21.15.2874	1500mm	±45mm
21.15.2872	2000mm	±60mm
21.15.2873	3000mm	±90mm
21.15.2875	5000mm	±150mm
21.15.2876	7500mm	±210mm
21.15.2877	10000mm	±300mm
21.15.2878	15000mm	±450mm
21.15.2879	20000mm	±600mm

ITEM NO.	21.15.2977	21.15.2870	21.15.2871	21.15.2872	21.15.2873
21.15.2874	21.15.2875	21.15.2876	21.15.2877	21.15.2878	21.15.2879
DESC.	ROLINE S/FTP PatchCord CAT.6A,LSOH,Comp.Level,Orange				

BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		NEW	2016-09-13	A

SECOMP