


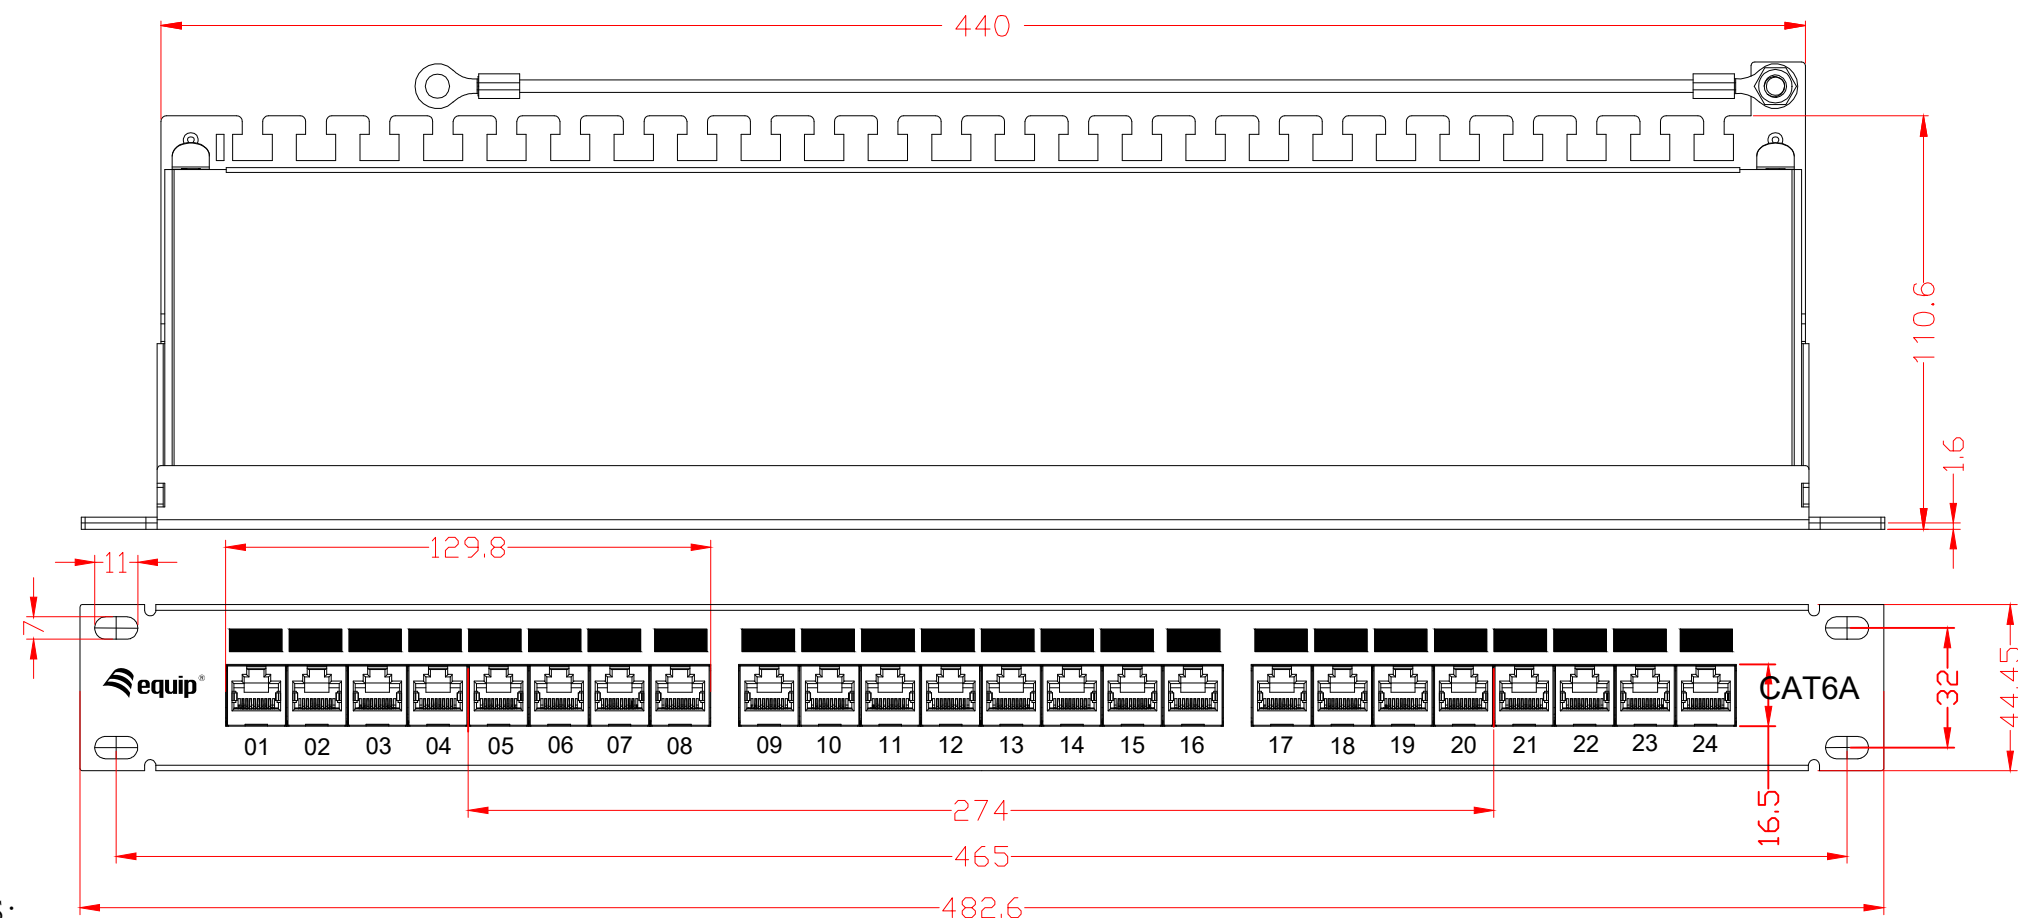

Grey spray 

Black spray 

length:27.5MM

NOTES:

ELECTRICAL:


1. VOLTAGE RATING:125 VAC RMS
2. CURRENT RATING:1.5AMP
3. CONTACT RESISTANCE:100MILLIOHMS MAX
4. INSULATION RESISTANCE:1000 MEGOHMS MIN @500 VDC
5. DIELECTRIC STRENGTH:750 VAC RMS 60Hz, 1MIN

ENVIRONMENTAL:

1. STORAGE:-40° TO +85°
2. OPERATION:0° TO 70°

MECHANICAL:

1. HOUSING MATERIAL:PBT UL94V-0;
2. PANEL FRAME:CARBON STEEL, POWDER, COATING IN BLACK COLOR, Spec1.6mm;
3. PCB MATERIAL:FR-4 T=1.6mm;
4. IDC MATERIAL:PC, CONTACT:PHOSPHOR BRONZE; WITH NICKEL PATING;
5. RJ45 JACK LIFE:750 TIMES MIN;
6. IDC LIFE:200 TIMES MIN;
7. WIRE:AWG 22-26;

											
					Material					Item No.	326525
SYM	Number	Bill No. of Alteration	Signature	Date	Angles Projection		Size	Scale	Unit	Part Name	24-Port Cat.6A Shielded Patch Panel
Drawn	Ding jian bo	2015.1.6	Tolerance				A4	X:1	mm	ERP	
Checked	Ge pei jun	2015.1.6	0.00-20.00 ±0.10 20.00-50.00 ±0.15 50.00-100.00 ±0.20								
Approved	Wang wei jun	2015.1.6	100.00- Angle ±0.25 ±30'								
					Sheet		1 OF 1		Version: A/0		Part No.