


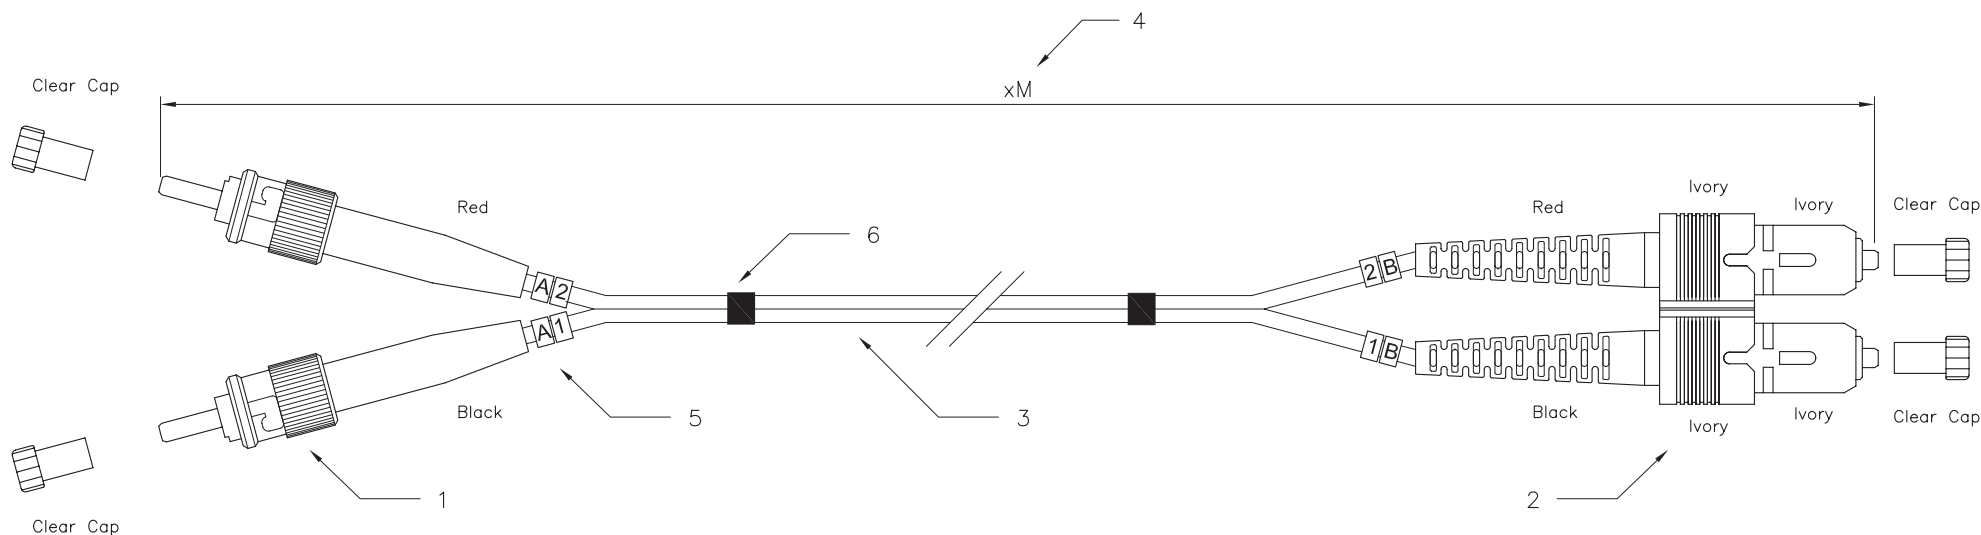

Specification:

1. Connector Type: ST/PC Multimode
2. Connector Type: SC/PC Multimode
3. Cable Type:
Zipcord cable, $\varnothing$ 3.0mm 62,5/125 μ m Multimode,
Cable Jacket: color/orange, material/Low Smoke Zero Halogen (LSOH)
4. Length: xM = 1m, 2m, 3m, 5m
5. Cable Marker
6. Shrink Tube

Performance:

- a. Insertion Loss: < 0.5 dB
- b. Fiber Extension: $-0.05\mu\text{m} < H < +0.05\mu\text{m}$
- c. Ferrule End-face Radius $10 < R < 30\text{mm}$
- d. Apex Offset: < 50 μm
- e. Increase in insertion loss after 500 mating: 0.2 dB max.
- f. Operation Temperature: -20° to + 70°C
- g. Storage Temperature -40° to +80°C
- h. Humidity (non-condensing) 95% RH

252321	-> 1.0m
252322	-> 2.0m
252323	-> 3.0m
252325	-> 5.0m

GENERAL TOLERANCE OF DIMENSIONS

X.XXX	± 0.005
X.XX	± 0.05
X.X	± 0.1



Fiber Optic Patch Cord Duplex ST/SC 62.5/125 μ orange, LSOH