



ICY BOX® IB-CR601M-C31

M.2 NVMe/SATA SSD enclosure with CFexpress card reader

Key features

- For M.2 NVMe SSD in length 2280
- Card reader for CFexpress Type-B memory card
- Host connection via USB 3.2 Gen 2 Type-C® to Type-C®/A with up to 10 Gbit/s
- Support UASP function
- Thermal pad and heatsink for SSD cooling included
- Aluminium enclosure supports heat dissipation during SSD operation
- Type-C® to Type-A cable for power supply included
- 2x LED indicator for power and memory card operation



Packing content

- 1x IB-CR601M-C31
- 1x USB 3.2 Gen 2 Type-C® to Type-C®/A cable (40 cm)
- 1x Heatsink, 1x Thermal pad, 1x Screw, 2x Rubber fixation, 1x Screwdriver, 1x PSU Type-C® to Type-A (90 cm)
- 1x Manual




Memory card reader

The IB-CR601M-C31 is equipped with a CFexpress Type-B memory card reader, offering a feature that is rarely found in SSD enclosures. This built-in card reader allows users to transfer data from memory cards, making it ideal for photographers, videographers, and other media professionals.



M.2 NVMe SSD

This enclosure supports both M.2 NVMe and SATA SSDs, offering reliable storage for different types of drives. Whether you're using a PCIe Gen 3x2 NVMe SSD for fast data access or a SATA SSD for stable performance, the IB-CR601M-C31 meets your needs.

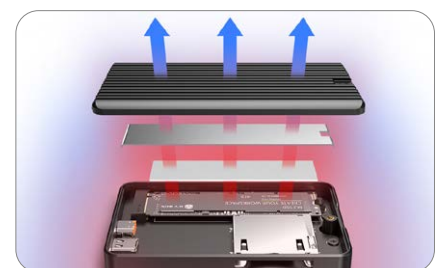

Cooling

Built with a heatsink and aluminium housing with thermal fins, the enclosure ensures optimal cooling, keeping your SSD and memory card at a safe temperature during heavy use. This design prevents overheating, extending the lifespan of your storage devices and maintaining consistent performance.

Offers and deliveries are only done under our General Terms and Conditions. Errors and omissions excepted.



ICY BOX® IB-CR601M-C31

M.2 NVMe/SATA SSD enclosure with CFexpress card reader

General data

Model	IB-CR601M-C31
Article no.	61153
EAN code	4250078174875
Colour	Black
Material	Aluminium, plastic
Interface to host computer	USB 3.2 Gen 2 Type-C®/A
Length of cable	40 cm
Transfer rate	Up to 10 Gbit/s
UASP support	Yes
Plug & Play	-
LED	Power and memory card access
ON/OFF button	-
Chipset	-

Drive data

Drive size	22x 80 mm
Drive height	-
Drive interface	M.2 NVMe (PCIe Gen 3x2), M.2 SATA
Drive capacity	-
Supported M.2 card keys	-
Space required	-
Clone function	-
HotSwap	-

RAID data

RAID level	-
Auto rebuilding	-
Alarm	-

Additional features

Additional interfaces	CFexpress Type-B card reader
Display	-
Control buttons	-
Lock	-
Kensington Lock	-
Degree of protection	-
Cooling	Passive
Fan volume (in Sone)	-

Power

Power supply	Via additional Type-C® to Type-A cable (included)
Plug dimension	-

Host system

Relative humidity	-
Operating temperature	-
Operating system	Windows®, macOS®
System requirements	Computer with USB 3.2 Gen 2 Type-C® or Type-A port

Logistical data

Packing unit	40 pcs. / carton
Total weight	11.18 kg
Gross weight (with packing)	0.220 kg
Net weight	0.115 kg
Dimension/carton	500x230x305 mm
Dimension (with packing)	200x105x30 mm
Dimension of article	60x97x18 mm
Country of origin	Taiwan

Offers and deliveries are only done under our General Terms and Conditions. Errors and omissions excepted.