**Color Variants**

RB282204
with fresh cooling
fully integrated

**Included accessories**

2 x cold accumulator.
2 x egg tray.
1 x wine and champagne rack.
1 x ice cube tray.

**RB282204**
**Fridge-freezer combination 200 series**
**with fresh cooling**
**fully integrated**
**Niche width 56 cm, Niche height 177.5 cm**

**Three climate zones incl. one fresh cooling drawer with manually adjustable humidity**
**Height adjustable safety glass shelves**
**Door racks with aluminium profiles**
**Innovative defrost technology:**
**- Reduced energy consumption due to new evaporator design**
**- Faster defrosting and easier cleaning due to less severe and more uniform ice build-up**
**- Safety glass shelf between freezer drawers**
**Net volume 270 litres**
**Cushioned door closing system allowing a soft and controlled door closure**

**Handling**

Electronic temperature control with digital display.
Touch keys.

**Features**

Cushioned door closing system from 20° door opening angle, integrated in door hinge.
Open-door and malfunction alarm.
Integrated WiFi module for digital services
(Home Connect).
The availability of the Home Connect functionality depends on the availability of the Home Connect Services in your country. Home Connect Services are not available in every country – for further information please check: www.home-connect.com

**Cooling**

Net volume 190 litres.
Fast cooling.
Automatic defrosting with defrost water evaporation.
Temperature adjustable from +2 °C to +8 °C.
5 safety glass shelves, of which
1 is fully extendable and 4 height adjustable.
Wine and champagne rack for 4 bottles, can be completely folded.
1 large door rack with aluminium profile for bottles with flexible bottle holder.
4 door racks with aluminium profile.
Bright interior lighting with integrated glare-free side light elements.

**Fresh cooling**

1 full width fresh cooling drawer.
Humidity can be adjusted manually.
Ideal for fruit and vegetables.

**Freezing**

Net volume 61 litres.
Fast freezing.
Temperature adjustable from -16 °C to -24 °C.
4-star freezer compartment.
Defrost assistance.
Freezing capacity 7 kg/24 h.
Storage time after a malfunction 26 h.
2 freezer drawers, 1 of which extra large.
1 safety glass shelf.

**Product rating**

Energy efficiency class A++ at a range of energy efficiency classes from A+++ to D.
Energy consumption 225 kwh/year.
Noise level 36 dB (re 1 pW).

**Planning notes**

**Characteristics**

**Construction type**
Built-in
**Door panel options**
Not possible
**Height (mm)**
1772
**Width of the product (mm)**
558
**Depth of the product**
545
**Required niche size for installation (HxWxD)**
1775.0 x 560 x 550
**Net weight (kg)**
67.842
**Connection rating (W)**
90
**Current (A)**
10
**Door hinge**
Right reversible
**Voltage (V)**
220-240
**Frequency (Hz)**
50
**Approval certificates**
CE, VDE
**Length of electrical supply cord (cm)**
230
**Energy efficiency class**
**Energy consumption (kWh)**
**Total annual energy consumption (kWh)**
**Refrigerator Net capacity (l)**
**Freezer Net capacity (l)**
**Freezing capacity (kg)**
**Storage Period in Event of Power Failure (h)**
26
**Number of compressors**
1
**Number of independent cooling systems**
2
**Interior ventilator**
No
**Reversible Door Hinge**
Yes
**Number of Adjustable Shelves in fridge compartment (Stck)**
4
**Shelves for Bottles**
Yes
**EAN code**
4242006276331

**Consumption and connection features**

**Brand**
Gaggenau
**Product name / Commercial code**
RB282204
**Energy efficiency class (2010/30/EC)**
A++
**Energy consumption annual (kWh/annum) - NEW (2010/30/EC)**
225.00
**Refrigerator Net capacity (l) - NEW (2010/30/EC)**
209
**Freezer Net capacity (l) - NEW (2010/30/EC)**
61
**Frost free system**
No
**Temperature rise time (h)**
26
**Freezing capacity (kg/24h) - NEW (2010/30/EC)**
7
**Climate class**
SN-T
**Noise level (dB(A) re 1 pW)**
36
**Installation type**
Full-integrated

**created on 2019-02-13**


Flat hinge.
Door hinge right, reversible.
Door opening angle of 115°, fixable at 90°.
Max. door panel weight:
Upper door 14 kg.
Lower door 19 kg.

**Connection**

Total connected load 0.09 kW.
Connecting cable 2.3 m with plug.

GAGGENAU

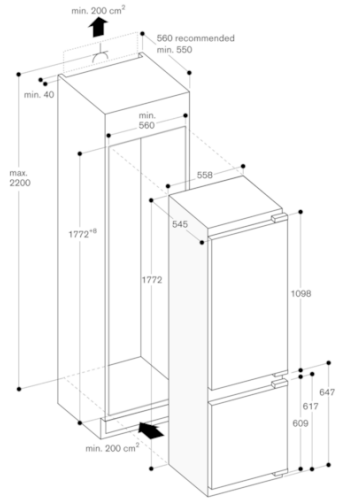
min. 200 cm²
560 recommended
min. 550
min. 40
min.
560
558
max.
2200
1772+5
545
1772
1098
647
617
609
min. 200 cm²

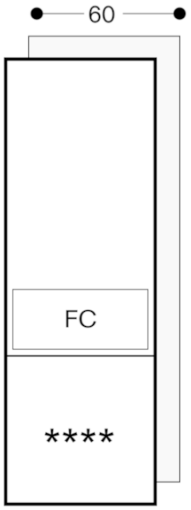
60
FC
****