




Delock External USB Type-C™ Combo Enclosure for M.2 NVMe PCIe or SATA SSD

Description

This enclosure by Delock enables the installation of an **M.2 PCIe NVMe SSD or SATA M.2 SSD** in 2280, 2260, 2242 and 2230 format. It can be connected via USB to the PC or laptop. The **robust metal housing with cooling fins** ensures an optimum temperature of the memory.

Combo enclosure

The big advantage of this Delock M.2 enclosure is that **both SATA and PCIe (NVMe) M.2 SSDs** can be inserted into the enclosure. The memory is automatically recognized by the chipset and can then be used.

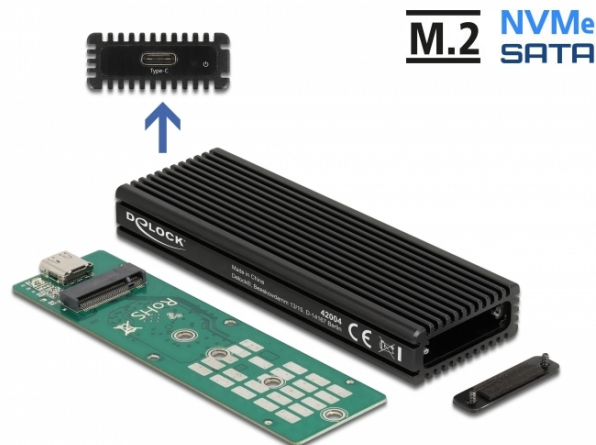

Specification

- Connectors:
 - external: 1 x SuperSpeed USB 10 Gbps (USB 3.2 Gen 2) USB Type-C™ female
 - internal: 1 x 67 pin M.2 key M slot
- Chipset: Realtek RTL9210B
- Supports M.2 modules in format 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA or PCIe (NVMe)
- Maximum height of the components on the module: 1.5 mm, application of double-sided assembled modules supported
- Supports NVM Express (NVMe)
- Bootable
- Data transfer rate up to 10 Gbps
- LED indicator for power and access
- Metal housing
- Dimensions (LxWxH): ca. 104 x 36 x 14 mm
- Hot Plug, Plug & Play

System requirements

- Android 10.0 or above
- Chrome OS 83.0 or above
- iPad Air (2020)
- iPad Pro (2018)
- Linux Kernel 5.4 or above
- Mac OS 10.15.7 or above
- Surface Pro 7
- Windows 8.1/8.1-64/10/10-64
- PC or laptop with a free USB Type-C™ or Thunderbolt™ 3 port

Package content

- External enclosure M.2
- Cable USB-C™ male to USB-C™ male, length ca. 45 cm
- 1 x thermal conductive pad
- Screwdriver
- Mounting material
- User manual

Item no. 42004

EAN: 4043619420049

Country of origin: China

Package: • Retail Box



Images





General	
Function:	NVM Express (NVMe) Plug & Play
Supported operating system:	Android 10.0 or above Chrome OS 83.0 or above Linux Kernel 5.4 or above Mac OS 10.15.7 or above Surface Pro 7 Windows 10 32-bit Windows 10 64-bit Windows 8.1 32-bit Windows 8.1 64-bit iPad Pro (2018) • iPad Air (2020)
Supported module:	M.2 modules in format 2280, 2260, 2242 and 2230 with key M or key B+M based on SATA or PCIe
Maximum height of the components on the module:	1.5 mm application of double-sided assembled modules supported
Interface	
External:	1 x SuperSpeed USB 10 Gbps (USB 3.2 Gen 2) USB Type-C™ female
Internal:	1 x 67 pin M.2 key M slot
Technical characteristics	
Chipset:	Realtek RTL9210B
Data transfer rate:	up to 10 Gbps
Physical characteristics	
Housing material:	Aluminium
Cable length:	45 cm
Length:	104 mm
Width:	36 mm
Height:	14 mm
Colour:	black