

# Digitus® USB-A extension cable, 1.8m

AK-300203-018-S

EAN 4016032283355



## USB 3.0 extension cable, type A M/F, 1.8m, USB 3.0 conform, bl

For extending USB 3.0 cables or devices (with USB A plug). Transfer rate up to 5 Gbps (super speed).

**The dense shielding enables a reliable and fast connection of external USB 3.0 devices to the PC, even over longer distances.**

### Attributes




- Assortment: USB Cables
- AWG: 28
- Color cable: black

- Color connector: black
- Connector 1: USB A, plug
- Connector 2: USB A, jack
- Connector surface: nickel-plated
- Ferrite filter: none
- Hoods: molded
- USB compliance: USB 3.0 / 3.1
- Wire material: CU
- Length: 1.8 m
- Shielding: triple shielding

## Logistics

|                              | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm³       |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------|
| Packaging Unit Carton        | 120          | 10.70       | 51.50      | 33.00      | 22.00       | 37,389.00 |
| Packaging Unit Inside        | 10           | 0.89        | 6.00       | 32.00      | 32.00       | 6,144.00  |
| Packaging Unit Single        | 1            | 0.09        | 2.00       | 16.00      | 23.00       | 736.00    |
| Net single without Packaging | 1            | 0.09        | 2.00       | 16.00      | 23.00       | 0.00      |

## More images:

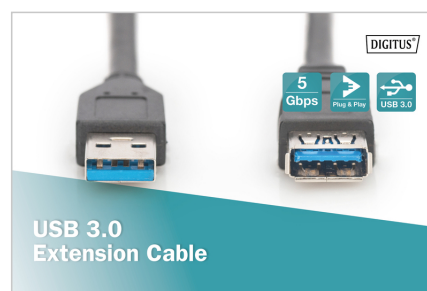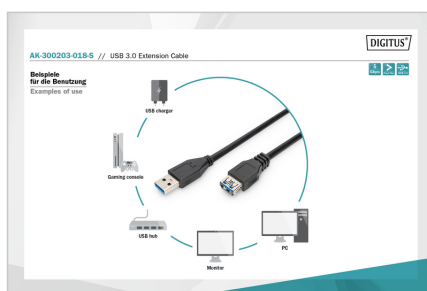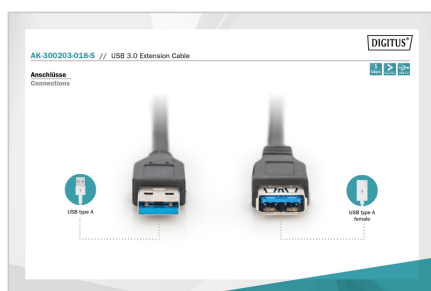



## Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

## EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)