
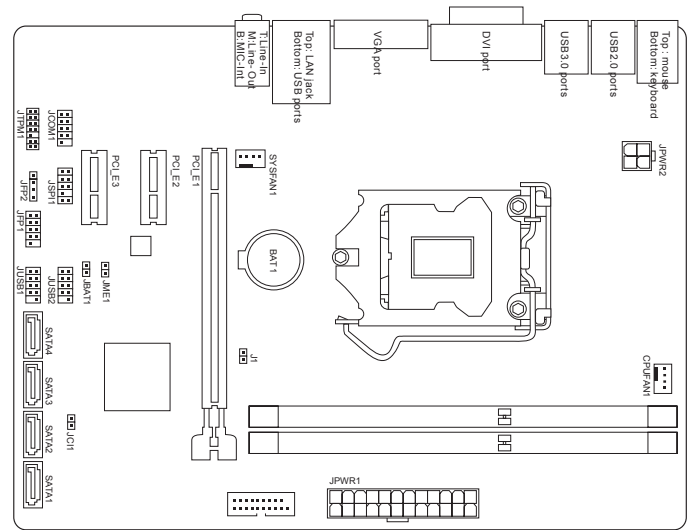


H81M PRO-VD

(MS-7846v5.0)

m-ATX Motherboard

Support 4th Generation Intel® Core Processors for LGA 1150 socket

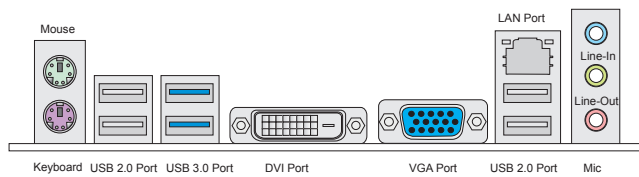

Motherboard Specification

Processor Support - Support 4th Generation Intel® Core Processors for LGA 1150 socket Base Clock 100 MHz Chipset - Intel® H81 chipset Memory Support 2 DDR3 DIMMs support 1066/ 1333/ 1600 DRAM (32GB Max) - Supports Dual-Channel mode LAN - Supports Gb LAN 10/100/1000 by Realtek® RTL8111G Audio - Chip integrated by Realtek® ALC887 - Flexible 8-channel audio with jack sensing - Compliant with Azalia 1.0 Spec SATA 2 SATA 6Gb/s (SATA1~2) port by Intel® H81 2 SATA 3Gb/s (SATA3~4) ports by Intel® H81 USB3.0 / 2.0 2 x USB 3.0 ports by VIA® VL806 (2 Front) 2 x USB 3.0 ports by Intel® H81 (2 Rear) 8 x USB 2.0 ports by Intel® H81 (4 Rear/4 Front)	Connectors - Back panel 1 PS/2 keyboard port 1 PS/2 mouse port 4 USB 2.0 ports 2 USB 3.0 ports 1 VGA port 1 DVI port 1 LAN port 3 flexible audio port - On-Board 2 USB 2.0 connectors 1 USB 3.0 connectors 1 Chassis Intrusion connector 1 Front Panel Audio connector 1 Serial port connector 1 TPM Module connector Slots 1 PCIE x16 slot 2 PCIE x1 slots Form Factor - Micro-ATX (23.1 cm X 17.3 cm) Feature on Focus - Command Center - M-Flash included - SATA 6G - USB3.0 Mounting 6 mounting holes
--	---

These specification is subject to change without prior notice.