


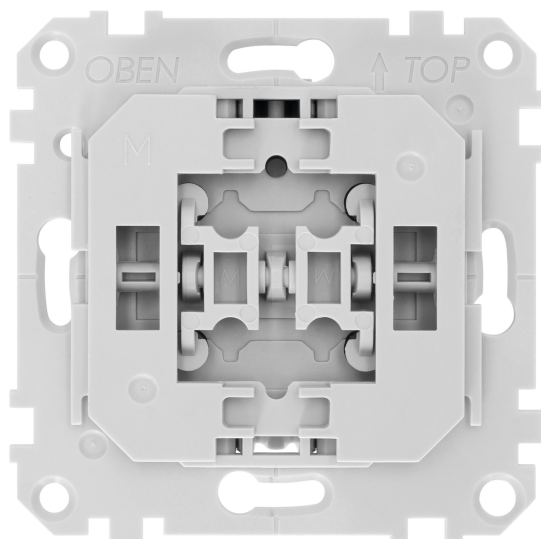

Series switch flush mount, M

Compatible with Merten switch ranges

EAN	Colour	Item no.	Weight (Box)	Weight	Device (W x H x D)	Box
4019588294981	light gray	0200/9498	130 g	70 g	7.00 x 7.00 x 4.50 cm	11.50 x 10.50 x 5.80 cm

TOP FEATURES

Integration/control with TechniSat CONNECT

Device for flush mounting in standard device boxes

Compatible with Merten switch ranges

Measuring of energy consumption

Integrated scene control

Integrated Z-Wave™ repeater function

Electronic overload protection

AMBIENT STORAGE CONDITIONS

Temperature : -20 ... 60 °C

Humidity : 5 ... 90 %

AMBIENT OPERATING CONDITIONS

IP class : 20

Ambient temperature : 5 ... 35 °C

Humidity : 10 ... 75 %

FUNK COMMUNICATION

Telecommunication : Z-Wave Plus

funk_security_s2 : Yes

funk_smartstart : Yes

Range inside : max. 40 m

operating frequency : 868.42 MHz

Repeater function : Yes

POWER SUPPLY

Frequency : 50 Hz ± 10 %

Nominal voltage : 230 V ± 10 %

Effective output : 1150 W

Power consumption : < 2 mA (without load)

SCOPE OF DELIVERY

Series switch insert, compensation frame, assembly instructions, fastening screws

