
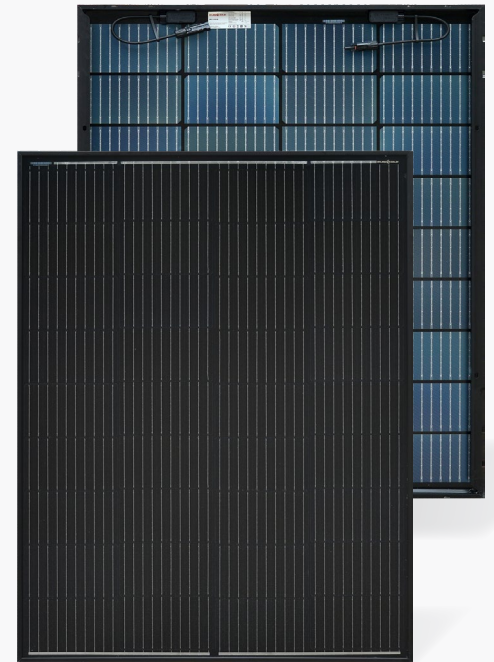
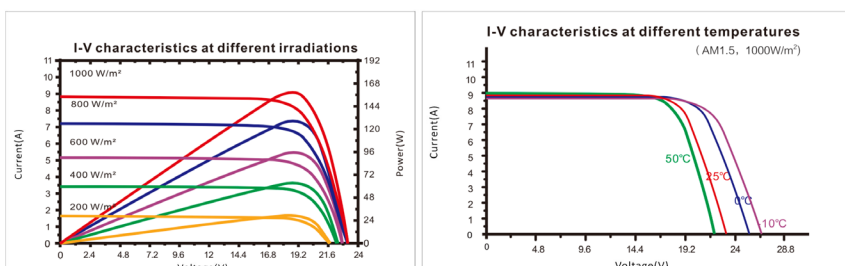


Bifacial Double Glass Solar Module 150W 12V

Electrical characteristics

SKU	1170150
EAN Code	4260558571117
Maximum Power (Pmax)	150Wp
Voltage at Pmax (Vmp)	20.6V
Current at Pmax (Imp)	7.29A
Open-circuit Voltage (Voc)	24.2V
Short-circuit Current (Isc)	7.91A
Temperature coefficient of Voc	-0.36%/K
Temperature coefficient of Isc	0.05%/K
Temperature coefficient of Power	-0.44%/K
Normal operating cell Temperature	44 ± 2°C
Operating Temperature	-40 ~ +85°C
Maximum System Voltage	1000 VDC
Power Tolerance	0 ~ +3%
Junction box	IP65
Bypass diodes	2 pcs
Solar Cell	Mono 36 (4 × 9)
Connection cable and connector	4mm ² x 90cm, Solar Stecker (+/-)
Performance guarantee	25 years
Dimension (mm)	1010 × 765 × 30
Weight (kg)	9.8

Module diagram and characteristic curve

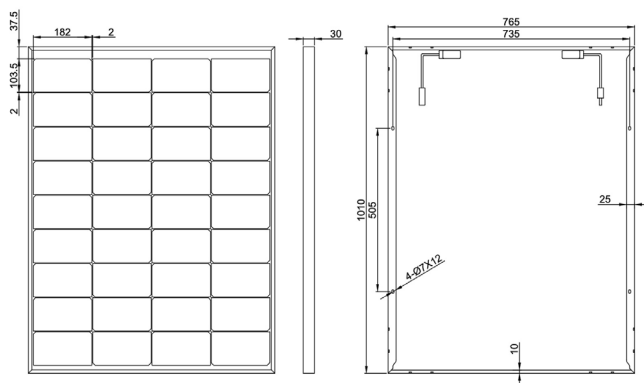

- 182mm cells, 10 busbars
- 23.1% cell efficiency
- +3% Plus Tolerance Sorted
- reinforced aluminum frame
- TÜV Saar certified
- 25-year Product guarantee



SolarV GmbH

Am Kronberger Hang 2, 65824 Schwalbach a.T.



+49 (0)61969076877

info@solarv.de

www.solarv.de

*Measured at standard test conditions: irradiance 1.000W/m², air mass 1.5 spectrum, temperature 25°C
Electrical parameters may vary by -5% to +5%