

PRODUCT DATASHEET

SF CIRCULAR 400 24 W 3000 K IP44 WT

SURFACE CIRCULAR 400 | Wall and ceiling luminaire with IP44



Areas of application

- Corridors
- Stairways
- Bathrooms
- Foyers

Product benefits

- High luminous efficacy
- Energy savings of up to 55 % compared to luminaires that use CFL
- Easy and quick installation
- Very homogenous light
- 3 years guarantee

Product features

- Beam angle: 120°
- Type of protection: IP44 (ceiling mounting), IP20 (wall mounting)
- Impact resistance: IK03
- Metal housing, PMMA cover
- Ambient temperature in operation: -20...+40 °C



TECHNICAL DATA

Electrical data

Nominal wattage	24.00 W
Operating mode	Integrated LED driver
Nominal voltage	220...240 V
Nominal current	190 mA
Inrush current	15 A
Inrush current time T_{h50}	200 μ s
Power factor λ	> 0,5
Mains frequency	50...60 Hz
Max. no. of lum. on circuit break. B16 A	30
Max. no. of lum. on circuit break. C10 A	25
Max. no. of lum. on circuit break. C16 A	41
Total harmonic distortion	< 120 %

Luminaire control gear data

Low flicker	Yes
Output current	172 mA


Photometrical data

Color temperature	3000 K
Luminous flux	1920 lm
Luminous efficacy	80 lm/W
Light color (designation)	Warm White
Standard deviation of color matching	≤ 5 sdcm
Color rendering index Ra	> 80

Light technical data

Beam angle	120 °
------------	-------

Dimensions & weight



Diameter	400.00 mm
Height	120.00 mm
Product weight	708.00 g

Colors & materials

Body material	Steel
Product color	White
Housing color	White
Cover material	Polymethylmethacrylate (PMMA)
Light emitting surface material	PMMA

Temperatures & operating conditions

Ambient temperature range	-20...+40 °C
---------------------------	--------------

Lifespan

Number of switching cycles	100000
Lifespan	30000 h
Lifespan L70/B50 at 25 °C	30000 h
Lifespan L80/B10 at 25 °C	22000 h
Lifespan L90/B10 at 25 °C	15000 h

Additional product data

Mounting type	Surface
Mounting location	Ceiling / Wall
Low flicker	Yes


Capabilities

Dimmable	No
Type of connection	Screw terminal, 3-Pole


LED module replaceable	Not replaceable
------------------------	-----------------

Certificates & standards

Protection class IK (shock resistance)	IK03
Glow Wire Test according to IEC 60695-2-12	650 °C
Photobiological safety group acc. to EN62778	RG0
Protection class	I
Type of protection	IP44
Ball shot safe	No
Standards	CE / CB / TÜV SÜD / EAC / RoHS

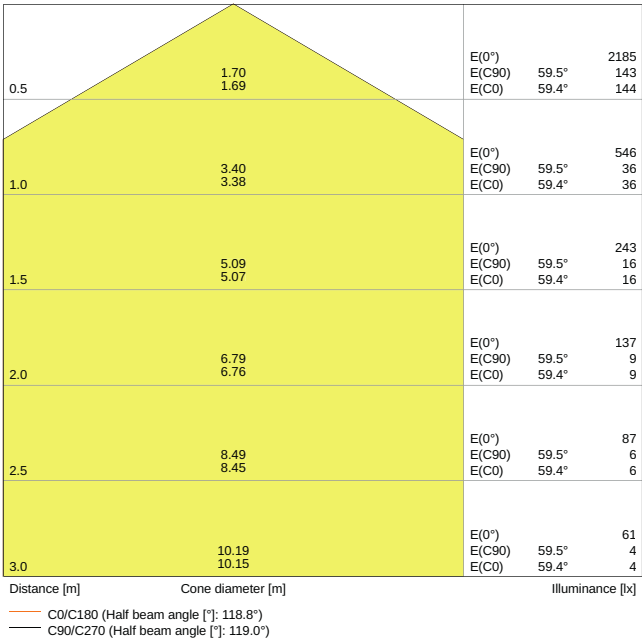

LDC typ cone

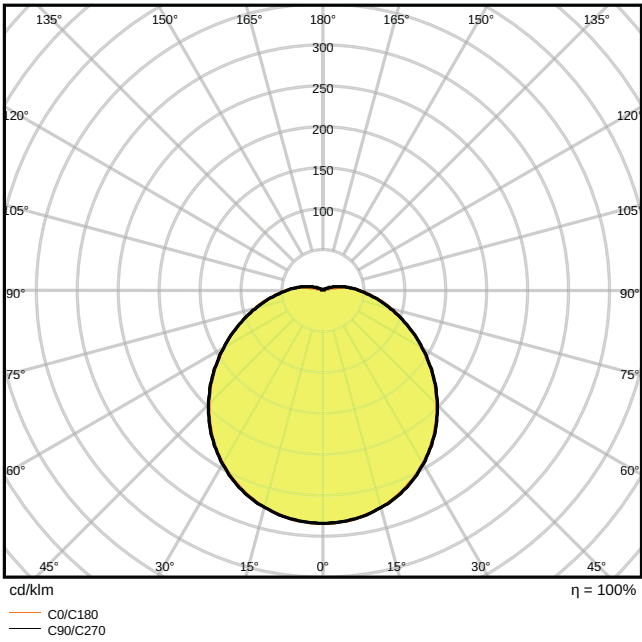

LDC typ polar

LOGISTICAL DATA

Temperature range at storage	-25...+70 °C
------------------------------	--------------

EQUIPMENT / ACCESSORIES

- Replacement cover optional available

DOWNLOAD DATA


DOWNLOAD DATA	
	User instruction SURFACE CIRCULAR
	PRODUCT DATASHEET SURFACE-C LED 24 W 3000 K
	Tender documents Tender Text 4058075080058
	Certificates EAEC N RU D-DE.MYu62.B.02016 20 14.07.2020-13.07.2025
	Declarations of conformity EU Declaration of Conformity SF Circular 350 400 IP44 LEDV
	Declarations of conformity Attestation-of-Conformity SF Circular TÜV
	On-Pack-Info Legal Insert Surface
	IES file (IES) Surface-C LED 400 24W 3000K
	LDT file (Eulumdat) Surface-C LED 400 24W 3000K
	R3D file (Relux 3D Model) Surface circular 400
	M3D file (3D Model) Surface_Circular_400
	ULD file (DIALux) SURFACECIRCULAR40024W3000KIP44WT
	UGR file (UGR table) Surface-C LED 400 24W 3000K

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075080058	Folding box 1	440 mm x 440 mm x 135 mm	1090.00 g	26.14 dm ³
4058075080065	Shipping box 5	660 mm x 460 mm x 460 mm	6060.00 g	139.66 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

ADDITIONAL CATALOG INFORMATION



References / Links

- For Guarantee see www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.