Equip Basic Flex 19" Free Standing Server Cabinet, 42U, 800x1000mm, with Perforated Steel Front Door, Removable and Lockable Panels, Assembled, RAL7035 Grey

Product Images

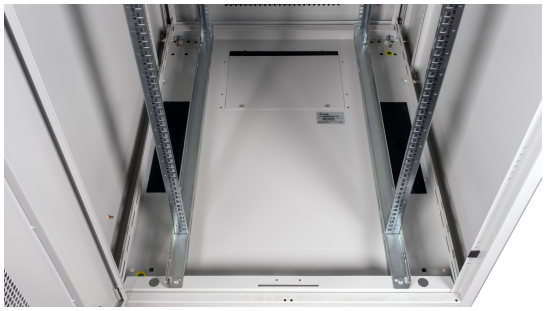




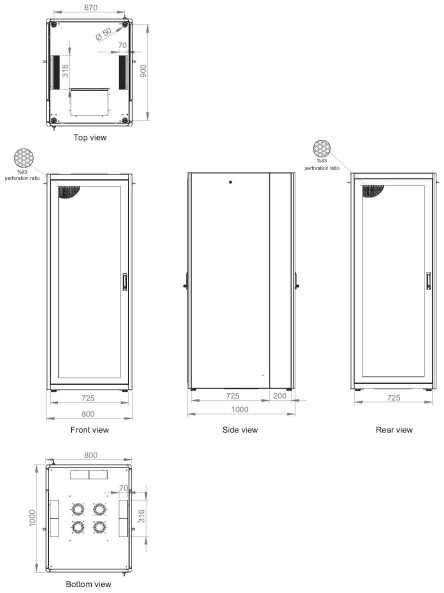


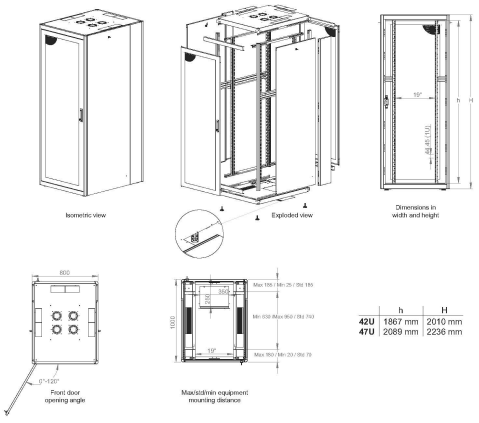







equip


670
Ø 150
70
316
800
Top view
543
perforation ratio
Front view
725
800
725
200
1000
Side view
543
perforation ratio
725
Rear view
800
70
1000
316
Bottom view


Isometric view
Exploded view
Dimensions in
width and height
800
0°-120°
Front door
opening angle
1000
Max/std/min equipment
mounting distance
h
H
42U 1867 mm 2010 mm
47U 2089 mm 2236 mm

Short Description

- 42U cabinet, designed for optimal performance in every space
- 800X1000MM Server Cabinet
- Ships preassembled for easy setup at your location
- The cabinet comes with a steel/perforated frontdoor to combine durability with optimal cooling efficiency
- Sidepanels are removable and lockable
- Backpanel is removable

Description

These cabinets, of the Basic Flex Line, are engineered for the efficient and user-friendly installation of both active and passive network components, prioritizing streamlined cable management. Crafted from steel sheets up to 1.5 mm thick, every cabinet guarantees excellent stability, attributed to a unique plate curving technique, forming a sturdy steel framework. They are finished with a powder coating in shades of grey (RAL 7035) and black (RAL 9005). For challenging set-up locations that are less accessible, the cabinet is designed to be disassembled. The doors are easily detachable, and their stops can be switched between right and left orientations. Additionally, the roof is prepped for the integration of an air ventilation unit. Inside, each cabinet houses two sets (4 pieces) of 483 mm (19") profile rails. These rails, galvanized and marked with height units readable from both directions, are adjustable in depth. To facilitate extensive equipment installations, they're paired with supplementary depth support bars. Cable management is central to the design. The cabinet base features a punched-out cable entry shielded with a metal plate. For the broader 800 mm width cabinets, there are added punched-out cable entries covered with plastic on both sides. These entries are replicated on the roof, with a single one for 600 mm width cabinets and three for the 800 mm width ones. To cater to diverse operational needs, a wide assortment of accessories, including cable management tools and shelves, is readily available.

Additional Information

Wall mountable.	No
Number of cartons per pallet.	1 piece
Pallet Net Weight.	14200 gram
Pallet Gross Volume.	142560 cubic_centimeter
Package Volume.	102168000 cubic_centimeter
Maximum number of stacking cartons.	1 piece
Pallet Net Depth.	1080 millimeter
Pallet Net Width.	880 millimeter
Pallet Net Height.	150 millimeter
Manual.	Yes
Mounting kit.	No
Max. Weight Capacity.	600 kilogram
Key lock.	Yes
Housing Material.	Steel
Built-in UPS.	No
Rack rails.	Yes
Frame type.	Closed
Feet adjustment.	30 millimeter
Assembly Required.	No
Soundproof.	No
Castor wheels.	No
Rack Type.	Freestanding rack
Rack capacity.	42U
Removable Back Door.	No
Removable Front Door.	Yes
Max. Weight Capacity On Wheels.	600 kilogram

Back Door Construction.	Steel/Perforated
Side Panel Construction.	Steel
Side Panel Key Lock.	Yes
Back Door Key Lock.	Yes
Front Door Key Lock.	Yes
Side panels included.	Yes
Rack rail thickness.	1.5 millimeter
Stabilizing foot screw.	Yes
Number of stabilizing foot screws.	4 piece
Adjustable stand.	No
Monitoring.	No
Main PDU.	No
Product design.	4-Post
Cooling type.	Passive
Front Door Opening Angle.	200 degree
Removable Side Panels.	Yes
Number of Layers per Pallet.	1 piece
Pallet Gross Weight.	132500 gram
Harmonized System (HS) code.	853710
Customs product code (TARIC).	8537109899
Carbon Footprint.	19.4598 kilogram
Quantity per Pallet.	1 piece
Sustainability Compliance.	Yes
Screws included.	No
Wall mounting kit.	No
Temperature sensor.	No
Plinth panel.	No

Nuts included.	No
Grounding kit.	Yes
Quantity per Pack.	1 piece
Package Depth.	1080 millimeter
Package Height.	2150 millimeter
Package Width.	880 millimeter
Quick installation guide.	No
Product Gross Weight.	4500 gram
Adjustable feet.	Yes
Adjustable depth.	No
Cable management.	No
Preassembled.	Yes
Package Content.	Grounding set
Color.	Light Grey
RAL Code.	RAL7035
Model Number.	EBF-42-8010-G-CCAA
Rail to Rail Length.	19 inch
Product Height.	2010 millimeter
Product Width.	800 millimeter
Product Depth.	1000 millimeter
Material Thickness.	73.5 millimeter
Internal Height.	1867 millimeter
Internal Width.	795 millimeter
Min. Rack Depth.	630 millimeter
Max. Rack Depth.	950 millimeter
Internal Depth.	995 millimeter
Product Net Weight.	113800 gram

