
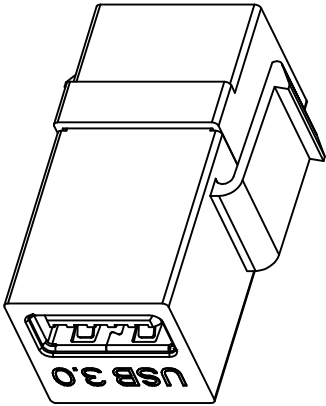


CONFIGURATION DETAILS OF
UNDIMENSIONED FEATURES
MAY VARY

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A0			

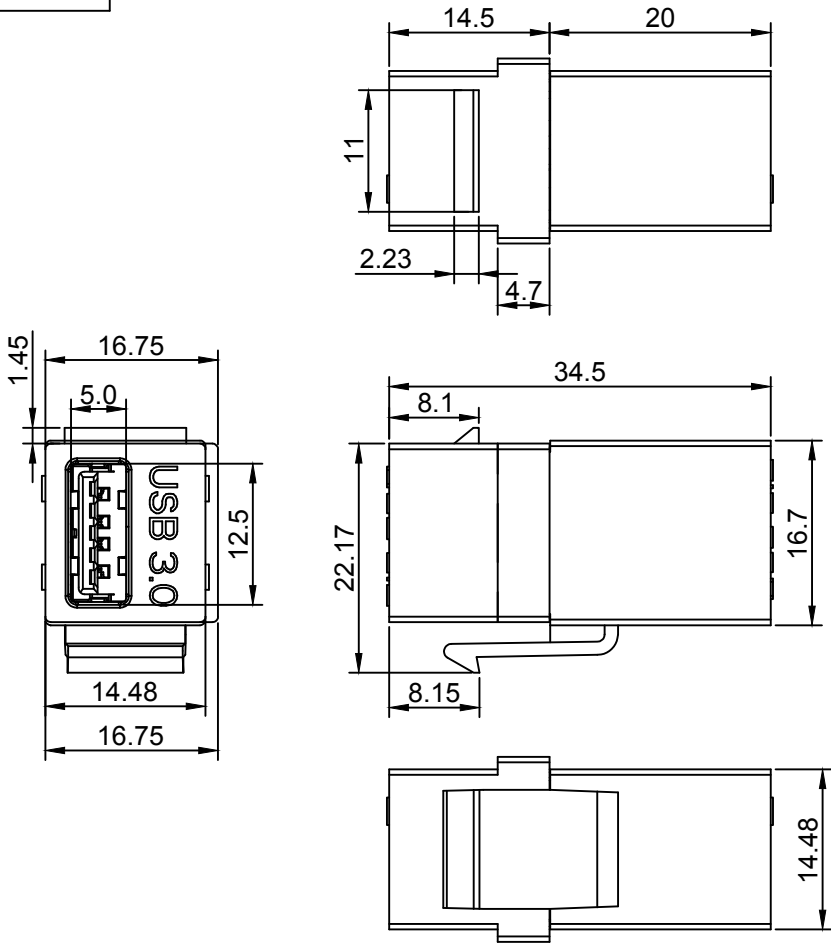

PIN OUT

P1	P12
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9

SHELL ————— SHELL

NOTE:
1.Electronic test
1.1 open/short 100% test
2.Max. support of power :5V/900mA
Data transfer rate: 5Gbps Max.
3.RoHS2.0(2011/65/EU) AND (2015/863/EU) WITH REACH COMPLIANT

②	OUTER MOLD	ABS ,BLACK	1	
①	USB A FEMALE	USB3.0 A FEMALE,GOLD PLATED PIN, NICKEL PLATED SHELL.	2	
NO.	PART NAME	DESCRIPTION	QUANTITY	REMARKS

NAME	VALUE USB3.0 Keystone, A-A,F/F		
ITEM NO.	25.99.8207		
MAPE		TOLERANCE	
		X. ±1.00	
DRAW BY		SCALE	MM
		PAGE	1/1

SECOMP