


CSM-Q87M-E43 (MS-7830v2.1) m-ATX Motherboard

Support 4th Generation Intel® Core™ i7 / Core™ i5 / Core™ i3 / Pentium® / Celeron® Processor for LGA 1150 socket

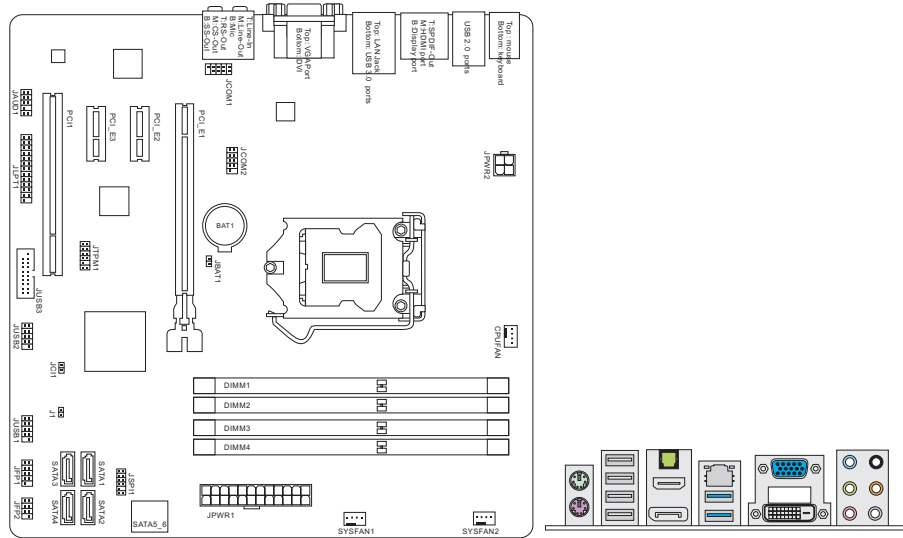

Motherboard Specification

Processor Support Support 4th Generation Intel® Core™ i7 / Core™ i5 / Core™ i3 / Pentium® / Celeron® Processor for LGA 1150 socket	On-Board 2 USB 2.0 connectors 1 USB 3.0 connector 1 Front Panel Audio connector 1 TPM Module connector (option) 1 TPM chip on board (option) 2 Serial connectors 1 Chassis Intrusion connector 1 Parallel port connector
Base Clock 100/125/167 MHz	Slots 1 x PCI Express 3.0 x16 slot 2 x PCI Express 2.0 x 1 slots 1 PCI slot, support 3.3V/ 5V PCI bus Interface
Chipset Intel® Q87 chipset	Form Factor m-ATX (243.84 X 243.84 mm)
Memory Support 4 DIMMs support for DDR3-1066/1333/1600 MHz up to 32GB max - Supports Dual-Channel mode	Feature on Focus - Military Class 4 - OC Genie 4 - Click BIOS 4 - All Solid CAPs - PCI Express Gen 3 - Intel® vPro™ Technology - Small Business Advantage - Super RAID - USB 3.0 - SATA 6Gb/s - HDMI
LAN Supports Gb LAN 10/100/1000 Fast Ethernet by Intel® i217LM	Mounting 8 mounting holes
Audio - Chip integrated by Realtek® ALC887 - Flexible 8-channel audio with jack sensing - Compliant with Azalia 1.0 Spec	
SATA 6 SATA 6Gb/s (SATA1~6) ports by Intel® Q87	
USB 3.0 4 USB 3.0 ports by Intel® Q87 (rear x 2, front x 2)	
Connectors - Back panel 1 PS/2 mouse port 1 PS/2 keyboard port 4 USB 2.0 ports 2 USB 3.0 ports 1 Optical S/PDIF OUT 1 HDMI port 1 Displayport 1 VGA port 1 DVI port 1 LAN port 6 flexible audio ports	

These specification is subject to change without prior notice.