


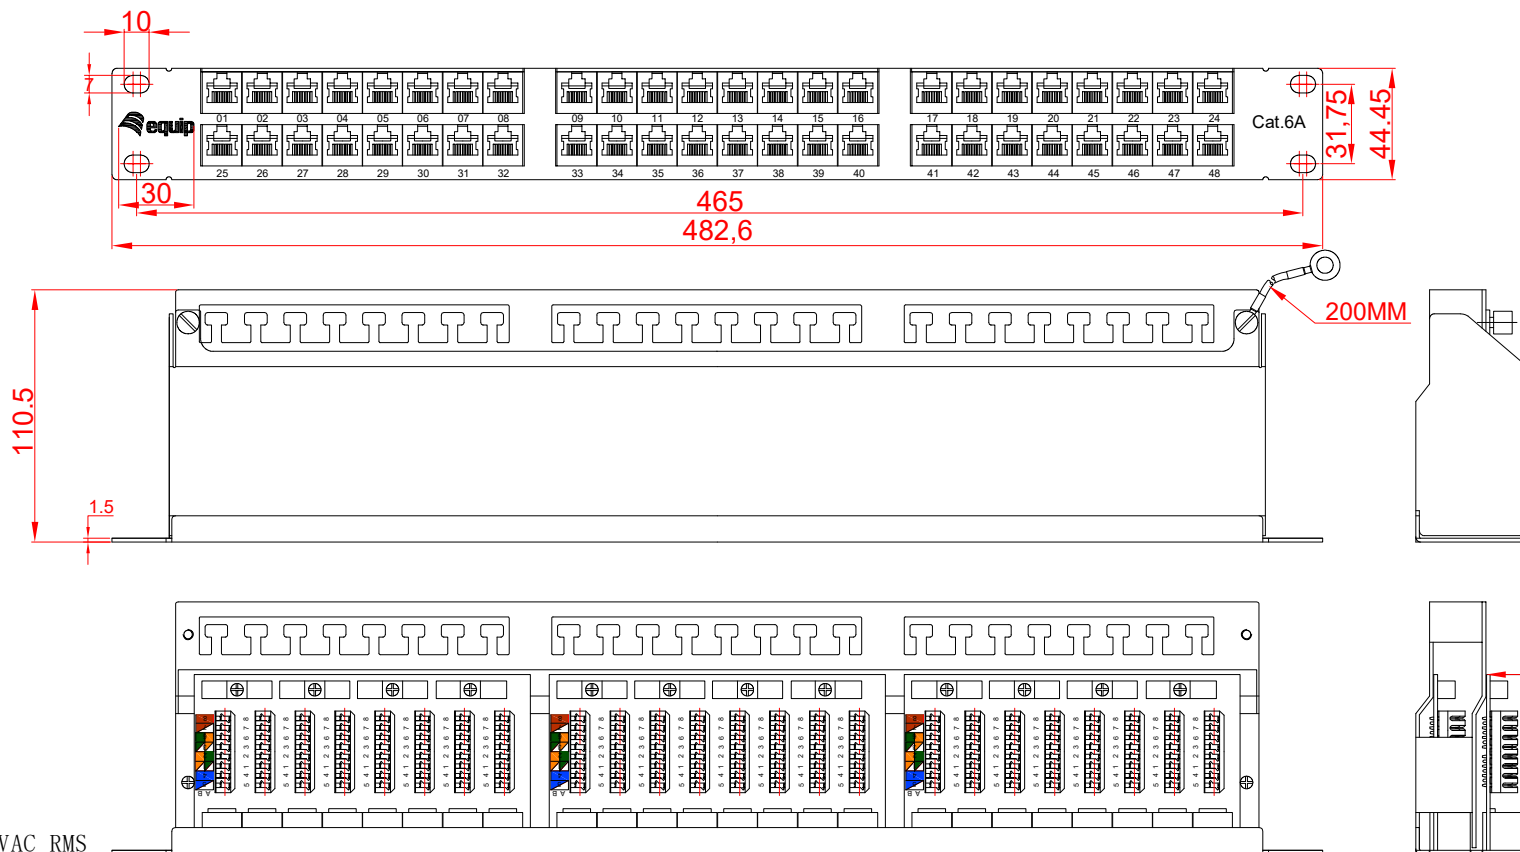

NOTES:

ELECTRICAL:

1. VOLTAGE RATING:125 VAC RMS
2. CURRENT RATING:1.5AMP
3. CONTACT RESISTANCE:100MILLIOHMS MAX
4. INSULATION RESISTANCE:1000 MEGOHMS MIN @500 VDC
5. DIELECTRIC STRENGTH:750 VAC RMS 60Hz, 1MIN

ENVIRONMENTAL:

1. STORAGE:-40° TO +85°
2. OPERATION:0° TO 70°

MECHANICAL:

1. HOUSING MATERIAL:PBT;
2. PANEL FRAME:CARBON STEEL, POWDER, COATING IN BLACK COLOR, Spec1.5mm;
3. PCB MATERIAL:FR-4 T=1.6mm ;
4. IDC MATERIAL:PC , CONTACT:PHOSPHOR BRONZE; WITH NICKEL PATING ;
5. RJ45 JACK LIFE:750 TIMES MIN;
6. IDC LIFE:200 TIMES MIN;
7. WIRE:AWG 22-26;

SYM	Number	Bill No. of Alteration	Signature	Date
Drawn	Ding jian bo	2016.1.14	Tolerance	
Checked	Ge pei jun	2016.1.14	0.00-20.00 20.00-50.00 50.00-100.00 100.00- Angle	±0.10 ±0.15 ±0.20 ±0.25 ±30'
Approved	Wang wei jun	2016.1.14		



Material					Item No.	326626	
Angles Projection		Size	Scale	Unit	Part Name	48Ports Cat6A STP Patch Panel	
		A4	X:1	mm	ERP		
Sheet		1 OF 1	Version: A/0		Part No.		