



Key switch breaking circuit, 1-pole

Functions at a glance

- For profile semi-cylindrical lock.
- In switched-on and switched-off status the key can be pulled out in the central position, respectively.
- With labelling field.
- Labelling field 57.8 x 9.8 mm
- IP 44 only in combination with appropriate cylindrical locks.
- Rated voltage: 250 V~
- Rated current: 10 AX
- Protection class (device): IP 44
- See semi-cylindrical lock.
- For compatible lettering software, visit www.BUSCH-JAEGER-labelingtool.com.
- Labelling strip non-illuminable.

Order details

Article No.:	2733 SLW-53
Order No.:	2CKA001101A0917
EAN:	4011395992708
Customs tariff number:	85365080
Preisgruppe:	19
Preis:	99,00 EUR plus VAT
Info sheet:	» Download PDF

Downloads

Instruction manual

» [DE](#)


Certificates

» [EU-declaration of conformity](#)


Films on application

- » [Application film on assembling the key switch.](#)
- » [Application film on assembling the key switch.](#)


Dimensions

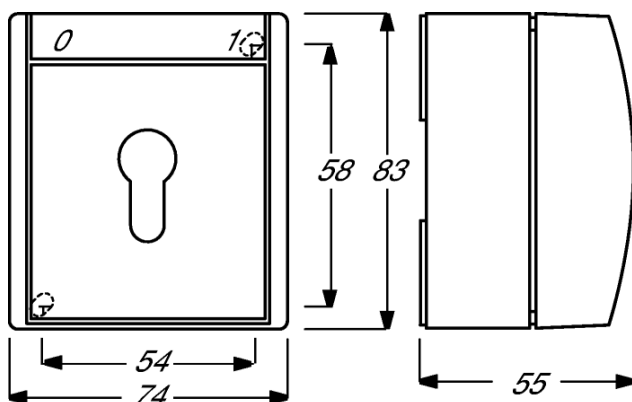

Wiring diagram

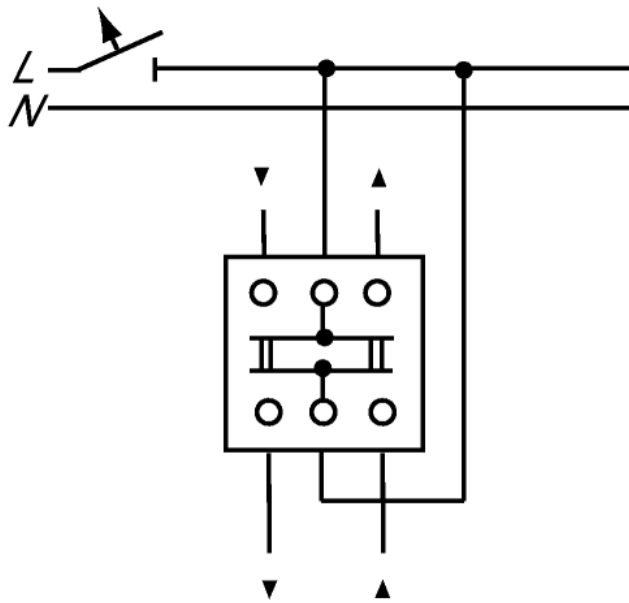

Blind switch-push switch, 1 P+N+PE, rotary switch or key 2713-.. and 2733-..

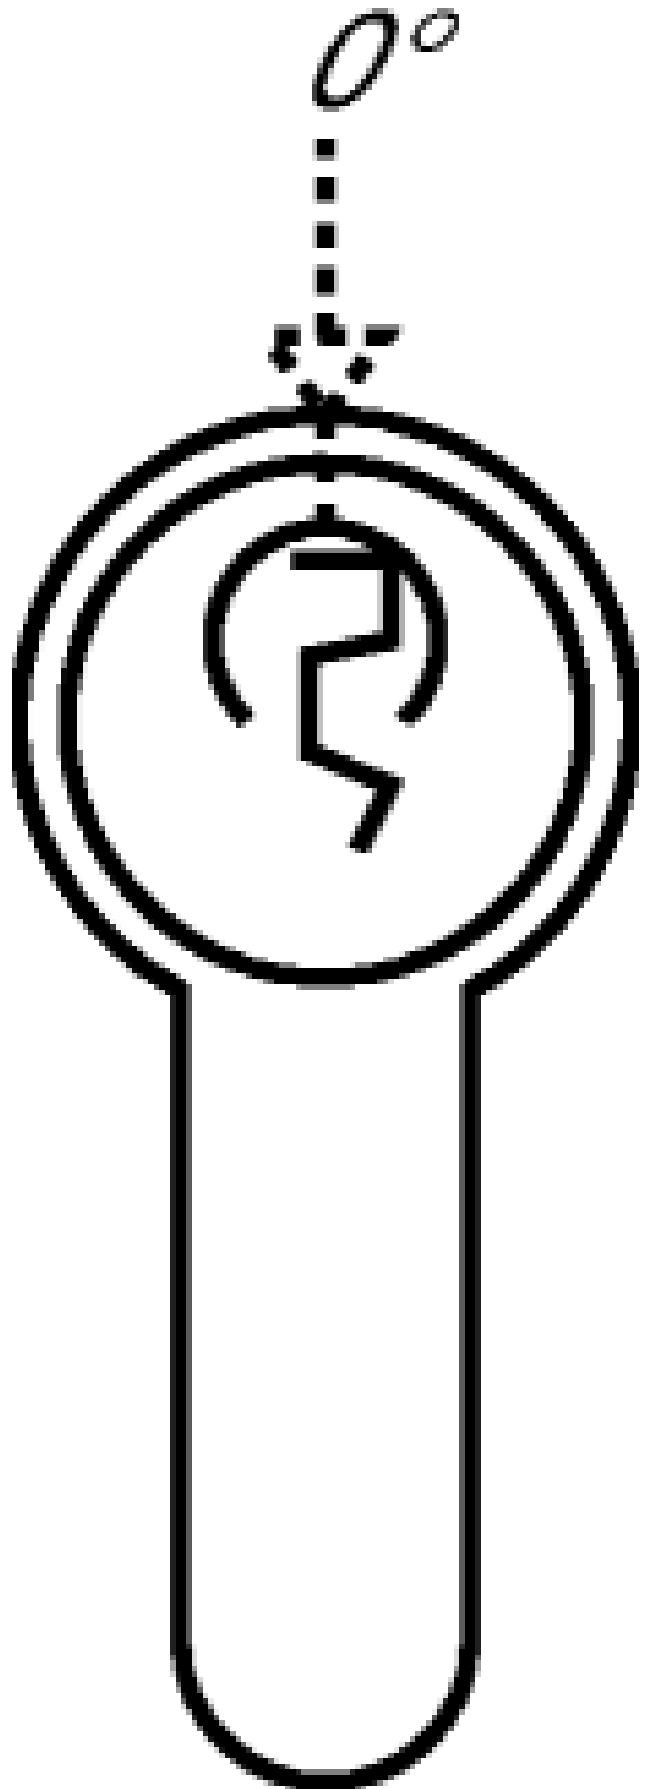

Possible lock bit position of the DIN profile semi-cylinder lock for 1-pole on-off switches