Datenblatt - Fiche technique - Data sheet


21.15.2882



ROLINE Patchkabel Kat.6A S/FTP (PiMF), Comp. Level, LSOH, braun, 2,0 m

Cordon ROLINE S/FTP(PiMF) Cat.6A / 10 Gigabit, LSOH, Component Level, brun, 2,0 m

ROLINE S/FTP Patch Cord Cat.6A, Component Level, LSOH, brown, 2.0 m

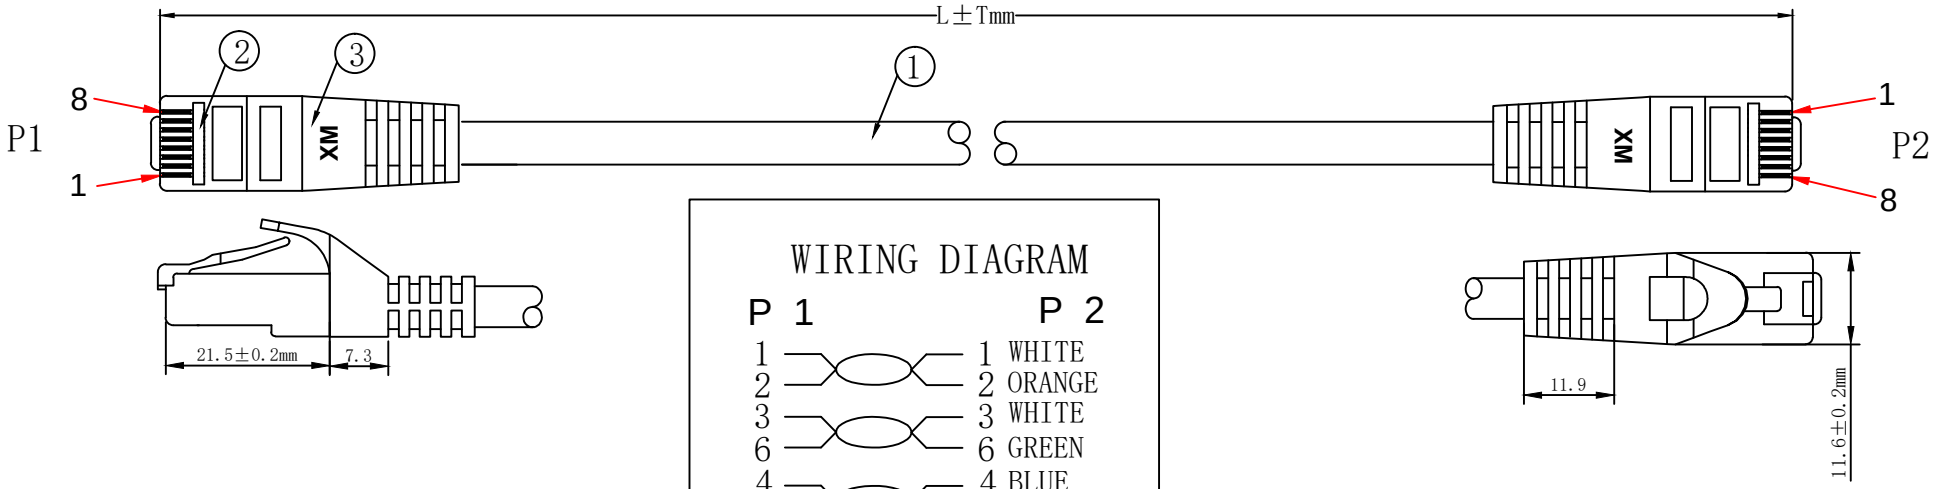

WIRING DIAGRAM

P 1		P 2
1		1 WHITE
2		2 ORANGE
3		3 WHITE
6		6 GREEN
4		4 BLUE
5		5 WHITE
7		7 WHITE
8		8 BROWN
SH		SH

1. ELECTRICAL TEST:
 (1). 100% OPEN SHORT & MISS WIRE TEST;
 (2). INSULATION RESISTANCE:DC 250V 20M OHM MIN;
 (3). CONTACTOR RESISTANCE:30 OHM MAX
2. PRINTING:GHMT® roline CAT.6A S/FTP COMPONENT PATCH CORD LSZH 500MHz ISO/IEC 11801 & EN 50173-1 & ANSI/TIA-568-C.2
3. 100% Component Patch cord Test PASS
4. Minimum bending radius:60mm

MATERIAL LIST

NO.	PARTS NAME	SPECIFICATION STANDARD	QT'Y	REMARK
⑥	LABEL	NO DRY GLUE LABEL	1PCS	
⑤	MINI TIE	PE MINI TIE(POSSESS METAL)	2PCS	
④	POLYETHYLENE BAG	POLYETHYLENE BAG	1PCS	
③	OVER MOLD	88A PVC Brown	2PCS	
②	CONNECTOR	RJ45 8P8C'S SHIELDED PIN GOLD PLATED 3u", SHELL PLATED NICKEL Transparent Blue	2PCS	
①	CABLE	S/FTP CAT.6A 26AWG (BC*1P+AL-FOIL)*4P+BRAID CABLE JACKET LSOH OD=6.2±0.2MM	1PCS	

BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		NEW	2016-09-13	A

COLOUR:Brown (PANTONE:463C)

ITEM NO.	LENGTH(L)	TOLERANCE(T)
21.15.2978	300mm	±10mm
21.15.2880	500mm	±15mm
21.15.2881	1000mm	±30mm
21.15.2884	1500mm	±45mm
21.15.2882	2000mm	±60mm
21.15.2883	3000mm	±90mm
21.15.2885	5000mm	±150mm
21.15.2886	7500mm	±210mm
21.15.2887	10000mm	±300mm
21.15.2888	15000mm	±450mm
21.15.2889	20000mm	±600mm

ITEM NO.	21.15.2978	21.15.2880	21.15.2881	21.15.2882	21.15.2883
21.15.2884	21.15.2885	21.15.2886	21.15.2887	21.15.2888	21.15.2889
DESC.	ROLINE S/FTP PatchCord CAT.6A, LSOH, Comp.Level, Brown				

SECOMP