


|                   |       |
|-------------------|-------|
| 0.0 mm~6.0 mm     | ±0.08 |
| 6.0 mm~20.0 mm    | ±0.11 |
| 20.0 mm~50.0 mm   | ±0.15 |
| 50.0 mm~100.0 mm  | ±0.20 |
| 100.0 mm~250.0 mm | ±0.30 |
| 250.0 mm~400.0 mm | ±0.40 |
| 400.0 mm~600.0 mm | ±0.50 |



### Technical Requirements:

1. 12-way German-type output + 1P circuit breaker (normal plastic shell)
2. Module assemble sequence: mark panel + 1P circuit breaker (normal plastic shell) + 12-way German-type socket
3. 1.5U Rackmount size for standard 19" cabinets & racks
4. Aluminum alloy shell
5. Cable specification: 3G2.5mm; 1.6 meter cable
6. Bracket installation style: rear
7. Relative humidity: 10 - 90%
8. Socket/outlet standard: IEC60884
9. Rated Voltage: 250 V AC
10. Rated Current: 16 A

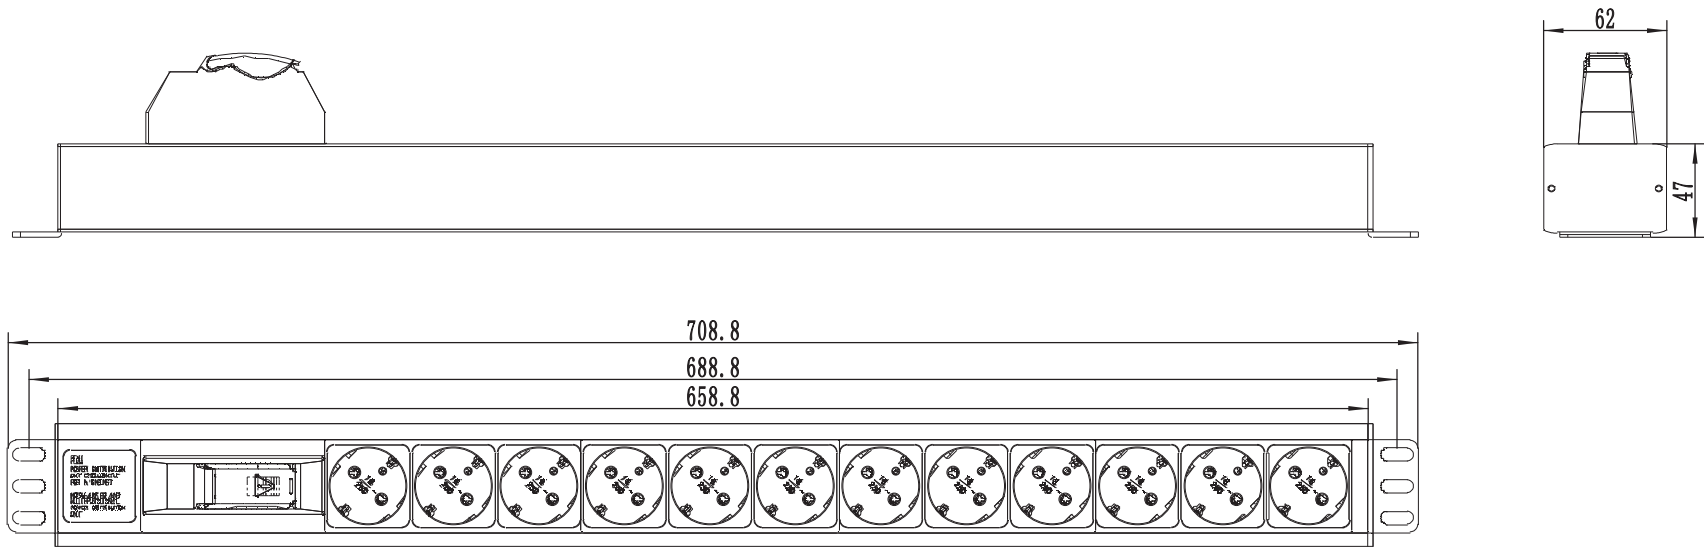

[intellinetnetwork.com](http://intellinetnetwork.com)