



Busch-Watchdog 180 flush-mounted comfort sensor II with multi-lens

Functions at a glance

- For ABB i-bus® KNX 6120/12-101, 6120/13.
- Movement detector with up to 4 channels.
- Incl. 10 logic channels (light scene actuator, sequence actuator, logic gates, etc.).
- Control element: Sliding switch for manual operation ON/AUTOMATIC/OFF (lockable)
- Protection class (device): IP 20
- Temperature range (device): -5 °C - 45 °C
- Storage temperature range: -25 °C - 55 °C
- Transport temperature range: -25 °C - 70 °C
- Detection range: frontal: 15 m, lateral: 5 m
- Detection range 2: frontal: 10 m, lateral: 2.5 m
- Brightness limit value: 5 Lux - Up to daytime operation
- Detection angle: 180 °
- Dimensions: (L x W x D): 63 mm x 63 mm x 28 mm
- Position for installation: vertical
- Mounting height: 0.8 m - 1.2 m, alternatively: 2.5 m
- For software and description please check the current Online-Catalogue.
- For compatible cover frames, see the following ranges: carat®, pure stainless steel, solo®, Busch-axcent® or future® linear.
- Surface painted.

Order details

Article No.:	6122/02-866
Order No.:	2CKA006132A0267
EAN:	4011395135266
Customs tariff number:	85389099
Price group:	42
Price:	130,00 EUR plus VAT

Downloads

Instruction manual

- » [Installation and operating instructions](#)
- » [Product manual](#)


Certificates

- » [EU-declaration of conformity](#)
- » [ROHS product declaration](#)

Software

- » [Additional software :PowerTool , V 1.2.125, 22.10.2021](#)
- » [ETS application for Power-Tool , V 1.0, 11.07.2011](#)
- » [ETS application for Power-Tool , V 3.0, 06.08.2012](#)

Dimensions

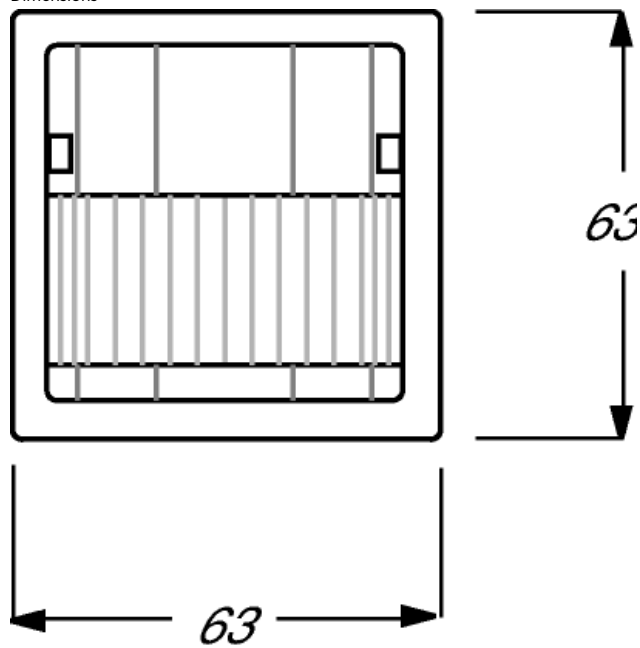

Wiring diagram

