



FRITZ!Box 4060

Manual

Table of Contents

General Information on the FRITZ!Box.....	7
Safety Instructions.....	8
Package Contents.....	11
Instructions and Help.....	12
Symbols Used.....	13
Information on Cleaning.....	14
Functions and Structure.....	15
Functions.....	16
Device Data on the Type Label.....	19
Connection Sockets.....	21
Buttons.....	22
LEDs.....	23
Requirements for Operation.....	26
Connecting.....	27
Overview: Connecting the FRITZ!Box.....	28
Placement.....	29
Connecting to Electric Power.....	31
Connecting with the Internet: Via Modem or Router.....	32
Connecting to the Internet Access: Via a DSL/VDSL Modem.....	33
Connecting to the Internet Access: Via a Cable Modem.....	34
Connecting to the Internet Access: Via a Fiber Optic Modem.....	36
Connecting to the Internet Access: Via a Router.....	38
Connecting to the Internet Access: Via Mobile Network.....	40
Connecting a Computer Using a Network Cable.....	42
Connecting to Computers via Wi-Fi.....	44
Connecting Telephones.....	47
Connecting Smartphones.....	49
User Interface.....	51

Opening the User Interface.....	52
Homepage of the User Interface.....	53
Using the Wizard for Basic Configuration.....	55
Changing the FRITZ!Box Password.....	57
Logging Out of the User Interface.....	59
Configuring.....	60
Overview: Configuring FRITZ!Box.....	61
Configuring Internet Access via DSL Modem.....	62
Configuring Internet Access via Cable Modem.....	63
Configuring Internet Access via Fiber Optic Modem.....	64
Configuring Internet Access via Another Router.....	66
Configuring Internet Access via Another Router: IP Client.....	68
Configuring Internet Access via a Wireless Device.....	69
Configuring Internet Access via Mobile Network.....	71
Configuring Telephones.....	72
Saving Power with the FRITZ!Box.....	74
Mesh with FRITZ!.....	76
Expanding a Wi-Fi Network with Mesh.....	77
Enabling Mesh for FRITZ!Repeater and FRITZ!Powerline.....	79
Using FRITZ!Box as a Mesh Repeater.....	81
Using Telephony in the Mesh.....	82
User Interface: Internet Menu.....	83
Using AVM Services for Diagnostics and Maintenance.....	84
Configuring Parental Controls.....	86
Creating and Assigning Access Profiles.....	89
Editing Filter Lists.....	91
Configuring Priorities for Internet Use.....	93
Configuring Port Sharing.....	94
Enabling Dynamic DNS.....	96
Remote Access to the FRITZ!Box.....	97
Configuring VPN Remote Access.....	99

Configuring IPv6.....	101
Configuring FRITZ!Box as a LISP Router.....	103
User Interface: Telephony Menu.....	104
Configuring and Using the Telephone Book.....	105
Configuring and Using the Answering Machine.....	108
Configuring Call Diversion.....	110
Configuring Call Blocks.....	111
Configuring Do Not Disturb.....	113
Setting an Alarm.....	114
Configuring a Dialing Rule.....	115
Reducing the Radiation of DECT Emissions.....	116
Allowing Non-Encrypted DECT Connections.....	118
User Interface: Home Network Menu.....	119
Overview of All Devices.....	120
Managing Network Devices.....	125
Changing IPv4 Settings.....	128
Distributing IPv4 Addresses.....	131
Changing IPv6 Settings.....	133
Configuring a Static IP Route.....	135
Obtaining an IP Address Automatically.....	137
Configuring the “WAN” Connection Socket.....	139
Configuring Wake on LAN.....	141
Configuring USB Devices.....	142
Configuring and Using the Media Server.....	148
Assigning a FRITZ!Box Name.....	150
User Interface: Wi-Fi Menu.....	151
Switching the Wi-Fi Network On and Off.....	152
Selecting the Wi-Fi Channel.....	153
Configuring Wi-Fi Guest Access.....	154
User Interface: Smart Home Menu.....	158
Smart Home Devices.....	159

Configuring a Group of Switchable Sockets and LED Lights.....	161
Setting Up a Group of Radiator Controls.....	162
Configuring a Template for Switchable Sockets and LED Lights.....	163
Configuring a Template for Radiator Controls.....	164
User Interface: Diagnostics Menu.....	165
Starting Function Diagnostics.....	166
Starting Security Diagnostics.....	168
User Interface: System Menu.....	171
Configuring Push Services.....	172
Logging In with the User Interface as a FRITZ!Box User.....	174
Selecting Signaling of the “Info” LED.....	178
Locking and Unlocking Buttons.....	179
Setting the User Interface Language.....	180
Changing Regional Options.....	181
Adjusting the Time Zone.....	182
Saving Settings.....	183
Loading Settings.....	184
Restarting the FRITZ!Box.....	185
Restoring Factory Settings.....	186
Performing a FRITZ!OS/FRITZ!OS Update Automatically.....	188
Performing a FRITZ!OS Update in the Mesh Overview.....	191
Performing a FRITZ!OS Update with the Wizard.....	193
Performing a FRITZ!OS Update Manually.....	195
User Interface: Wizards Menu.....	197
Using the Wizards.....	198
FRITZ!NAS.....	200
Using Features of FRITZ!NAS.....	201
Expanding FRITZ!Box Storage.....	203
Displaying FRITZ!Box Storage in a File Manager.....	204
Saving FRITZ!Box Storage.....	205
MyFRITZ!.....	206

What Is MyFRITZ!?	207
Creating a New MyFRITZ! Account	210
Configuring MyFRITZ!App in Android	211
Configuring MyFRITZ!App in iOS	212
Controlling FRITZ!Box with Keypad Codes	213
Information on Keypad Codes	214
Configuration on the Telephone	216
Operating on the Telephone	221
Restoring Factory Settings with the Telephone	234
Malfunctions	236
Troubleshooting Procedures	237
Troubleshooting Chart	238
Opening the User Interface with the Emergency IP Address	241
Knowledge Base	242
Support	243
Decommissioning and Disposal	244
Decommissioning	245
Disposal	246
Technical Specifications	247
Technical Specifications	248
Legal	252
Legal Notice	253
Index	258

General Information on the FRITZ!Box

Safety Instructions.....	8
Package Contents.....	11
Instructions and Help.....	12
Symbols Used.....	13
Information on Cleaning.....	14

Safety Instructions

Overview

Before connecting the FRITZ!Box, observe the following security instructions in order to protect yourself, the surroundings, and the FRITZ!Box from harm.

Fires and Electrical Shocks

Overloaded outlets, extension cords and power strips can cause fires or electric shocks.

- Avoid using socket strips and extension cords if at all possible.
- Do not connect multiple extension cords or socket strips to each other.

Overheating

Heat accumulation can cause the FRITZ!Box to overheat. This can result in damage to the FRITZ!Box.

- Provide for sufficient air circulation around the FRITZ!Box.
- Make sure that the ventilation slits on the FRITZ!Box housing are always unobstructed.
- The FRITZ!Box should not be placed on carpets or upholstery.
- Do not cover the FRITZ!Box.

Power Surges Caused by Lightning

During electrical storms, electrical surges caused by lightning present a danger to connected electrical devices.

- Do not install the FRITZ!Box during an electrical storm.
- During a storm, disconnect the FRITZ!Box from the power supply.

Moisture, Liquids, and Vapors

Moisture, liquids, and vapors that find their way into the FRITZ!Box can cause electric shocks or short circuits.

- Only use the FRITZ!Box indoors.
- Never let liquids get inside the FRITZ!Box.
- Protect the FRITZ!Box from vapors and moisture.

Improper Cleaning

Improper cleaning with strong detergents, solvents or wet cloths can cause damage to the FRITZ!Box.

- Please refer to the information about how to clean your FRITZ!Box; [see page 14](#).

Improper Opening and Repairs

The device contains hazardous components and should only be opened by authorized repair technicians.

- Do not open the FRITZ!Box housing.
- If the FRITZ!Box needs to be repaired, please take it to a specialized vendor.

Internet Security

Comprehensive information about how to protect your FRITZ!Box and your home network from access by strangers is presented in the internet at:

en.avm.de/guide

Radio and Electromagnetic Interference

Radio interference can be generated by every device that emits electromagnetic signals. With so many devices transmitting and receiving radio waves, interference can occur when radio waves overlap.

- Do not use the FRITZ!Box in places where the use of radio devices is prohibited.

- Follow any instructions to switch off radio devices – especially in hospitals, outpatient treatment centers, medical practices, and other medical facilities – in order to prevent interference with sensitive medical equipment.
- Consult your doctor and the manufacturer of your medical device (pacemaker, hearing aid, electronically controlled implant, etc.) to find out whether it could be affected by interference from your FRITZ!Box.
- If applicable, maintain the recommended minimum distance of 15 cm recommended by the manufacturers of medical devices in order to prevent malfunctions of your medical device.

Potentially Explosive Environments

Under unfavorable conditions, radio waves in the vicinity of explosive environments can cause fires or explosions.

- Do not install and operate your FRITZ!Box in the vicinity of explosive environments, flammable gases, areas in which the air contains chemicals or particles like grain, dust or metal powder, or in the vicinity of detonation grounds.
- In locations with potentially explosive atmospheres, and in the vicinity of detonation grounds, follow the instructions to switch off electronic devices in order to prevent interference with detonation and ignition systems.

Package Contents

Package Contents

Amt.	Supplied Part	Details
1	FRITZ!Box 4060	
1	Power adapter	White
1	Network cable	Also LAN cable, white
1	Quick guide	Instructions for connecting the FRITZ!Box

Instructions and Help

Instructions and Help

Use the comprehensive customer documentation to connect, configure, and operate your FRITZ!Box.

The latest information on products, important developments, and updates is presented on social media.





After a FRITZ!OS update, download the latest manual from en.avm.de/service/manuals.

Medium	Contents	Location
Manual	<ul style="list-style-type: none"> • Status FRITZ!OS version 07.28 • Connecting, configuration, and operation • Range of functions of your FRITZ!Box 	en.avm.de/service/manuals
Quick guide	Connecting and configuration	Provided in print with your FRITZ!Box
Online help	<ul style="list-style-type: none"> • Instructions on configuration and operation • Help on the functions and settings options in the user interface 	http://fritz.box
Knowledge Base	Solutions for common problems during connection, configuration, and operation	en.avm.de/service
Social media	The latest about the FRITZ!Box, your FRITZ!Box home network, and your FRITZ! device	Facebook
		Instagram
		Twitter
		YouTube

Symbols Used

Symbols Used

The following symbols are used in this manual:

	Meaning
	Important message that should be complied with in order to prevent material damage, errors or malfunctions
	Useful tip for configuring and operating the FRITZ!Box

Information on Cleaning

Rules

Keep the following rules in mind for cleaning your FRITZ!Box:

- Remove the FRITZ!Box from the mains before cleaning.
- Wipe the FRITZ!Box with a slightly moist, lint-free cloth or an anti-static cloth.
- Do not use any strong detergents or solvents for cleaning.
- Do not use any wet cloths for cleaning.

Functions and Structure

Functions.....	16
Device Data on the Type Label.....	19
Connection Sockets.....	21
Buttons.....	22
LEDs.....	23
Requirements for Operation.....	26

Functions

Internet Router

The FRITZ!Box 4060 is a router which is connected to an internet access device. The FRITZ!Box 4060 can be used on the following internet access devices:

- DSL or VDSL modem
- Cable modem
- Fiber optic modem
- Router
- USB mobile broadband dongle

Telephone System

The following devices can be connected to the FRITZ!Box:

- 6 cordless (DECT) telephones
- 10 IP telephones (FRITZ!App Fon, for instance)

Up to five integrated answering machines can be used to save voice messages and, upon request, send them to you by email.

Wireless Access Point

The FRITZ!Box is a wireless access point for any wireless devices, for instance:

- Notebooks
- Tablets
- Smartphones
- Wireless printers

Hub in the Home Network

The FRITZ!Box is the hub in the home network. All of the devices connected with the FRITZ!Box make up the home network. With the FRITZ!Box you can keep track of all devices. The functions available for the home network include:

- A media server for transmission of music, pictures, and video to playback device in the home network
- MyFRITZ!, for access to your own FRITZ!Box over the internet from anywhere
- FRITZ!NAS, for easy access to all files in the network

USB Port

The FRITZ!Box has a USB 3.0 port to which you can connect the following devices:

- USB storage devices (for example, flash drives, external hard drives, card readers)
- USB printers, USB all-in-one printers, USB scanners
- USB mobile network dongles or smartphones with USB tethering
- USB hubs

DECT Base Station

The FRITZ!Box is a DECT base station that supports the DECT ULE standard. The following DECT devices can be operated simultaneously on the FRITZ!Box:

- Up to 6 cordless (DECT) telephones
- Smart Home devices

Smart Home

The following Smart Home devices can be registered with the FRITZ!Box at the same time, and configured and controlled via the FRITZ!Box:


Type of Device	Number	Features
Smart plugs <ul style="list-style-type: none"> • FRITZ!DECT 210 • FRITZ!DECT 200 	Up to 10	<ul style="list-style-type: none"> • Control the power supply to connected devices. • Measure the power consumption of connected devices.
Radiator controls <ul style="list-style-type: none"> • FRITZ!DECT 301 • FRITZ!DECT 300 • Comet DECT 	Up to 12	Control the room temperature automatically and save energy costs.
Switches <ul style="list-style-type: none"> • FRITZ!DECT 440 • FRITZ!DECT 400 	Up to 10	Switch and control FRITZ!DECT devices.
FRITZ!DECT 500 LED light	Up to 10	Control white and color lighting.
Smart Home devices via HAN FUN	Up to 10	Connect Smart Home devices from other manufacturers with the FRITZ!Box.

Device Data on the Type Label

Overview


Important device data on your FRITZ!Box are presented on the type label on the bottom. There you find the preset network key for Wi-Fi connections with the FRITZ!Box, the preconfigured FRITZ!Box password for the user interface, the serial number for support queries, and additional data.

Device Data on the Type Label

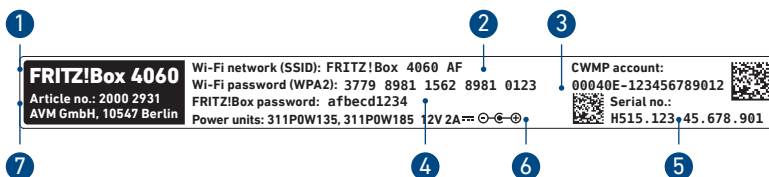

No.	Meaning
1	Product name
2	Name of Wi-Fi network (SSID)
3	Network key (Wi-Fi password)
4	Password of user interface
5	Serial number
6	Power adapter specification
7	Article number


QR Code to Access Wi-Fi

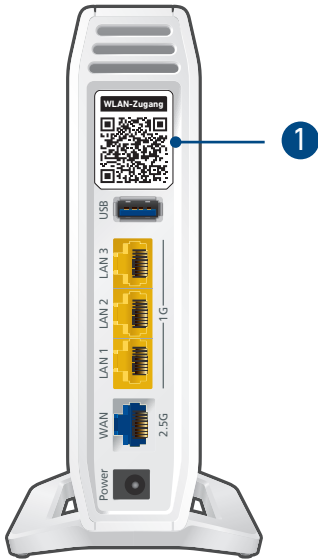

No.	Name	Meaning/Function
1	Access to Wi-Fi	QR code for Wi-Fi access with the preconfigured Wi-Fi access information

Connection Sockets

Connector Panel

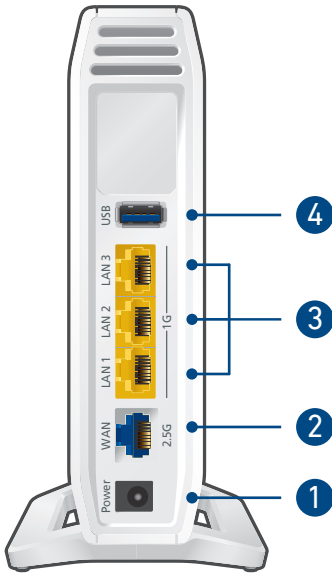

No.	Name	Function
1	Power	Socket for plugging in the power supply
2	WAN	RJ45 socket for connecting to a modem or a router for internet access
3	LAN 1 - LAN 3	Port for connecting computers and other network devices like game consoles and network hubs
4	USB	USB 3.0 sockets for connecting USB devices like printers or storage media

Buttons


Button Functions



No.	Button	Function
1	Connect	<ul style="list-style-type: none"> Register wireless devices with the FRITZ!Box via WPS; see page 45 Enabling Mesh for FRITZ!Repeaters and FRITZ!Powerline; see page 79 Register cordless telephones with the FRITZ!Box; see page 47 Register Smart Home devices with the FRITZ!Box

LEDs

Meaning of the LEDs

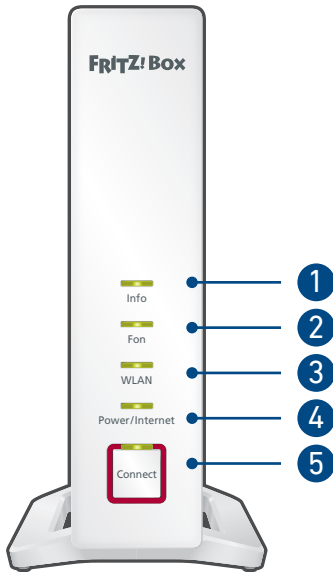

No.	LED	Condition	Meaning
1	Info	on	<ul style="list-style-type: none"> • AVM Stick & Surf procedure with the FRITZ!WLAN Stick concluded. • Adjustable, see page 178
		flashing	<ul style="list-style-type: none"> • Updating FRITZ!OS. • AVM Stick & Surf procedure with the FRITZ!WLAN Stick in progress. • Time budget for online time has been reached. • Adjustable, see page 178
		red or flashing red	<p>Error:</p> <ol style="list-style-type: none"> 1. Open the user interface; see page 52. 2. Follow the instructions on the “Overview” page in the user interface.
2	Fon	on	A telephone call is being conducted.
		flashing	<p>Messages in your voice mailbox.</p> <p>(Function must be supported by the telephony provider.)</p>
3	WLAN	on	Wi-Fi is enabled.
		flashing	<ul style="list-style-type: none"> • Switching Wi-Fi on or off. • Applying changes to the Wi-Fi settings.
4	Power Internet	on	Device has electric power and the internet connection has been established.
		flashing	Power supply is connected and the internet connection is being established or has been interrupted.

No.	LED	Condition	Meaning
5	Connect	flashing	Registration in progress for a wireless, DECT, Smart Home or powerline device.
		flashing fast	Registration aborted: more than 1 device registering with the FRITZ!Box. Repeat the registration: 1 device per registration.

Requirements for Operation

Requirements

- For internet access via a DSL modem: DSL line with DSL modem
- For internet access via a cable modem: cable connection with cable modem
- For internet access via a fiber optic modem: fiber optic connection with fiber optic modem
- For internet access via router: existing router with internet connection
- For internet access via mobile network: USB modem with mobile network connection
- For configuration of the FRITZ!Box: a network device (computer or tablet) with network connection or Wi-Fi support and up-to-date web browser

For comprehensive technical information about your FRITZ!Box, [see page 247](#).






Connecting

Overview: Connecting the FRITZ!Box.....	28
Placement.....	29
Connecting to Electric Power.....	31
Connecting with the Internet: Via Modem or Router.....	32
Connecting to the Internet Access: Via a DSL/VDSL Modem.....	33
Connecting to the Internet Access: Via a Cable Modem.....	34
Connecting to the Internet Access: Via a Fiber Optic Modem.....	36
Connecting to the Internet Access: Via a Router.....	38
Connecting to the Internet Access: Via Mobile Network.....	40
Connecting a Computer Using a Network Cable.....	42
Connecting to Computers via Wi-Fi.....	44
Connecting Telephones.....	47
Connecting Smartphones.....	49

Overview: Connecting the FRITZ!Box

Overview

Connecting the FRITZ!Box entails the following steps:

	Instructions
	Place the FRITZ!Box in a suitable location.
	Connect the FRITZ!Box to the power supply.
	Connect the FRITZ!Box to your internet connection.
	Connect your computers and network devices to the FRITZ!Box.
	Connect your telephones to the FRITZ!Box.

Placement

Rules for Setting Up the FRITZ!Box

- Only use the FRITZ!Box indoors.
- Position the FRITZ!Box near an electrical outlet that is easy to reach, so that you can unplug the FRITZ!Box at any time.
- Position the FRITZ!Box in a dry location that is free of dust.
- Do not place the FRITZ!Box on heat-sensitive surfaces like furniture with sensitive paintwork.
- To avoid heat accumulation, the FRITZ!Box should not be placed on carpets or upholstered furniture.
- Provide for sufficient air circulation around the FRITZ!Box and do not cover up the FRITZ!Box. The ventilation slits must never be obstructed.

Rules for Optimum Wi-Fi Reception

Radio wave propagation during Wi-Fi operation is strongly dependent on the position of your FRITZ!Box. Keep the following rules in mind for good reception:

- Position the FRITZ!Box in a central location.
- Position the FRITZ!Box in an elevated location.
- Keep sufficient distance from potential sources of interference like DECT base stations, microwave devices or electric devices with large metal housings.
- Position the FRITZ!Box so that it is not covered by other objects and there are as few walls or other obstacles as possible between it and the other wireless devices.
- Make sure that the FRITZ!Box uses frequency ranges that are used by as few other devices as possible.



By slightly shifting the position of the FRITZ!Box you can improve the Wi-Fi connection. If these measures are not sufficient, then you can extend the range of your Wi-Fi network with a wireless repeater and Mesh with FRITZ!; [see page 77](#).

Instructions: Setting Up the FRITZ!Box

1. In compliance with the rules mentioned above, select a suitable location for the FRITZ!Box.
2. Place the FRITZ!Box in this location.

Connecting to Electric Power

Overview


Connect the FRITZ!Box to the power supply.

Rules

- If possible, avoid using any power strips or extension cords.
- If it is not possible to avoid using socket strips and extension cords, then do not connect multiple extension cords or socket strips to each other.
- Use only the power adapter included with delivery.

Instructions: Plugging In to Electrical Power

1. Connect the power adapter to the socket on the FRITZ!Box labeled "Power".

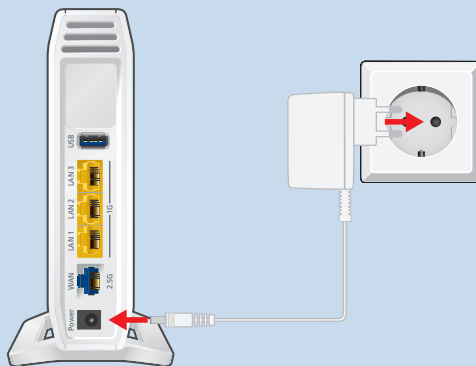

2. Plug the other end into a electrical outlet.

Connecting with the Internet: Via Modem or Router

Overview

The FRITZ!Box is connected with the internet access via the “WAN” socket. For this you need a network cable and an access device appropriate for the connection type.

The following connection types are possible:

Type of Connection	Access Device for the Connection Type
DSL or VDSL line	DSL or VDSL modem
Cable connection	Cable modem
Fiber optic connection	Fiber optic modem (FTTH-ONT/media converter)
Any internet connection	Internet router

Connecting to the Internet Access: Via a DSL/VDSL Modem

Overview


You can connect the FRITZ!Box to a DSL modem in order to connect it with the DSL or VDSL line.

Requirements

- A DSL modem connected to your DSL or VDSL line
- A network cable (for instance, from the FRITZ!Box package)
- The “WAN” socket is configured for “WAN” operation; [see page 139](#).

Instructions: Connecting to the DSL Modem

1. Insert one end of the network cable into the “WAN” port on the FRITZ!Box.

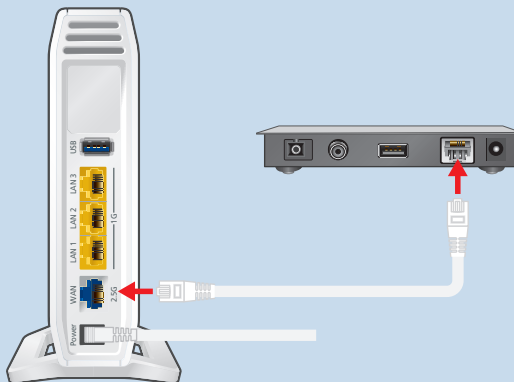

2. Insert the other end of the network cable into the LAN (Ethernet) socket on the cable modem.

Connecting to the Internet Access: Via a Cable Modem


Overview

If you have a cable connection with a cable modem, you can connect the FRITZ!Box to the cable modem, from where it interfaces with the cable connection. Use a network cable.

Requirements

- A cable modem that is connected to your cable connection
- A network cable (for instance, from the FRITZ!Box package)
- The “WAN” socket is configured for “WAN” operation; [see page 139](#).

Example Configuration

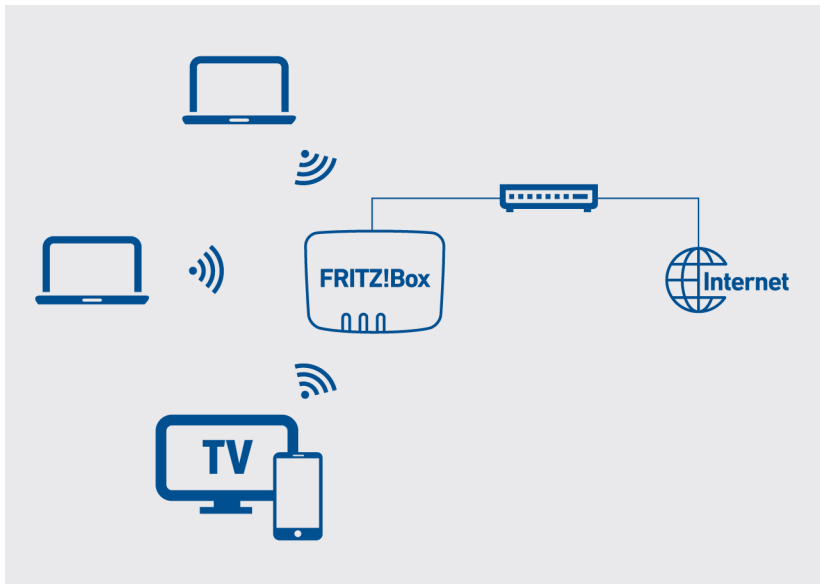

Instructions: Connecting to a Cable Modem

1. Connect one end of the network cable to the LAN (Ethernet) port on the cable modem.
2. Insert the other end of the network cable into the “WAN” port on the FRITZ!Box.
3. Connect a computer with the FRITZ!Box, [see page 42](#) or [see page 44](#).
4. Set up the internet connection for connections via cable in the FRITZ!Box; [see page 63](#).

Connecting to the Internet Access: Via a Fiber Optic Modem


Overview

If you have a fiber optic connection with a fiber optic modem, you can connect the FRITZ!Box to the fiber optic modem (FTTH ONT) in order to connect it with the fiber optic connection.

Requirements

- A fiber optic modem that is connected to your fiber optic connection
- A network cable (for instance, from the FRITZ!Box package)
- The “WAN” socket is configured for “WAN” operation; [see page 139](#).

Example Configuration

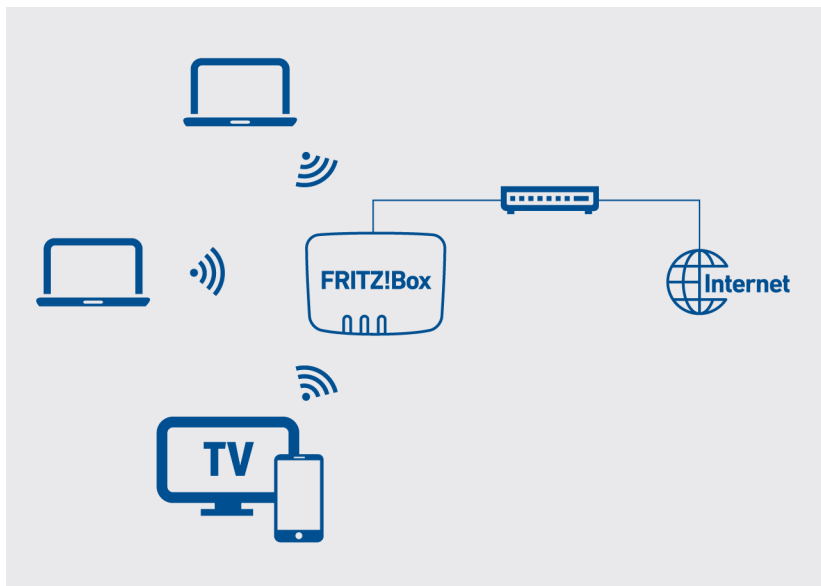

Instructions: Connecting to a Fiber Optic Modem

1. Insert one end of the network cable into the “WAN” port on the FRITZ!Box.
2. Insert the other end of the network cable into the LAN (Ethernet) socket on the fiber optic modem.

Connecting to the Internet Access: Via a Router


Overview

You can connect the FRITZ!Box to a router that is connected with the internet. In this way the FRITZ!Box can use the router's internet connection.

Requirements

- A router connected directly with the internet access
- A network cable (for instance, from the FRITZ!Box package)
- If the FRITZ!Box is operated as a router and generates its own IP network, then it is connected to the router via the "WAN" socket. The "WAN" socket must be configured for "WAN" operation; [see page 139](#).
- If the FRITZ!Box is operated as an IP client on the router, then it must be connected to a LAN socket on the router. The "WAN" socket can be configured as a LAN port; [see page 139](#).

Example Configuration

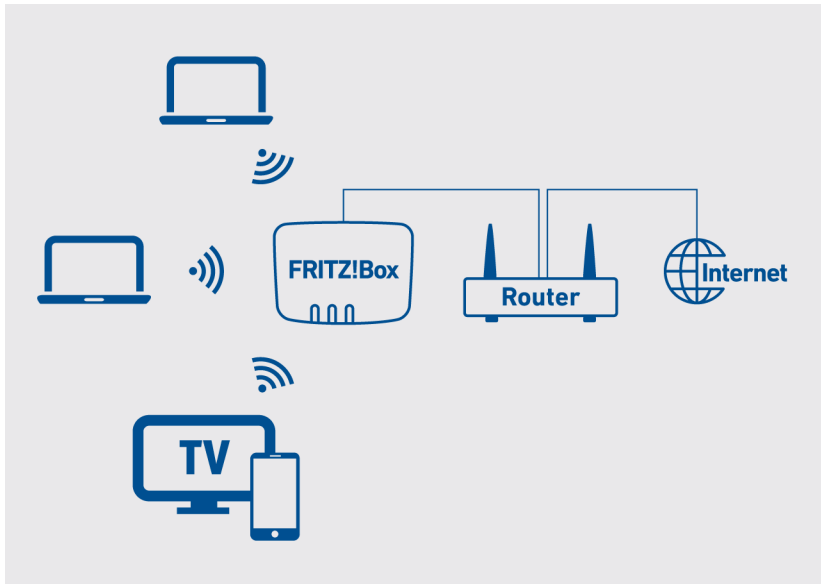

Instructions: Connecting to the Router with a Network Cable

1. Insert one end of the network cable into the “WAN” port on the FRITZ!Box.
If the FRITZ!Box is to be operated as an IP client, then configure the “WAN” socket as a LAN port; [see page 139](#). Alternatively, you can insert the network cable into one of the LAN sockets.
2. Insert the other end of the cable into the network socket on the internet router.

Connecting to the Internet Access: Via Mobile Network

Overview

The FRITZ!Box can connect to the internet via the mobile network.

Supported Devices and Mobile Communication Standards

- USB mobile network dongles for LTE/UMTS/HSPA
- Mobile network dongles and smartphones that support USB tethering
- Smartphones configured as Wi-Fi hotspots

Requirements


- A mobile network device for internet access via LTE, UMTS or HSPA
- A SIM card from a mobile network provider

Restrictions by the Mobile Network Provider



Due to technical limitations on the part of the mobile network providers, some limitations may arise for internet telephone calls and for applications requiring an incoming connection. This is also true for using port sharing, releasing USB storage media for sharing, remote maintenance over HTTPS, Dynamic DNS, and VPN. Contact your network provider for details on any restrictions that may apply.

Example Configuration

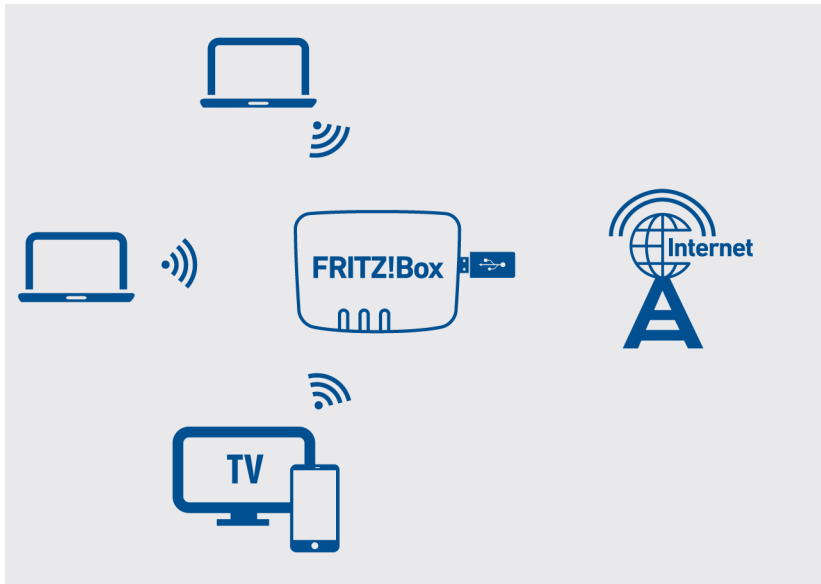

Instructions: Connecting the Mobile Broadband Dongle

1. Insert the mobile broadband dongle in the USB port of the FRITZ!Box.

Instructions: Connecting with the Smartphone via USB

1. Connect the smartphone to the USB port on the FRITZ!Box using a USB cable.

Connecting with the Smartphone via Wi-Fi

You can establish the connection to the smartphone via Wi-Fi; [see page 69](#).

Connecting a Computer Using a Network Cable

Overview


You can connect computers and other network devices with the FRITZ!Box using a network cable. This is recommended especially for the initial configuration of your FRITZ!Box. The way a computer is connected is the same regardless of the computer's operating system.

Rules

- The network cable used to connect a computer or another network device to the FRITZ!Box may be no longer than 100 m.

Instructions: Connecting a Computer Using a Network Cable

1. Insert the network cable into the LAN socket of the computer.
2. Insert the free end of the cable into a LAN socket on the FRITZ!Box.

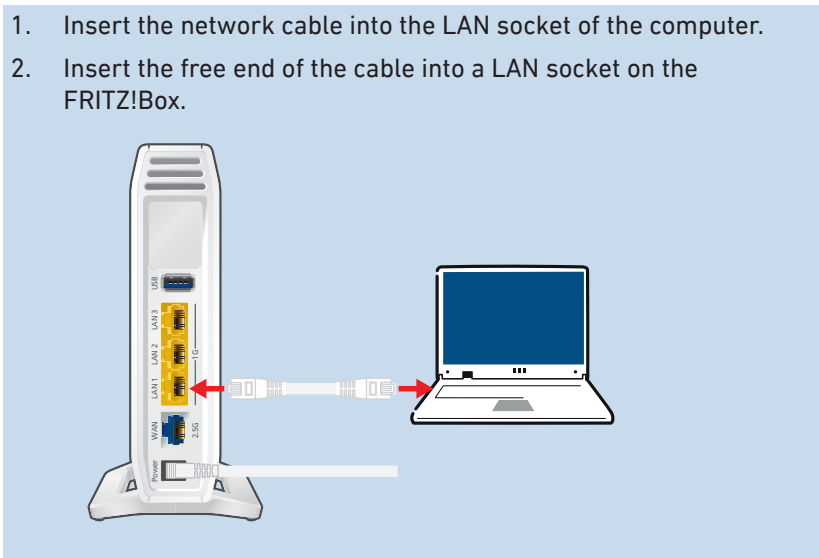

Instructions: Connecting a Network Hub or Network Switch

1. Insert the network cable included in the package into the uplink port of the network hub or network switch.

2. Insert the free end of the cable into a LAN socket on the FRITZ!Box.

Connecting to Computers via Wi-Fi

Overview

You can connect computers and other network devices to the FRITZ!Box without cables via Wi-Fi.

Secure Wi-Fi Connections

Wi-Fi connections can be secured using encryption. Two things are required for this:

- An encryption method
- A key

The encryption method WPA2 and a network key (see the type label on the bottom of the device) are preconfigured in the FRITZ!Box. A wireless device that would like to connect with the FRITZ!Box must register with the FRITZ!Box using the network key. This can be done in the following ways:

- by entering the network key manually
- by transmitting the Wi-Fi network key via WPS

Encryption

The FRITZ!Box supports connections with the WPA (Wi-Fi Protected Access) standard for encryption and authentication in Wi-Fi networks. In this standard, WPA3 mode offers the highest security. The FRITZ!Box supports WPA3 in combination with the common WPA2 mode, since there are still only a few wireless devices that support WPA3. The following settings are available in the FRITZ!Box:

Encryption/WPA Mode	Function
WPA2+WPA3	If a wireless device supports WPA3, the FRITZ!Box uses WPA3; otherwise, WPA2.
WPA2 (CCMP)	Preset in the FRITZ!Box. The FRITZ!Box uses WPA2 for all connections.

Comprehensive information about how to protect your FRITZ!Box and the Wi-Fi network from access by strangers is presented in the internet at en.avm.de/guide.

Requirements

- Wi-Fi is enabled in the FRITZ!Box (the “WLAN” LED is on)

Instructions: Entering the Network Key Manually

1. With the wireless device, search for the Wi-Fi network of the FRITZ!Box. For more information, see the documentation of your wireless device.

The preconfigured name of the FRITZ!Box Wi-Fi network is composed of “FRITZ!Box 4060” and two random letters (for instance, “XY”) and is printed on the type label on the bottom.

2. Click on “OK”.
3. Enter the network key of the FRITZ!Box.

The network key is printed on the type label on the bottom; [see page 19](#).

The Wi-Fi connection will be established.

Instructions: Transferring the Network Key Using WPS


With WPS (Wi-Fi Protected Setup) you can connect a wireless device with the FRITZ!Box quickly and easily without entering the Wi-Fi network key of your FRITZ!Box. This key is transmitted to the wireless device automatically.

1. With the wireless device, search for the Wi-Fi network of the FRITZ!Box. For more information, see the documentation of your wireless device.

The preconfigured name of the FRITZ!Box Wi-Fi network is composed of “FRITZ!Box 4060” and two random letters (for instance, “XY”) and is printed on the type label on the bottom.

2. Start the connection procedure via WPS (see the documentation of your wireless device).

3. On the FRITZ!Box: Press the "Connect" button briefly.

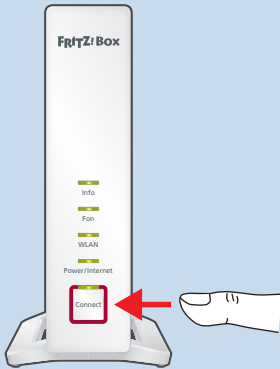

The "Connect" LED flashes.

The Wi-Fi connection will be established.

Connecting Telephones

Overview



During a power outage you cannot make any telephone calls with the connected telephones.

Instructions: Registering a Cordless Telephone

You can register up to six cordless telephones like FRITZ!Fon with the FRITZ!Box.

1. On a cordless telephone: Start registration with a base station.
2. On the FRITZ!Box: Press the “Connect” button.



The “Connect” LED flashes.

3. On a cordless telephone: Enter the PIN of the FRITZ!Box on the telephone (preset value: 0000).
4. In the user interface of your FRITZ!Box: Configure the telephone; [see page 72](#).

Instructions: Connecting an IP Telephone

1. Connect the IP telephone to the FRITZ!Box using a network cable or Wi-Fi.
2. In the user interface of your FRITZ!Box: Configure the telephone; [see page 72](#).

Connecting Smartphones

Overview

You can register your iPhone or Android smartphone with the FRITZ!App Fon using the FRITZ!Box. Then you can make calls with the your smartphone at home, using the telephone numbers configured in the FRITZ!Box. The smartphone can also be reached at your mobile telephone number.

Requirements


- iPhone or Android smartphone
- The setting “Allow access for applications” is enabled in the FRITZ!Box (in the user interface under “Home Network / Network / Network Settings”)


Instructions: Connecting a Smartphone

1. Establish a Wi-Fi connection to the FRITZ!Box on your smartphone.
2. Install FRITZ!App Fon on your smartphone. FRITZ!App Fon is available from the Google Play Store and the Apple App Store.
3. Start the FRITZ!App Fon. FRITZ!App Fon is automatically configured as an IP telephone in the FRITZ!Box.
4. In the user interface of your FRITZ!Box: Configure the IP telephone “FRITZ!App Fon”; [see page 72](#).

Connection Status of FRITZ!App Fon

The icon in the FRITZ!App Fon title bar shows the status of the connection with the FRITZ!Box.

Icon	Meaning
	Wi-Fi connection to the FRITZ!Box is active.

Icon	Meaning
	You can make calls via the FRITZ!Box with your smart-phone.

User Interface

Opening the User Interface.....	52
Homepage of the User Interface.....	53
Using the Wizard for Basic Configuration.....	55
Changing the FRITZ!Box Password.....	57
Logging Out of the User Interface.....	59

Opening the User Interface

Overview


Open the user interface of the FRITZ!Box in a web browser. In the user interface you configure the FRITZ!Box, and receive information on connections, interfaces, and on the entire home network.

Requirements

- Your computer, tablet or smartphone is connected with the FRITZ!Box via Wi-Fi or with the network cable.

Instructions: Opening the User Interface

1. Start a web browser on your computer or mobile device and enter <http://fritz.box> in the address bar.

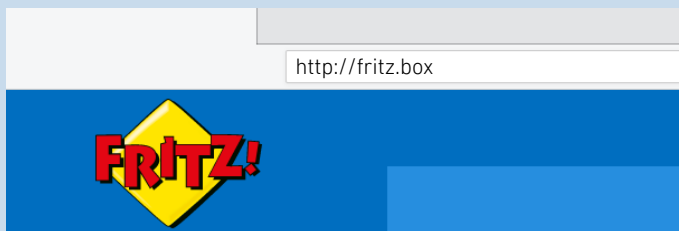

2. Enter the preset FRITZ!Box password and click on “Log In”.
The preconfigured FRITZ!Box password is printed on the type label on the bottom of the FRITZ!Box and on the “FRITZ! Notes” service card.

If you already changed the preset FRITZ!Box password, or if a FRITZ!Box user has already been created, then log in with the changed login information; [see page 174](#).

The FRITZ!Box user interface opens to display the “Overview” home-page.

Homepage of the User Interface

Overview

The “Overview” menu is the start page of your FRITZ!Box user interface. In addition to a clear menu structure and wizards offering step-by-step instructions, the homepage displays important information on the FRITZ!Box and all of the devices connected in the home network.

Overview of Settings on the Homepage

The homepage displays all of the basic information on the status of your FRITZ!Box as well as an overview of all FRITZ!Box settings and devices in the home network. The homepage also presents important notifications for secure, reliable operation of your FRITZ!Box.

- Links take you directly to the pages in the user interface on which you can configure settings for FRITZ!Box features.
- Links to FRITZ! products in the home network open their user interfaces in their own browser tabs.

Area	Function / Display
System	<ul style="list-style-type: none"> • Product name or individually assigned name of the FRITZ!Box • FRITZ!OS installed • Current power consumption • Important notifications for secure, reliable operation of your FRITZ!Box

Area	Function / Display
Connections and Interfaces	<ul style="list-style-type: none"><li data-bbox="445 185 964 248">• Information on internet and telephony connections and on all FRITZ!Box interfaces<li data-bbox="445 268 964 371">• Information on telephone calls and voice messages on the integrated answering machine<li data-bbox="445 391 983 494">• Devices connected to the FRITZ!Box, such as computers, smartphones, network storage, printers, or Smart Home devices<li data-bbox="445 513 848 545">• Configured convenience features

Using the Wizard for Basic Configuration

Overview

The first time the user interface is opened, the Wizard for Basic Configuration of the FRITZ!Box is started. This wizard assists you in entering your account information to connect to the internet and use your telephones.



The wizard can be restarted at any time via the “Wizards” menu in the FRITZ!Box user interface.

Requirements

- The FRITZ!Box password has been supplied. The preconfigured FRITZ!Box password is printed on the type label on the “FRITZ! Notes” FRITZ!Box service card and on the type label on the bottom of your FRITZ!Box.
- The account information has been supplied by your internet service provider.
- The telephone numbers have been supplied by your telephony provider.

Instructions: Using the Wizard for Basic Configuration

1. Enter the preset FRITZ!Box password and click on “Log In”.
The preconfigured FRITZ!Box password is printed on the bottom of the FRITZ!Box.
2. Choose whether you would like to use the AVM services for diagnostics and maintenance. We recommend leaving this option enabled. You can always change the setting later.
3. Click on “Next”.
4. Follow the wizard’s instructions.

Once the wizard is complete, the basic configuration of the FRITZ!Box has been concluded. The FRITZ!Box is ready for the internet and for telephony.

Changing the FRITZ!Box Password

Overview


Within the FRITZ!Box home network you can log in with the FRITZ!Box using a FRITZ!Box password without a username. For the first login with the FRITZ!Box, use the FRITZ!Box password preset for your FRITZ!Box, which you can find on the “FRITZ! Notes” service card and printed on the FRITZ!Box housing. You can change the preconfigured FRITZ!Box password.

Requirements

- You have not yet changed the username automatically created for the FRITZ!Box password; [see page 174](#).

Instructions: Changing the FRITZ!Box Password

1. Open the FRITZ!Box user interface. In the browser, enter the address <http://fritz.box>.
2. Log in using the preconfigured FRITZ!Box password.
If you already changed the preset FRITZ!Box password, then log in with the changed FRITZ!Box password.
3. Click on the menu with the three dots in the header of the FRITZ!Box user interface:

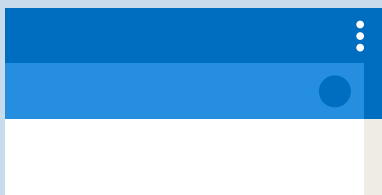

4. Click on “Change Password” in the menu.
5. Enter a new password. Remember to comply with the rules for passwords; [see page 176](#).

We recommend configuring the “Forgot Password” push service; [see page 172](#). When you have forgotten a password, the FRITZ!Box sends an access link to the email address you specified. Using this link you can set a new password.

6. Click on “Apply”.

Logging Out of the User Interface

Overview

Session IDs are assigned for access to the FRITZ!Box user interface. The use of session IDs offers effective protection from attacks from the internet in which attackers send unauthorized data to a web application. For security reasons, we therefore recommend that you log out of the user interface before surfing the web.



Use push services to have yourself notified each time someone logs into or out of your FRITZ!Box; [see page 172](#).

Automatic Logout when Idle

If you have not logged out of the FRITZ!Box user interface, and have not been active in the browser for 20 minutes, you will be logged out automatically.

Instructions: Manual Logout

1. Click on the menu with the three dots in the header of the FRITZ!Box user interface:



2. Click on "Log Off" in the menu.
You have logged out of the FRITZ!Box user interface.

Configuring




Overview: Configuring FRITZ!Box.....	61
Configuring Internet Access via DSL Modem.....	62
Configuring Internet Access via Cable Modem.....	63
Configuring Internet Access via Fiber Optic Modem.....	64
Configuring Internet Access via Another Router.....	66
Configuring Internet Access via Another Router: IP Client.....	68
Configuring Internet Access via a Wireless Device.....	69
Configuring Internet Access via Mobile Network.....	71
Configuring Telephones.....	72
Saving Power with the FRITZ!Box.....	74



Overview: Configuring FRITZ!Box

Overview

Configuration of the FRITZ!Box entails the following steps:

	Instructions
	Set up the internet connection in the FRITZ!Box.
	Set up the connected telephones and their telephone numbers in the FRITZ!Box.
	Configure your smartphone in the FRITZ!Box (optional).

Requirements

- The FRITZ!Box is connected with the internet access.
- You have connected all of the telephones you want to use with the FRITZ!Box.

Configuring Internet Access via DSL Modem

Overview

You can connect the FRITZ!Box to a DSL modem which provides the internet connection.

Operating Mode of the FRITZ!Box

If the FRITZ!Box is connected with the Internet access via DSL modem, the following apply:

- The FRITZ!Box obtains the public IP address from the Internet service provider via DHCP or PPPoE.
- The FRITZ!Box establishes the internet connection itself.
- The FRITZ!Box functions as a router.
- The FRITZ!Box opens up its own IP network.
- The firewall of the FRITZ!Box is enabled.

Requirements

- The FRITZ!Box is connected to a DSL modem, which is connected with the DSL or VDSL line; [see page 33](#).
- The “WAN” socket is configured for “WAN” operation; [see Configuring the “WAN” Connection Socket, page 139](#).

Instructions: Configuring Internet Access on the DSL Connection

1. Open the user interface; [see page 52](#).
2. Select the “Internet / Account Information” menu and the “Internet Connection” tab.
3. Select the “DSL or fiber optic modem” entry from the “Internet connection via” list.
4. For further settings, use the online help of the FRITZ!Box.

Configuring Internet Access via Cable Modem

Overview

You can connect the FRITZ!Box to a cable modem which provides the internet connection.

Operating Mode of the FRITZ!Box

If the FRITZ!Box is connected with the internet access via cable modem, the following apply:

- The FRITZ!Box obtains its public IP address from the internet service provider via DHCP.
- The FRITZ!Box establishes the internet connection itself.
- The FRITZ!Box functions as a router.
- The FRITZ!Box opens up its own IP network.
- The firewall of the FRITZ!Box is enabled.

Requirements

- The FRITZ!Box is connected to a cable modem, which is connected with the cable junction; [see page 34](#).
- The “WAN” socket is configured for “WAN” operation; [see page 139](#).

Instructions: Setting Up Internet Access on the Cable Connection

1. Open the user interface; [see page 52](#).
2. Select the “Internet / Account Information” menu and the “Internet Connection” tab.
3. Select the “Cable modem or internet router” entry in the “Internet connection via” field.
4. For further settings, use the online help.

Configuring Internet Access via Fiber Optic Modem

Overview

You can connect the FRITZ!Box to a fiber optic modem which provides the internet connection.

Operating Mode of the FRITZ!Box

If the FRITZ!Box is connected with the internet access via fiber optic modem, the following apply:

- The FRITZ!Box obtains its public IP address from the internet service provider via DHCP or PPPoE.
- The FRITZ!Box establishes the internet connection itself.
- The FRITZ!Box functions as a router.
- The FRITZ!Box opens up its own IP network.
- The firewall of the FRITZ!Box is enabled.

Requirements

- The FRITZ!Box is connected to a fiber optic modem, which is connected with the fiber optic connection; [see page 36](#).
- The “WAN” socket is configured for “WAN” operation; [see page 139](#).

Instructions: Setting Up Internet Access on the Fiber Optic Connection

1. Open the user interface; [see page 52](#).
2. Select the “Internet / Account Information” menu and the “Internet Connection” tab.
3. Select the “DSL or fiber optic modem” entry from the “Internet connection via” field.
4. Select your fiber optic operator. If your fiber optic provider is not included in the list, select the “other internet service provider” entry.

5. For further settings, use the online help of the FRITZ!Box.

Configuring Internet Access via Another Router

Overview

You can operate the FRITZ!Box as a router on another router. The other router provides the internet connection.

Operating Mode of the FRITZ!Box

The following applies to this kind of internet connection:

- The FRITZ!Box receives an IP address from the upstream router via DHCP (default setting).
- The FRITZ!Box functions as its own router.
- The FRITZ!Box opens up its own IP network.
- The firewall of the FRITZ!Box is enabled.

Requirements

- The FRITZ!Box is connected with a router that provides the internet connection; [see page 38](#).
- The “WAN” socket is configured for “WAN” operation; [see page 139](#).

Instructions: Setting Up Internet Access via WAN (as a Router)

1. Open the user interface; [see page 52](#).
2. Select the “Internet / Account Information” menu and the “Internet Connection” tab.
3. In the “Internet Service Provider” area, select the settings “More internet service providers” and then “Other internet service provider”.
4. From the “Connect via” area, select the “Connection to an external modem or router” option.
5. Select the “Cable modem or internet router” entry in the “Internet connection via” field.

6. For further settings, use the online help of the FRITZ!Box.

Configuring Internet Access via Another Router: IP Client

Overview

You can connect the FRITZ!Box as an IP client to a router which provides the internet connection.

Operating Mode of the FRITZ!Box

The following apply in IP client mode:

- The FRITZ!Box receives an IP address from the upstream router via DHCP (default setting).
- The FRITZ!Box becomes a part of the router's IP network.
- The network devices connected to the FRITZ!Box receive their IP addresses from the upstream router.
- The firewall of the FRITZ!Box is disabled.

Requirements

- The FRITZ!Box is connected with a router that provides the internet connection. There are two possibilities for connecting the FRITZ!Box with the router:
 - Via the WAN socket. The socket must be configured as a LAN port; [see page 139](#).
 - Via one of the LAN sockets.

Instructions: Setting Up Internet Access via LAN (as an IP Client)

1. Open the user interface; [see page 52](#).
2. Select the "Internet / Account Information" menu and the "Internet Connection" tab.
3. Select "Internet router as IP client" from the "Internet connection via" list.
4. For further settings, use the online help of the FRITZ!Box.

Configuring Internet Access via a Wireless Device

Overview

You can use the FRITZ!Box on an existing internet connection by connecting to it via Wi-Fi. The FRITZ!Box can share the internet connection of another device via a wireless connection. The other device can be a router, for instance, or a smartphone configured as a hotspot.

Operating Mode of the FRITZ!Box

The following applies to this kind of internet connection:

- The FRITZ!Box receives an IP address from the upstream router via DHCP (default setting).
- The FRITZ!Box functions as its own router.
- The FRITZ!Box opens up its own IP network.
- The firewall of the FRITZ!Box is enabled.

Requirements

- The Wi-Fi network transmits in the 2.4-GHz frequency range.
- The connection is encrypted using WPA2 or WPA3.
- The Wi-Fi network allows the FRITZ!Box to set up a Wi-Fi connection.

Instructions: Configuring Internet Access via Wi-Fi

1. Open the user interface; [see page 52](#).
2. Select the “Internet / Account Information” menu.
3. Select the “Existing connection over Wi-Fi” entry from the “Internet service provider” list.
A list of the Wi-Fi networks in the vicinity is displayed.
4. Select the Wi-Fi network you want to connect the FRITZ!Box with.

5. Enter the network key of the Wi-Fi network in the “Network key” field in the “Security” area.
6. Save your settings by clicking “Apply”.

The FRITZ!Box is configured as a router and the network range is changed automatically. The FRITZ!Box, along with the connected network devices, forms its own self-contained network.

Configuring Internet Access via Mobile Network


Overview

In the FRITZ!Box you can configure internet access via the mobile network.

Requirements

- A mobile broadband dongle or an Android smartphone with USB tethering enabled must be connected to the USB port of the FRITZ!Box; [see page 40](#).

Instructions: Configuring the Internet Connection via the Mobile Network

1. Open the user interface; [see page 52](#).
2. Select "Internet / Mobile Network".
3. For instructions, open the online help .

Configuring Telephones

Overview

Once you have connected your telephony devices, configure these devices in the FRITZ!Box. For each device, specify:

- Telephone number for outgoing calls to the public telephone network
- How incoming calls should be handled: Should the device react (ring, for instance) to every call, or only respond to calls for certain telephone numbers?
- Further settings that depend on the kind of device.

Requirements

- Your own telephone numbers are set up in the FRITZ!Box.


Rules

The following rules apply for IP telephones:

- IP telephones are configured in the FRITZ!Box such that no international calls are possible. You can disable this security feature, [see page 73](#).
- Various FRITZ!Box features are not available for IP telephones, including telephone books, fax and data connections, routing, busy on busy, controlling FRITZ!Box functions (for instance, switching Wi-Fi on and off).

Instructions: Configuring Telephones and Other Devices

1. Open the user interface; [see page 52](#).
2. Select "Telephony / Telephony Devices".

3. If the device to be configured is not yet included in the list of telephony devices, click on “Configure New Device”. The wizard guides you through the assignment of telephone numbers and enters the device in the list.
4. To configure further settings for a device in the list, click on the “Edit”  button of the device. The kind of device determines which additional settings are available.

Instructions: Enabling International Calls for an IP Telephone

An IP telephone is configured in the FRITZ!Box such that only domestic calls and calls to emergency numbers are possible. You can disable this security feature:

1. Open the user interface; [see page 52](#).
2. Under “Telephony / Telephone Numbers”, select the “Line Settings” tab.
3. Under “Security”, click on “Change Selection”.
4. Disable the checkbox next to the desired IP telephone and click on “OK”.
5. Save your settings by clicking “Apply”.

Saving Power with the FRITZ!Box

Overview

The FRITZ!Box offers various settings for energy-saving operation. The following section describes how you can configure these settings and what potential energy savings can be expected.

Viewing Information on Energy Consumption

The current power consumption of the total FRITZ!Box system is displayed on the “Overview” page of the user interface.

Information on the power consumption of the individual areas, and on the average power consumption over the last 24 hours, is presented in the FRITZ!Box user interface under “System / Energy Monitor / Power Consumption”.



Using Savings Potential

What	How to	Where
Wi-Fi	Configure a schedule; see page 152	“Wi-Fi / Schedule” menu
	Switch off Wi-Fi; see page 152	• “Wi-Fi / Wi-Fi Network” menu
	Reduce the maximum transmitter power	“Wi-Fi / Wi-Fi Channel / Wi-Fi Channel Settings / Additional settings” menu
USB	Use the USB port in energy-saving (Green) mode; see page 147	“Home Network / USB/Storage / USB Settings” menu

Saving Power with Smart Home

With intelligent Smart Home devices like FRITZ!DECT, electrical appliances are integrated into the home network. This way they can be switched on and off by schedule. At the same time, they inform the FRITZ!Box about consumption, energy costs incurred, and the CO₂ footprint.

Instructions: Configuring a Schedule for Electrical Appliances in the Home Network

1. Open the user interface; [see page 52](#).
2. Select "Smart Home / Device Management / Edit Socket  / Automatic Switching".
3. For instructions, open the online help .

Mesh with FRITZ!

Expanding a Wi-Fi Network with Mesh.....	77
Enabling Mesh for FRITZ!Repeater and FRITZ!Powerline.....	79
Using FRITZ!Box as a Mesh Repeater.....	81
Using Telephony in the Mesh.....	82

Expanding a Wi-Fi Network with Mesh

Overview

If the Wi-Fi network of the FRITZ!Box does not reach all of your rooms, then you can extend it with a FRITZ!Repeater, a FRITZ!Powerline with Wi-Fi functionality, or with an additional FRITZ!Box. Mesh combines the individual Wi-Fi networks of the FRITZ! devices into a single powerful Wi-Fi network.

Mesh is available in FRITZ!OS version 7.00 or later.



Only FRITZ! devices can be integrated into the FRITZ!Box Mesh. If you expand the Wi-Fi network with a wireless repeater from another manufacturer, the Mesh functions are not available.

FRITZ! Devices with Mesh

With the following FRITZ! devices you can expand the Wi-Fi network of the FRITZ!Box:

FRITZ! Device	Type of Connection to the FRITZ!Box
FRITZ!Repeater	<ul style="list-style-type: none"> • Wi-Fi • LAN cable (only for FRITZ!Repeater devices with a LAN socket) <p>More information at en.avm.de/products/fritzwlan.</p>
FRITZ!Powerline	<ul style="list-style-type: none"> • Electrical wiring <p>For more information, see en.avm.de/products/fritzpowerline.</p>
second FRITZ!Box The FRITZ!Box must support the "Mesh Repeater" function.	<p>See the FRITZ!Box manual at en.avm.de/service/manuals.</p> <p>For your FRITZ!Box 4060, see see Using FRITZ!Box as a Mesh Repeater, page 81.</p>

Features in the Mesh

The FRITZ!Box is the hub of the Mesh, the Mesh Master. Other FRITZ! devices in the Mesh are Mesh Repeaters. The following features provide for high-performance connections between the devices and for convenience in the Mesh:

- Consistent Wi-Fi settings: Mesh Repeaters adopt from the Mesh Master the network name (SSID), network key, Wi-Fi guest access and Wi-Fi schedule.
- Mesh overview in the user interface of the Mesh Master: Here you can perform updates for all FRITZ! devices in the Mesh.
- Improved information exchange among FRITZ! devices provides for faster wireless connections.
- Mesh Wi-Fi Steering (access point steering, FRITZ!OS 7.10 or later): The Mesh Master can select the best FRITZ! device for each wireless device to use to access the home network.

Enabling Mesh for FRITZ!Repeater and FRITZ!Powerline


Overview

In order to benefit from the advantages of Mesh, enable Mesh for all FRITZ!Repeaters and FRITZ!Powerline devices located in the home network of your FRITZ!Box.

Requirements


- FRITZ!OS 7.00 or later is installed on the FRITZ!Box.
- FRITZ!Repeater version 7.00 or later is installed on the FRITZ!Powerline or FRITZ!OS.
- The FRITZ!Repeater or FRITZ!Powerline is located in the home network of the FRITZ!Box.

Instructions: Enabling Mesh for a FRITZ!Repeater

1. Open the FRITZ!Box user interface; [see page 52](#).
2. Select "Home Network / Mesh".
3. The FRITZ!Box is displayed in the overview with the "Mesh enabled"  icon. If the icon is also displayed for FRITZ!Repeater, then Mesh is already enabled for the FRITZ!Repeater. If the icon is missing next to the FRITZ!Repeater, continue with the next step.
4. Press the button on the FRITZ!Repeater.
After the button is released, the "WLAN" or "Connect" LED on the FRITZ!Repeater flashes rapidly.
5. Within 2 minutes, start WPS on the FRITZ!Box. Do this by pressing the "Connect" button until the "Info" LED starts flashing.

Mesh is enabled and the FRITZ!Repeater is displayed in the overview marked with the "Mesh enabled" icon.

Instructions: Enabling Mesh for a FRITZ!Powerline

1. Open the FRITZ!Box user interface; [see page 52](#).
2. Select “Home Network / Mesh”.
3. The FRITZ!Box is displayed in the overview with the “Mesh enabled”  icon. If the icon is also displayed for FRITZ!Powerline, then Mesh is already enabled for the FRITZ!Powerline. If the icon is missing next to the FRITZ!Powerline, continue with the next step.
4. Press the connect button on FRITZ!Powerline:

FRITZ!Powerline Model	Connection Button
1260E	Connect
1240E, 546E, 540E	WLAN/WPS

All of the LEDs on FRITZ!Powerline will be flashing when you release the button.

5. Within 2 minutes, start WPS on the FRITZ!Box. Do this by pressing the “Connect” button until the “Info” LED starts flashing.

Mesh is enabled and the FRITZ!Powerline is displayed in the overview marked with the “Mesh enabled” icon.

Using FRITZ!Box as a Mesh Repeater


Overview

You can use your FRITZ!Box 4060 as a Mesh Repeater. As Mesh Repeater, the FRITZ!Box 4060 expands the Wi-Fi network of another FRITZ!Box which is connected to the internet connection. The other FRITZ!Box is the Mesh Master, and the Wi-Fi networks of both FRITZ!Box products are combined to make the Mesh Wi-Fi. All Mesh Repeaters automatically adopt the Wi-Fi network settings from the Mesh Master (network name, network key, guest access, schedule) and expand the Wi-Fi network.

Requirements

- FRITZ!OS 7.00 or later is installed on the FRITZ!Box.

Instructions: Configuring FRITZ!Box as a Mesh Repeater

1. Open the user interface; [see page 52](#).
2. Select "Home Network / Mesh / Mesh Settings".
3. For instructions, open the online help .

Instructions: Using the Telephone Book of the Mesh Master

On the Mesh Repeater you can use the telephone books on the Mesh Master. Then telephone books that are saved on the Mesh Repeater itself can no longer be used.

1. On the Mesh Repeater: Open the user interface; [see page 52](#).
2. Select "Home Network / Mesh / Mesh Settings".
3. Enable the "Use the telephone book of the Mesh Master" checkbox.
4. Click on "Apply".

Using Telephony in the Mesh

Overview


In a Mesh with more than one FRITZ!Box, you can configure your telephone numbers in one FRITZ!Box (the Mesh Master) and adopt them automatically on every other FRITZ!Box in the Mesh.

Whenever you add or change telephone numbers in the Mesh Master, the changes are automatically applied to the other FRITZ!Boxes.

Requirements

- Your telephone numbers are registered in the FRITZ!Box that is configured as the Mesh Master.
- All FRITZ!Boxes on which you would like to adopt the telephone numbers are configured as Mesh Repeaters.

Instructions: Setting up Telephony in the Mesh

1. Open the user interface; see [page 52](#).
2. Select “Home Network / Mesh / Mesh Settings”.
3. For instructions, open the online help .

User Interface: Internet Menu

Using AVM Services for Diagnostics and Maintenance.....	84
Configuring Parental Controls.....	86
Creating and Assigning Access Profiles.....	89
Editing Filter Lists.....	91
Configuring Priorities for Internet Use.....	93
Configuring Port Sharing.....	94
Enabling Dynamic DNS.....	96
Remote Access to the FRITZ!Box.....	97
Configuring VPN Remote Access.....	99
Configuring IPv6.....	101
Configuring FRITZ!Box as a LISP Router.....	103

Using AVM Services for Diagnostics and Maintenance

Overview

The AVM services for diagnostics and maintenance keep your FRITZ!Box and the FRITZ!OS operating system up to date and support the security and further development of your FRITZ!Box.



We recommend leaving the use of all AVM services enabled for your FRITZ! device.

AVM Services


The following AVM services are provided by your FRITZ!Box:

AVM Service	Explanation
Search for updates	Your FRITZ!Box connects with the AVM update server regularly to search for and install new versions of FRITZ!OS.
Diagnostics data for error analysis	Upon suspicion of misuse by third parties, your FRITZ!Box transmits error reports or technical diagnostics data to AVM for analysis.
Diagnostics data for system maintenance	Your FRITZ!Box transmits device-specific data to AVM for the development of security updates and to further develop FRITZ!OS.

Data Protection

The diagnostics data and the device-specific data transmitted by your FRITZ!Box to AVM do not contain any personalized data. The data transmitted serve the exclusive purpose of technical adaptations and optimizations of your FRITZ!Box. Also, AVM does not pass these data on to third parties. The exact wording of the data privacy statement is presented under “Legal Notice / Data Privacy Statement” in the online help.

Instructions: Configuring AVM Services

1. Open the user interface; [see page 52](#).
2. Select "Internet / Account Information / AVM Services".
3. For instructions, open the online help .

Configuring Parental Controls

Overview

With parental controls you can control network devices' internet use. For each individual network device, you can limit the duration and content of internet use. The specifications for temporal and content-related restrictions are created and saved as access profiles. You assign these access profiles to the network devices.

- You can create multiple different access profiles; [see page 89](#).
- With the device block you can block all internet use for a network device without using a special access profile; [see page 87](#).
- With tickets you can extend the restricted use time for individual network devices. A ticket is redeemed on the network device and extends the use time for 45 minutes. Tickets can be redeemed before the use time has been exhausted to avoid interruption of online time. Distribute ticket for extended use time; [see Instructions: Distributing a Ticket for Extended Use Time, page 88](#).
- The remaining online time permitted can be queried on any network device with restricted online time; [see Instructions: Querying Remaining Online Time, page 88](#).

Example

You have three children, all of whom use various devices that access the internet via FRITZ!Box. You would like to restrict your children's use of the internet as follows:



- Their daily time online is to be restricted to a few hours.
- Access to websites with adult content is to be blocked.

With parental controls you can restrict the internet use of each child individually.

Requirements

- The FRITZ!Box establishes its own connection to the internet. If the FRITZ!Box is configured as an IP client that uses the internet connection of another router, you must use the parental controls set on the other router.

Instructions: Configuring Parental Controls for a Network Device

1. Open the user interface; [see page 52](#).
2. Select "Internet / Filters / Access Profiles".
3. If there is no access profile with the restrictions you want, then create an access profile:
 - For instructions, open the online help .
4. Select "Internet / Filters / Parental Controls".
5. Click on the "Change Access Profile" button.
6. Assign to the network device the access profile with the desired restrictions:
 - For instructions, open the online help .

Instructions: Blocking a Device

1. Open the user interface; [see page 52](#).
2. Select "Internet / Filters / Parental Controls".
3. Select the network device in the device overview and click on the "Block" link.

Internet access is blocked for this network device. It is no longer possible to access the internet from this device.

Instructions: Distributing a Ticket for Extended Use Time

1. Open the user interface; [see page 52](#).
2. Select “Internet / Filters / Access Profiles”.
In the “Tickets for Additional Online Time” area a list with 10 tickets is displayed.
3. Distribute the tickets by printing out the list with the tickets.
 - Click on “Print Tickets”.
 - › The 10 tickets are shown in the “Tickets for Online Access” window.
 - Print out the list and distribute the tickets to the users of the network devices whose online time is to be extended.
4. If you want to distribute only one single ticket, then click on “Share Ticket”.
A ticket is saved to the clipboard and can be sent to the user of a network device however you like. In the list of tickets, that ticket is displayed crossed out in gray.

Instructions: Querying Remaining Online Time

1. Open a browser on the network device for which the remaining online time is to be queried.
2. Enter “fritz.box” in the address bar of the browser.
The time remaining before the permitted online time has been exhausted is shown in the “Parental Controls” window. If the user has a ticket to extend online time, it can be redeemed here.

Creating and Assigning Access Profiles

Overview

In an access profile you can enter the time and content restrictions for internet use. The network devices can have different access profiles. An access profile can be assigned to one or multiple network devices. A network device then accesses the internet exactly as specified in the access profile.

Access Profile: Definition

An access profile is a provision that describes exactly what is allowed during internet use. An access profile takes into consideration three aspects of internet use:

Aspect	Description
Time limit	With time limits you can define when and for how long internet use is permitted each day.
Filters for websites	With the filter lists you can specify which websites are allowed to be accessed.
Blocked network applications	With the list of blocked network applications you specify which network applications are allowed to communicate over the internet. This list can contain, for instance, file sharing programs or chat software.

Example


You have three children and would like to control the internet use of each child in different ways.

- Create an individual access profile for each child.
- Include in this access profile the time and content restrictions to be imposed on the given child.


Preconfigured Access Profiles

Name	Properties
Standard	<ul style="list-style-type: none">• Set by default to unrestricted use• Automatic access profile for network devices registering with the home network for the first time• Can be changed
Guest	<ul style="list-style-type: none">• Automatic, exclusive access profile for network devices registering with the guest network• Can be changed
Unrestricted	<ul style="list-style-type: none">• Unrestricted internet use• Cannot be changed

Instructions: Creating an Access Profile

1. Open the user interface; [see page 52](#).
2. Select "Internet / Filters / Access Profiles".
3. For instructions, open the online help .

Instructions: Assigning an Access Profile

1. Open the user interface; [see page 52](#).
2. Select "Internet / Filters / Parental Controls".
3. For instructions, open the online help .

Editing Filter Lists

Overview

You can use a filter list to block access to websites with inappropriate content. Upon delivery, there are two empty lists in the FRITZ!Box. You can enter websites in these lists. These lists can then be used as filters in the access profiles.

Types of Lists

There is the “Permitted websites” list and the “Blocked websites” list. Use one of the lists to block access to websites with inappropriate contents. The lists work in the following way:


Filter List	Function and Use
Permitted websites	<ul style="list-style-type: none"> • Websites included in the permitted websites list can be accessed. • Use the permitted websites list if most websites are to be blocked and only a few are permitted.
Blocked websites	<ul style="list-style-type: none"> • Websites included in the blocked websites list are blocked. • Use the blocked websites list if most websites are to be permitted and only a few are to be blocked.

Requirements

- The FRITZ!Box establishes its own connection to the internet. If the FRITZ!Box is configured as an IP client that uses the internet connection of another router, you must use the filter functions set on the other router.

Instructions: Editing Filter Lists

1. Open the user interface; [see page 52](#).
2. Select “Internet / Filters / Lists”.

3. For instructions, open the online help .

Configuring Priorities for Internet Use

Overview


For network devices or network applications you can define different priorities for access to the internet connection.

Prioritization Categories

There are three prioritization categories for network applications:

- Real-time applications have the highest priority. This category is intended for applications with high demands on transmission speed and reaction times (for example, internet telephony, IPTV, video on demand). If an application of this category uses the internet connection to full capacity, no other data will be transmitted.
- Prioritized applications have intermediate priority. This category is intended for applications that require fast reaction times (for example, company access, terminal applications, games). These applications will be granted higher priority. When an application of this category uses the full capacity of the internet connection, the data of other applications will be transferred with lower priority.
- Background applications have the lowest priority. This category is for applications that run in the background, which are treated with low priority when the internet connection is running at capacity (for instance, automatic updates, peer-to-peer services). If no other network applications are active, then the background applications receive the entire bandwidth.

Instructions: Configuring Priorities

1. Open the user interface; [see page 52](#).
2. Select "Internet / Filters / Prioritization".
3. For instructions, open the online help .

Configuring Port Sharing

Overview

With default settings in the FRITZ!Box, programs on your computer and LAN cannot be accessed from the internet. For applications like online games and file sharing software, or server services like HTTP, FTP, VPN, terminal and remote access servers, you have to make your computer accessible to other internet users.

Port Sharing

Using port sharing you allow incoming connections from the internet. By releasing certain ports for incoming connections, you grant other internet users controlled access to the computers in your network.


Port Sharing on Protocols

Port sharing in the FRITZ!Box is possible on the following protocols:

Protocol	Internet Protocol	Explanation
PING	IPv6	The FRITZ!Box responds to ping inquiries from the internet addressed to the IPv6 address of the FRITZ!Box. Additionally, you can set up PING6 port forwarding rules for each computer in the home network since each computer has its own globally valid IPv6 address.
TCP UDP	IPv4	Within IPv4 networks you can open the FRITZ!Box firewall for the TCP and UDP protocols when entering the port range. One port can be opened for exactly one computer.

Protocol	Internet Protocol	Explanation
	IPv6	Within IPv6 networks you can open the FRITZ!Box firewall for the TCP and UDP protocols when entering the port range. One port can be opened for each computer in the network.
ESP GRE	IPv4	Within IPv4 networks you can open the firewall for the two protocols ESP and GRE, which do not use ports.

Instructions: Configuring Port Sharing

1. Open the user interface; [see page 52](#).
2. Select "Internet / Permit Access / Port Sharing".
3. For instructions, open the online help .

Enabling Dynamic DNS

Overview

Every time the internet connection is interrupted, the internet service provider reassigns the IP address. The IP address may change in the process. Dynamic DNS is an internet service that makes it possible for the FRITZ!Box to remain accessible from the internet at all times under a fixed name, the domain name, even when the public IP address changes.

You must register with a dynamic DNS provider to use this service. Every time the IP address changes, the FRITZ!Box transmits the new IP address to the dynamic DNS provider in the form of an update request. Then the domain name is assigned to the current IP address by the dynamic DNS provider.


Dynamic DNS and MyFRITZ!

MyFRITZ! can be used as an alternative to dynamic DNS. The two services can also be used in parallel. For more information on MyFRITZ!; see page 206.

Requirements

- You are registered with a dynamic DNS provider and have set up a domain name.

Instructions: Enabling Dynamic DNS

1. Open the user interface; see page 52.
2. Select "Internet / Permit Access / DynDNS".
3. For instructions, open the online help .

Remote Access to the FRITZ!Box

Overview

Over the internet it is possible to access the user interface of the FRITZ!Box. With a laptop, smartphone or tablet you can configure settings in the FRITZ!Box user interface.

HTTPS, FTP and FTPS


Protocol	Function
HTTPS (Hypertext Transfer Protocol Secure)	<p>HTTPS is an internet protocol for bug-proof communication between the web server and the browser in the World Wide Web.</p> <p>Enable this protocol to allow access to the FRITZ!Box from the internet.</p>
FTP (File Transfer Protocol)	<p>FTP is a network protocol for transmitting files in IP networks.</p> <p>Enable this protocol to allow access by FTP to the FRITZ!Box storage media from the Internet.</p>
FTPS (FTP over SSL)	<p>FTPS is a method for encrypting the FTP protocol.</p> <p>Enable this protocol to secure transmission over FTP.</p>

Requirements

- Access to the user interface: Every user who would like to access the FRITZ!Box externally from the internet requires a FRITZ!Box user account which is authorized for access from the internet.

- Access to storage: Every user who would like to access the storage of the FRITZ!Box externally from the internet requires a FRITZ!Box user account with the rights to access from the internet and to access the contents on the storage media.
- The protocols for the desired access must be enabled in the FRITZ!Box.

Instructions: Enabling HTTPS, FTP and FTPS in the FRITZ!Box


1. Open the user interface; [see page 52](#).
2. Select "Internet / Permit Access / FRITZ!Box Services".
3. For instructions, open the online help .

Configuring VPN Remote Access

Overview

VPN stands for Virtual Private Network. Via VPN, secure remote access to the network of the FRITZ!Box can be established. The connection is established via the internet. The data are transmitted in encrypted form via what is known as a tunnel. This excludes the possibility of unauthorized access to the data. This way field representatives, for instance, can connect with the corporate network via VPN.

Example Configuration

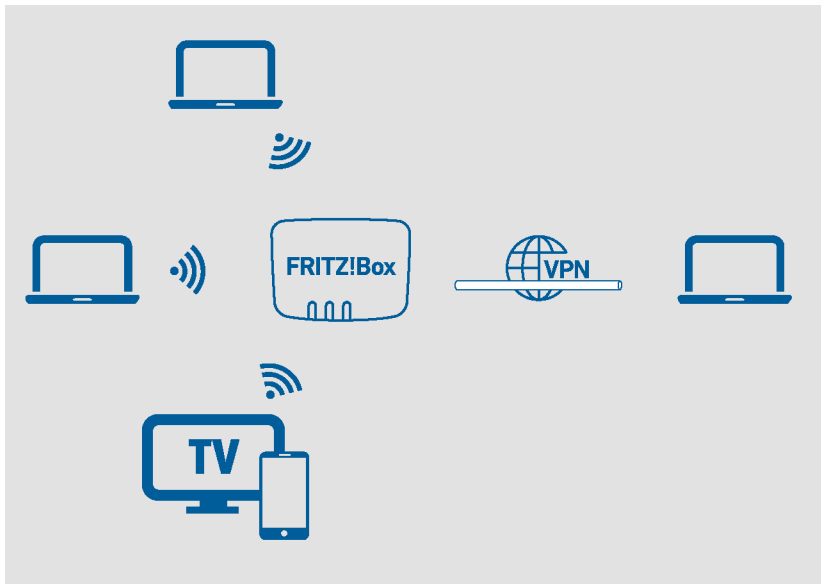


VPN Service Portal

Under en.avm.de/vpn, the AVM website presents comprehensive information on VPN in general and in connection with the FRITZ!Box.

Also on the VPN Service Portal is the “FRITZ!VPN” software for free downloading. The “FRITZ!VPN” program is a VPN client for Windows. Install the program on the network devices from which you would like to reach the FRITZ!Box over a VPN connection.

Instructions: Configuring VPN in the FRITZ!Box

1. Open the user interface; [see page 52](#).
2. Select “Internet / Permit Access / VPN”.
3. For instructions, open the online help .

Configuring IPv6

Overview

IPv6 stands for internet protocol version 6. This is the successor protocol to IPv4. IPv6 is more powerful, and has more addresses and better security properties than IPv4.

The FRITZ!Box supports IPv6 and can establish IPv6 connections.

Services that Support IPv6


Home Network / Internet	Services that Support IPv6
IPv6-capable services in the home network	<ul style="list-style-type: none"> • FRITZ!NAS access via SMB or FTP/FTPS • Access to the user interface with http or https over IPv6 • The DNS resolver of the FRITZ!Box supports queries for IPv6 addresses (AAAA records) and can query the upstream DNS resolver of the internet service provider over IPv6. • The globally valid prefix is distributed via router advertisement. • For guest access to the Wi-Fi network, the home network and Wi-Fi guests are separated by IPv6 subnetworks. • UPnP, UPnP AV media server

Home Network / Internet	Services that Support IPv6
IPv6-capable services in the internet	<ul style="list-style-type: none">• FRITZ!NAS access via FTPS• Completely closed firewall to protect against unsolicited data from the internet (Stateful Inspection Firewall)• Voice over IPv6• Automatic provisioning (TR-069)• Time synchronization over NTP (Network Time Protocol)• Remote access via HTTPS• Dynamic DNS via dyndns.org or namemaster.de

Requirements

- IPv6 must be installed and enabled on the computers in your home network (standard in Windows since Windows Vista and Windows 7, in Mac OS X since macOS 10).

Instructions: Configuring IPv6 in the FRITZ!Box

1. Open the user interface; [see page 52](#).
2. Select "Internet / Account Information / IPv6".
3. For instructions, open the online help .

Configuring FRITZ!Box as a LISP Router

Overview


LISP stands for Locator/Identifier Separation Protocol. LISP is a routing architecture which separates information about location and identity: there is one IP address for the location and one for the identity. The FRITZ!Box can be configured as a LISP router.

LISP is useful if technical or organizational reasons make it preferable to keep the same IP addresses, even when you switch internet service providers. With LISP, devices do not lose their identity (host devices, virtual machines) when they change location.

Requirements

- You are registered with a LISP provider.

Instructions: Configuring the FRITZ!Box as a LISP Router

1. Open the user interface; [see page 52](#).
2. Select "Internet / Account Information / LISP".
3. For instructions, open the online help .

User Interface: Telephony Menu

Configuring and Using the Telephone Book.....	105
Configuring and Using the Answering Machine.....	108
Configuring Call Diversion.....	110
Configuring Call Blocks.....	111
Configuring Do Not Disturb.....	113
Setting an Alarm.....	114
Configuring a Dialing Rule.....	115
Reducing the Radiation of DECT Emissions.....	116
Allowing Non-Encrypted DECT Connections.....	118


Configuring and Using the Telephone Book

Overview

You can set up various telephone books in the FRITZ!Box. Which telephone book features are available depends on the telephone used:


Telephone	Available Functions
FRITZ!Fon	<ul style="list-style-type: none"> • Telephone book available in the FRITZ!Fon menu • Option for separate telephone books for multiple FRITZ!Fon telephones • Quick-dial numbers • Click to Dial
Cordless telephone with CAT-iq 2.0 support	<ul style="list-style-type: none"> • Telephone book available in the menu of the telephone • Quick-dial numbers • Click to Dial
FRITZ!App Fon	Telephone book available in FRITZ!App Fon
IP telephone	FRITZ!Box telephone book not available
Others	<ul style="list-style-type: none"> • Quick-dial numbers • Click to Dial

Instructions: Setting Up a New Telephone Book in the FRITZ!Box

1. Open the user interface; [see page 52](#).
2. Select "Telephony / Telephone Book / New telephone book".
3. For instructions, open the online help .


Instructions: Creating a New Telephone Book Entry

1. Open the user interface; [see page 52](#).

2. Select “Telephony / Telephone Book”.
3. For instructions, open the online help .


Instructions: Copying/Moving Telephone Book Entries

You can copy or move telephone book entries from one telephone book to another.

1. Open the user interface; [see page 52](#).
2. Select "Telephony / Telephone Book".
3. For instructions, open the online help .

Instructions: Enabling and Using "Click to Dial"

With "Click to Dial" you can establish calls from the call list or the telephone book.

1. Open the user interface; [see page 52](#).
2. Select "Telephony / Telephone Book / Click to Dial".
3. For instructions, open the online help .

Configuring and Using the Answering Machine

Overview

You can configure up to 5 answering machines in the FRITZ!Box, including multiple answering machines for the same telephone number.

Features

- If desired, you can receive any new messages automatically by email.
- With a schedule you can define times to switch on and off on different days of the week.
- With remote playback you can check answering machines from on the go.

Example 1


You have one telephone number for personal contacts and a second telephone number for business contacts. You can set up a separate answering machine for each telephone number.

Example 2

You use the answering machine in the office and the answering machine should record messages at all times. However, callers should hear a different message during office hours than outside of business hours.

For this you can set up two answering machines with different messages for the office telephone numbers. Configure the schedules such that the answering machines are never enabled at the same time.

Instructions: Configuring the Answering Machine

1. Open the user interface; [see page 52](#).
2. Select "Telephony / Answering Machine".
3. For instructions, open the online help .

Operating the Answering Machine with Devices in the Home Network

You can operate the answering machine with the following devices:

- With your FRITZ!Fon. Comprehensive instructions are presented in the latest FRITZ!Fon manual at en.avm.de/service/manuals.
- By voice menu using any connected telephone. For more information, see [page 221](#).
- By pressing a button on your FRITZ!DECT 440. Comprehensive instructions on how to configure the buttons are presented in the latest FRITZ!DECT manual at en.avm.de/service/manuals.

Picking Up a Call from the Answering Machine on the Telephone

Calls that have already been accepted by the answering machine can be picked up on your telephone. For more information, see [page 223](#).

Instructions: Listening to the Answering Machine via Remote Playback

If you enabled remote playback in the configuration of the answering machine, then you can listen to an enabled answering machine from on the go:

1. Call your telephone line.
2. When the answering machine answers: Press the * (star) key on the telephone and then enter the remote playback PIN.
3. Follow the voice menu.

Configuring Call Diversion

Overview

You can configure call diversion for incoming calls in the FRITZ!Box.

Incoming Calls

Call diversion can be set up for the following calls:

- All incoming calls
- All calls from a certain telephone number or a certain person in the telephone book
- All calls without a telephone number (anonymous calls)
- For multiple telephone numbers: all calls for a certain telephone number or a certain telephone

Destination Numbers


You can divert calls to:

- Another telephone number (a different telephone line or mobile telephone number)
- One of the FRITZ!Box's internal answering machines

Example

While you are on the go, calls are to be forwarded from the office to your mobile telephone.

Instructions: Configuring Call Diversion

1. Open the user interface; [see page 52](#).
2. Select "Telephony / Call Handling / Call Diversion".
3. For instructions, open the online help .

Configuring Call Blocks

Overview

In the FRITZ!Box you can block telephone numbers for outgoing and for incoming calls.

Kinds of Call Blocks

You can configure various kinds of call blocks:

Call Block for	Function
Outgoing calls	The blocked telephone number can no longer be called from the FRITZ!Box. Ranges of telephone numbers can also be blocked, for instance, mobile networks, or all telephone numbers that begin with 0180.
Incoming calls	The FRITZ!Box will not accept calls from the blocked telephone number. However, the call block only works if the caller allows transmission of their telephone number.
calls without a telephone number (anonymous calls)	The FRITZ!Box will not accept any calls from callers who suppress their telephone number.


Example 1

You would like to prevent dialing of expensive premium telephone numbers. For this you can set up a call block for outgoing calls to all telephone numbers that begin with 0900.

Example 2

You would like to block sales calls from a certain telephone number. For this you can set up a call block for incoming calls from this telephone number.

Instructions: Configuring a Call Block

1. Open the user interface; [see page 52](#).
2. Select “Telephony / Call Handling / Call Blocks”.
3. For instructions, open the online help .

Configuring Do Not Disturb



Overview

Do Not Disturb keeps a telephone from ringing at specified times. Calls you miss then appear in the FRITZ!Box call list. Do Not Disturb cannot be configured for IP telephones (connected via LAN port/Wi-Fi).

Example

You do not want your telephone to ring between 11 pm and 6 am.

Instructions: Setting Up Do Not Disturb

1. Open the user interface; [see page 52](#).
2. Select "Telephony / Telephony Devices".
3. Click on the "Edit" button  for the desired telephone.
4. Switch to the "Do Not Disturb" tab.
5. For instructions, open the online help .

Setting an Alarm


Overview

Setting an alarm will make your telephone ring at the specified time.

Example

You would like your telephone to wake you at 6:30 every morning.

Instructions: Configuring the Alarm

1. Open the user interface; [see page 52](#).
2. Select "Telephony / Alarm".
3. For instructions, open the online help .

Configuring a Dialing Rule


Overview

If you have multiple telephone numbers, you can configure dialing rules. A dialing rule determines which telephone number the FRITZ!Box uses for outgoing calls to a certain range of numbers, for instance to mobile networks or to foreign countries.

Example

You have a telephone number with which you can save on international calls. Then configure a dialing rule for international calls.

Instructions: Configuring Dialing Rules

1. Open the user interface; [see page 52](#).
2. Select “Telephony / Call Handling / Dialing Rules”.
3. For instructions, open the online help .

Reducing the Radiation of DECT Emissions

Overview

With the following settings you can reduce the radiation of DECT emissions:

- Reduce DECT field strength: Enable this setting only if you use all DECT devices in the vicinity of the FRITZ!Box. Reducing the field strength also reduces the range of the DECT radio network.
- DECT Eco: When DECT Eco is enabled, the FRITZ!Box switches off the DECT radio network as soon as all cordless telephones are in standby mode. When a call arrives or you press a key on a cordless telephone, the radio network is switched back on.

You can enable these settings individually or at the same time.

Requirements

- All registered cordless telephones support DECT Eco: Under “Telephony / DECT / Monitor” in the FRITZ!Box user interface, “DECT Eco supported” is displayed for each telephone.
- The following devices are not registered with the FRITZ!Box: FRITZ!DECT devices with an outlet switch, FRITZ!DECT Repeater, another FRITZ!Box in DECT repeater mode.

Instructions: Reducing DECT Transmission Power

1. Open the user interface; [see page 52](#).
2. Select “Telephony / DECT / Base Station”.
3. Enable the “Reduce DECT field strength” checkbox.
4. Click on “Apply”.

Instructions: Enabling DECT Eco

1. Open the user interface; [see page 52](#).
2. Select “Telephony / DECT / Base Station”.

3. Enable the checkbox "DECT Eco".
4. Select whether DECT Eco should always be enabled, or define times when DECT Eco should be switched on and off.
5. Save your settings by clicking "Apply".

Allowing Non-Encrypted DECT Connections

Overview

Some DECT repeaters from other manufacturers do not support encrypted connections. For operation of such DECT repeaters you can allow non-encrypted DECT connections.


In the default settings, the FRITZ!Box allows only authenticated and encrypted DECT connections.

Rules

The following FRITZ!Box features cannot be used if you allow non-encrypted connections:

- Registration of FRITZ!DECT Repeater or FRITZ!Box in DECT repeater mode
- DECT Eco
- HD Telephony
- With FRITZ!Fon: ring tones of your own, web radio, podcasts, background image, photos of callers and playback of music files by the FRITZ!Box media server

Instructions: Allowing Non-encrypted DECT Connections

1. Open the user interface; [see page 52](#).
2. Select "Telephony / DECT / Base Station".
3. For instructions, open the online help .

User Interface: Home Network Menu

Overview of All Devices.....	120
Managing Network Devices.....	125
Changing IPv4 Settings.....	128
Distributing IPv4 Addresses.....	131
Changing IPv6 Settings.....	133
Configuring a Static IP Route.....	135
Obtaining an IP Address Automatically.....	137
Configuring the “WAN” Connection Socket.....	139
Configuring Wake on LAN.....	141
Configuring USB Devices.....	142
Configuring and Using the Media Server.....	148
Assigning a FRITZ!Box Name.....	150

Overview of All Devices


Overview

In the “Mesh Overview” you see all devices that are attached to the FRITZ!Box or connected with the network of the FRITZ!. The overview covers the home network and the guest network.

Home Network and Mesh Wi-Fi: Overview Diagram

An overview diagram shows all devices that are physically connected to the FRITZ!Box or connected with the FRITZ!Box via Wi-Fi. The overview diagram is a helpful tool to make the device connections transparent.

What the Diagram Shows	Details
Network devices	All devices connected with the FRITZ!Box via Wi-Fi, by network cable, via VPN or via powerline: PCs, laptops, tablets, smartphones, TVs, game consoles, wireless repeaters, powerline devices, etc.
Smart Home Devices	Radiator controls, switchable sockets, controllable switches, etc.
USB devices	Storage drives, memory sticks, printers, etc.
DECT repeater	Repeaters to extend the DECT transmission range
Connection technology	The technology of the connection to the FRITZ!Box is shown for every device: <ul style="list-style-type: none"> • Wi-Fi, Ethernet cable, VPN, powerline: for network devices • DECT: for cordless telephones, Smart Home devices and DECT repeaters • USB: for USB devices

What the Diagram Shows	Details
Connection topology	Connection path of the devices to the FRITZ!Box: direct connection or via a repeater, an access point, or a powerline device
Devices in the guest network	devices that are connected with the FRITZ!Box via the guest network
Update available	The Perform update >> button for FRITZ! products indicates that a new FRITZ!OS is available.
Devices in the Mesh	Mesh enabled: the “Mesh enabled”  icon marks the devices that are configured as Mesh Repeaters.

Active Connections and Current Software Version

All devices shown in the “Home Network and Mesh Wi-Fi” diagram are also listed in the “Active Connections in the Home Network and Current Software Version” table.

The table offers the following functions:

Function	Description
Check FRITZ!OS version	For FRITZ! products, the “Update” column displays whether the FRITZ!OS installed on the FRITZ! device is the latest, or whether an update is available.
Perform FRITZ!OS update	If the “Update” column in the table indicates that a FRITZ!OS update is available, you can perform the update directly from the table.
Open a properties window for a device	The “Properties” column contains a “Details” link for each device. Clicking on this link opens the properties window for network devices. For other devices, it opens the settings page in the device’s technology area.

Prioritize Device for Internet Access

You can prioritize devices for internet access. Prioritized devices receive preferential treatment when they access the internet.

Properties and Actions	Description
Highest priority	<ul style="list-style-type: none"> On prioritized devices, all applications that access the internet are treated as real-time applications. When the internet connection is working at full capacity, a prioritized device receives preferential treatment. If multiple devices are prioritized, they are prioritized equally.
Wireless repeaters and powerline devices	Prioritized wireless repeaters and powerline devices do not pass their prioritization on to the network devices that are connected with them. The prioritization must be configured on the network devices.
Adjusting prioritization	Prioritized devices and all of their applications are added to the real-time applications under "Internet / Filters / Prioritization". There you can configure adjustments to the prioritization of the device.
Configuring prioritization	Prioritization is configured in the properties window of the device (open properties window; see page 124).

Editing the Properties of a Network Device

The properties of any network device can be viewed, and settings changed or reset, in the properties window of the given device.

You can edit the following settings:

- Name of the device in the home network

- IPv4 address in the home network: change; always assign the same IPv4 address
- Internet settings: prioritization, device block
- Wake on LAN

Instructions: Opening a Properties Window for a Device

1. Open the user interface; [see page 52](#).
2. Select “Home Network / Mesh / Mesh Overview”.
3. Select the device in the “Active Connections in the Home Network and Current Software Version” table. Click on the link.
4. Click on the “Details” link in the “Properties” column.

The window with the properties for the device opens.

Managing Network Devices

Overview

In the FRITZ!Box user interface, a table listing all network connections is shown under “Home Network / Network / Network Connections”. A network connection is an IP connection between a network device and the FRITZ!Box. By means of the table you can keep track of the network connections and all network devices. You can edit the connection properties, and add and remove network devices.




Explanation of Terms: Network and Other Terms

Term	Explanation
Network device	<p>Network devices are devices that are connected with the FRITZ!Box in one of the following ways:</p> <ul style="list-style-type: none"> • with a network cable to a LAN port on the FRITZ!Box • via Wi-Fi • via the internet with a VPN connection (see page 99)
Network	All network devices on the FRITZ!Box comprise a network.
Internet protocol (IP)	Communication within the network takes place using the internet protocol, IP for short. The internet protocol is the language that all network devices speak and understand.
IP network	A network based on the internet protocol is also known as an IP network. Connections within an IP network are known as IP connections.

Term	Explanation
Network interface	A network interface is the interface used to connect a network device with a network. This can be a wireless module for Wi-Fi connections or a network port for cabled connections.

Properties and Benefits

The table with the network connections assists you in organizing and keeping track of the IP network:

- Overview: The table offers an overview of the entire IP network of the FRITZ!Box.
- All connections: Every connection any network device has to the FRITZ!Box is displayed. A connection can be established with a network cable, via Wi-Fi, or over VPN.
- Idle connections: Connections that are currently not active are displayed.
- Only shown here: VPN connections are displayed only in this table.
- Guest network overview: Connections to the guest network are displayed.
- Connection properties: Properties are displayed for every connection.
- Find devices quickly:
 - Show and hide table columns: 
 - Sort table columns:  for ascending and  for descending
- Adjustable connection properties: The properties window can be opened for each connection. Connection properties can be changed in the properties window.

Add Device

You can include in the overview even network devices that are not physically connected with the FRITZ!Box.

As soon as an entry for a device is included in the table, you can configure various properties, for instance, port sharing. The type of connection is not listed in the table until the device is physically connected with the FRITZ!Box.

Example

The “Add Device” function is useful for vendors. When a customer orders a new FRITZ!Box, she or he can have the vendor set up the network in the FRITZ!Box. With the “Add Device” function this can be done without actually connecting any network devices.

Removing Devices

Unused connections can be removed individually or all at once, as long as they do not have any special settings. When a single unused connection is removed, all of the settings configured for this device are also deleted.

A click on the “Remove” button removes all inactive connections for which properties were never assigned. This function is useful in the following situations:

- in environments with walk-in customers (for example, hotels, cafés, betting offices)
- in households with children who often invite their friends to use the Wi-Fi

Changing IPv4 Settings

Overview

The IPv4 settings define the IPv4 network of the FRITZ!Box. Without these settings there is no IPv4 network. In the FRITZ!Box an IPv4 network is the default setting. The preconfigured IPv4 network is identical in all FRITZ!Boxes. You can change the IPv4 settings.



Changes to the IPv4 settings can have the result that the FRITZ!Box can no longer be reached. Make changes in this menu only if you are proficient in network technology.

Application Example

In the following cases it is necessary to change the IPv4 address of the FRITZ!Box:

- VPN connection: The home network of the FRITZ!Box is connected with another FRITZ!Box network via a LAN-LAN linkup.
- The FRITZ!Box is integrated in an existing FRITZ!Box network and both FRITZBoxes are operating in router mode (cascaded).

In both cases the FRITZ!Boxes involved cannot have identical IPv4 networks.

IPv4 Factory Settings

The following values are preconfigured in the FRITZ!Box:

IPv4 Setting	Preset Value
IPv4 address of the FRITZ!Box	192.168.178.1
Subnet mask	255.255.255.0
IPv4 network address	192.168.178.0
Address range available for network devices	192.168.178.2 - 192.168.178.254
DHCP server	enabled
Address range of the DHCP server	192.168.178.20 - 192.168.178.200
Local DNS server	192.168.178.1

Reserved IPv4 Addresses

The following IPv4 addresses are reserved for certain tasks and cannot be assigned for any other use:

IPv4 address	Purpose
192.168.178.1	IPv4 address of the FRITZ!Box
192.168.178.255	Broadcast address. This address is used to send messages within the network. The messages are received by all network devices.

IPv4 Address in Case of Emergency

The FRITZ!Box also has a fixed IPv4 address that cannot be changed.


IPv4 address	Purpose
169.254.1.1	The FRITZ!Box can always be reached at this IPv4 address.

How to use the emergency IPv4 address: [see page 241](#).

IPv4 network

IPv4: IPv4 stands for internet protocol, version 4. Together, the IPv4 address of the FRITZ!Box and the subnet mask specify the IPv4 network of the FRITZ!Box. The IPv4 address range available for the network devices is determined by this network. If either of these two values is changed, a different network results.

Instructions: Changing the IPv4 Settings

1. Open the user interface; [see page 52](#).
2. Select "Home Network / Network / Network Settings".
3. For instructions, open the online help .

Distributing IPv4 Addresses

Overview

Every network device in the IPv4 home network of the FRITZ!Box has an address from the IPv4 address range of the FRITZ!Box. Either a network device receives its IPv4 address automatically from the DHCP server of the FRITZ!Box, or you enter the IP address manually in the network settings of the network device.

IPv4 DHCP Server

DHCP stands for Dynamic Host Configuration Protocol. A DHCP server in the IPv4 network assigns IPv4 addresses to the network devices automatically. Assigning the IP addresses via the DHCP server ensures that all of the network devices connected with the FRITZ!Box are located in the same IP network.

The DHCP server of the FRITZ!Box is enabled upon delivery.

One part of the IPv4 address range of the FRITZ!Box is reserved for the DHCP server. The DHCP server assigns IP addresses from this range to the network devices.

IPv4 Addresses Reserved for the DHCP Server upon Delivery

192.168.178.20 - 192.168.178.200

You can change the address range for the DHCP server if needed:

Kind of Change	Requirement
Enlarge	If there are many network devices in the network, many IP addresses will be needed. In this case the address range of the DHCP server can be enlarged. Example for a larger range: 192.168.178.20 - 192.168.178.220
Reduce	If there are fewer network devices, the address range can be reduced. Example for a smaller range: 192.168.178.20 - 192.168.178.120

Kind of Change	Requirement
Move	If you permanently assign the IPv4 addresses 192.168.178.2 - 192.168.178.49 to network devices, but want to maintain a DHCP address range of the same size, then you can shift the DHCP address range, for instance to the range 192.168.178.50 - 192.168.178.230

Rules

- Only one DHCP server may be active in a network.

Preparing Network Devices for DHCP

For the IP address to be assigned by the DHCP server, the “Obtain an IP address automatically” option must be enabled in the IPv4 settings of the network devices; [see page 137](#).

When a network device registers with the FRITZ!Box, it receives an IPv4 address from the DHCP server. Every time the network device is restarted, the DHCP server assigns it an IP address again.

Always Assign the Same IPv4 Address

You can specify that the DHCP server always assign the same IPv4 address to network devices. This option can be enabled under “Home Network / Network / Network Connections” in the detailed settings of the network devices.

Disabling the DHCP Server

You can disable the DHCP server of the FRITZ!Box.

In the following cases it is necessary to disable the DHCP server of the FRITZ!Box:

- You use a different DHCP server in your home network.
- You would like to assign addresses to all of the network devices in the home network manually.

Changing IPv6 Settings

Overview

The FRITZ!Box has preconfigured IPv6 settings upon delivery. You can change these settings.

Requirements

- The “IPv6 support enabled” setting is enabled under “Internet / Account Information / IPv6” in the FRITZ!Box user interface.

Factory Settings


The following IPv6 settings are configured in the FRITZ!Box upon delivery:

IPv6 Property	Setting
Unique Local Addresses (ULA)	As long as there is no IPv6 internet connection, the FRITZ!Box assigns unique local addresses to the network devices so that they can communicate with each other.
Additional IPv6 routers in the home network	This FRITZ!Box provides the default IPv6 connection. Other IPv6 routers are disregarded.
DNSv6 server in the home network	Also announce the DNSv6 server via router advertisement.
DHCPv6 Server in the Home Network	The DHCPv6 server is enabled. Only the DNS server is announced via DHCPv6.

You can change the settings. For more information on this subject, see the online help of the FRITZ!Box.

Instructions: Changing the IPv6 Settings

1. Open the user interface; see page 52.

2. Select “Home Network / Network / Network Settings”.
3. For instructions, open the online help .

Configuring a Static IP Route

Overview

A static IP route is a description of a path to an IP subnet whose network address is not known to the FRITZ!Box.

Application Example


Static IP routes are intended for the following situation:

- In the FRITZ!Box network there is a subnet whose network address in the FRITZ!Box is unknown.
- The network devices in the subnet are to communicate with the network devices of the FRITZ!Box or access the internet via the FRITZ!Box.
- Only relevant for IPv4: The router that spans the subnet does not do NAT (Network Address Translation).


How Static IP Routes Work

IP packets whose IP destination addresses are unknown are forwarded to the internet by default. In the application described above, because the FRITZ!Box does not know the destination addresses located in the subnet, it forwards the packet to the internet. To prevent this from happening, the FRITZ!Box must know the network address of the subnet and the IP address of the interface to the subnet. These two addresses are required to configure a static route. Static IP routes are registered in the routing table.

Instructions: Configuring a Static IPv4 Route

1. Open the user interface; [see page 52](#).
2. Select “Home Network / Network / Network Settings”.
3. In the “Static Routing Table” area, click on the “IPv4 Routes” button.
4. For instructions, open the online help .

Instructions: Configuring a Static IPv6 Route

1. Open the user interface; [see page 52](#).
2. Select “Home Network / Network / Network Settings”.
3. In the “Static Routing Table” area, click on the “IPv6 Routes” button.
4. For instructions, open the online help .

Obtaining an IP Address Automatically

Overview

Network devices that are to obtain their IP address automatically by DHCP must be configured accordingly. This configuration is performed on the operating system level in the IP settings of the network devices.

Obtaining an IP Address Automatically in Windows

1. In Windows 10, click on "Start".
In Windows 8, press the Windows key and the Q key at the same time.
2. Enter "ncpa.cpl" in the search field and press Enter.
3. Click on the network connection between the computer and the FRITZ!Box with the right mouse button and select "Properties".
4. Under "This connection uses the following items", select "Internet Protocol Version 4 (TCP/IPv4)".
5. Click on the "Properties" button.
6. On the "General" tab, enable the options "Obtain an IP address automatically" and "Obtain DNS server address automatically".
7. Save with "OK".
8. Enable the options "Obtain an IP address automatically" and "Obtain DNS server address automatically" for the internet protocol version 6 (TCP/IPv6) as well.

The network device receives an IP address from the FRITZ!Box.

Obtaining an IP Address Automatically in Mac OS X

1. Select the “System Preferences” in the Apple menu.
2. In the “System Preferences” window, click on “Network”.
3. In the “Network” window, select the “Ethernet” entry from the “Show:” list.
4. Click on the “Advanced...” button. The “TCP/IP” settings page opens. Select the “Using DHCP” option from the “Configure IPv4:” drop-down list.
5. Click on “OK”.

The network device now automatically receives an IP address from the FRITZ!Box.

Obtaining an IP Address Automatically in Linux

For comprehensive information and tips on network settings in Linux, see, for example:

www.tldp.org/HOWTO/NET3-4-HOWTO-5.html

Configuring the “WAN” Connection Socket

Overview

The “WAN” connection socket can be configured and used as a WAN port or as a LAN port.

Functions of the “WAN” Connection Socket

Configuration	Function
WAN port	<p>“WAN” is the factory setting.</p> <p>The socket functions as a WAN port. This setting is necessary if the FRITZ!Box is connected to an access device in order to connect to the internet and works as a router. This is the case when:</p> <ul style="list-style-type: none">• The FRITZ!Box is connected to a modem.• The FRITZ!Box is connected to a router. The FRITZ!Box works as a router and generates its own local network.
LAN port	<p>When the “LAN” setting is selected, the socket functions as a LAN port. This setting is necessary in the following cases:</p> <ul style="list-style-type: none">• Network devices are connected to the “WAN” socket.• The FRITZ!Box is operated via the “WAN” socket as an IP client on a router.

Instructions: Configuring the “WAN” Socket

1. Open the user interface; [see page 52](#).
2. Select “Home Network / Network”.
3. Select Network Settings.
4. Scroll to the “WAN Setting” area.
5. Select the WAN setting you need.
6. Click on “Apply”.

Configuring Wake on LAN



Overview

Wake on LAN is a function that allows a computer to be started via network adapter. Wake on LAN can be used with remote maintenance software, to eliminate the need to keep the computer switched on permanently. The FRITZ!Box supports Wake on LAN both for IPv4 and for IPv6 connections.

Requirements

- The network adapter of the computer supports Wake on LAN.
- The computer is connected with the FRITZ!Box
 - via a FRITZ!Powerline device or
 - by network cable
- For access from the internet, the computer must be in standby operation.

Instructions: Configuring Wake on LAN

1. Open the user interface; [see page 52](#).
2. Select "Home Network / Network / Network Connections / Edit Device Details ".
3. For instructions, open the online help .

Configuring USB Devices


Overview

The FRITZ!Box has a USB port to which you can connect various USB devices. All devices in the FRITZ!Box home network can use these USB devices jointly and simultaneously.

Compatible USB Devices

- USB storage media compatible with EXT2/3/4, FAT, FAT32 or NTFS
 - flash drives
 - external hard drives
 - card readers
- USB printers
- USB all-in-one printers
- USB scanners
- USB modems
 - UMTS/HSDPA dongles
 - LTE dongles
- USB hubs

Example Configuration

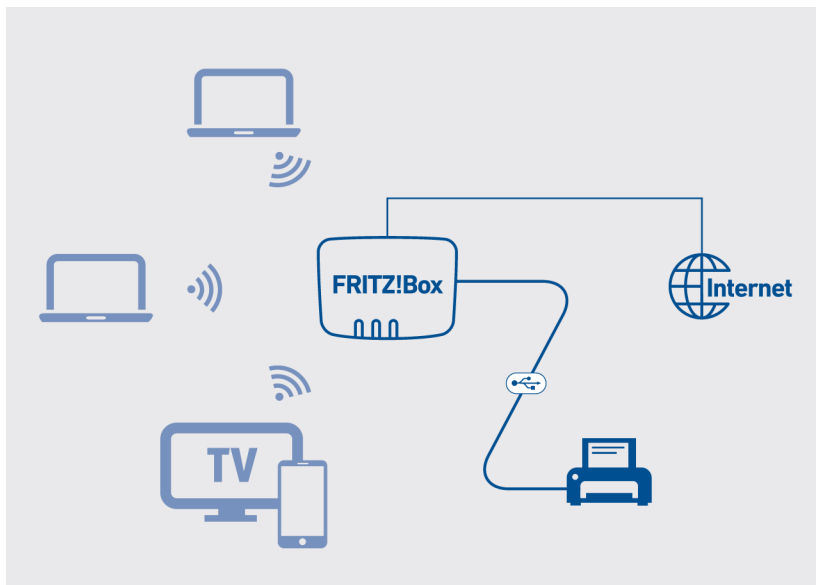

Rules

- The total current consumption may not exceed 900 mA. Otherwise errors on the USB devices and even damage to the FRITZ!Box may occur.
- UMTS modems can have very high power consumption. For this reason, do not operate a UMTS modem directly on the FRITZ!Box, but on an active hub with its own power supply.
- Do not conduct any updates for USB devices that are connected with the computer via the FRITZ!Box USB remote connection.
- The FRITZ!Box cannot protect itself from voltage peaks and drops during an electrical storm and can result in data losses on USB storage media. You should back up the contents of your USB storage media on a regular basis.
- Place USB hard drives far away from the FRITZ!Box in order to prevent interference with Wi-Fi transmission.

Instructions: Attaching and Configuring USB Storage



Click on “Remove Safely” before removing a USB storage medium from the FRITZ!Box. This ensures that all data transmission has been completed.

1. Connect the USB storage device to the USB port on the FRITZ!Box. The USB storage medium will be re-indexed and you can access the stored contents.

Configuring Access Rights for USB Storage Media

Under “System / FRITZ!Box Users” in the FRITZ!Box user interface you can specify which contents on a connected USB storage media can be accessed by each user account.

Instructions: Configuring a USB Printer as a Network Printer (Windows 8)

A USB printer connected to the FRITZ!Box can be configured as a network printer in Windows 8:

1. Press the keyboard shortcut “Windows key + X” and select “Control Panel” from the context menu.
2. Click on “Hardware and Sound” and select “Devices and Printers”.
3. In the menu bar, click on “Add a printer”.
4. In the “Add Printer” window, select “The printer that I want isn’t listed” and then “Next”.
5. Enable the option “Add a printer using TCP/IP address or hostname” and click on “Next”.
6. Enter the address <http://fritz.box> in the “Hostname or IP address” field.
If the FRITZ!Box is configured as a wireless repeater or an IP client, enter here the IP address at which the FRITZ!Box can be reached in the network.
7. Click on “Next”.
8. Click on “Next” and confirm with “Finish”.

The USB printer has been configured and can be used as a network printer.

Instructions: Configuring a USB Printer as a Network Printer (Windows 10)

A USB printer connected to the FRITZ!Box can be configured as a network printer in Windows 10:

1. Press the keyboard shortcut Windows key + i.
2. Click on “Devices” and select “Devices and Printers” in the menu.
3. Click on “Add a printer or scanner”.
The “Searching for printers and scanners” search is started.
4. Click on “The printer that I want isn’t listed.”
5. Enable the option “Add a printer using TCP/IP address or hostname” and click on “Next”.
6. Enter the address <http://fritz.box> in the “Hostname or IP address” field.
If the FRITZ!Box is configured as a wireless repeater or an IP client, enter here the IP address at which the FRITZ!Box can be reached in the network.
7. Click on “Next”.
8. If the “Printer Sharing” window appears, select “Do not share this printer” and click on “Next”.
9. Click on “Finish”

The USB printer has been configured and can be used as a network printer.

Instructions: Configuring a USB Printer as a Network Printer (Mac OS X 10.5 or Higher)

A USB printer connected to the FRITZ!Box can be configured as a network printer in Mac OS X version 10.5 or higher:

1. In the dock, click on "System preferences".
2. Click on "Print & Fax".
3. Click on "+".
4. Click on "IP Printer".
5. In the "Protocol:" list, select the entry "HP Jet Direct – Socket".
6. Enter the address "fritz.box" in the "Address" field.
If the FRITZ!Box is configured as a wireless repeater or an IP client, enter here the IP address at which it can be reached in the network.
7. In the "Use:" list, select the printer that is connected to the USB port of your FRITZ!Box.
If the printer is not displayed, you must first install the printer drivers for this device. Consult the documentation of your printer for instructions.
8. Click on "Add" or "Add Port...".

The USB printer has been configured and can be used as a network printer.

Instructions: Configuring a USB Printer in Other Operating Systems

In operating systems other than Windows or Mac OS X, configure the following settings to set up a USB printer as a network printer:

1. As the port type, select "Raw TCP".
2. Enter the port "9100".
3. Enter "fritz.box" as the printer name.
If the FRITZ!Box is configured as a wireless repeater or an IP client, enter here the IP address at which it can be reached in the network.

Configuring USB 3.0 or 2.0 Mode

In the FRITZ!Box user interface, the following settings for the USB port are located under "Home Network / USB/Storage / USB Settings":

Setting	Function
Power Mode (USB 3.0)	Full transmission capacity
Green Mode (USB 2.0)	During operation of devices with USB 3.0 <ul style="list-style-type: none">• Reduced power consumption• Reduced transmission capacity

Configuring and Using the Media Server

Overview

With the media server of the FRITZ!Box you can make photos, videos and music available to compatible playback devices. The media server can be expanded using USB storage media or USB hard disks. You can also use the media server of the FRITZ!Box to listen to web radio.


How It Works

The FRITZ!Box detects media files automatically and makes them available in a clear playlist. You can decide yourself which media sources on the media server should be made available to the users in the home network and from the internet.



Writing large amounts of data to a storage medium connected to the FRITZ!Box can take a while. You can accelerate the process by copying the data to the storage medium on your computer first and then connecting the storage medium to the FRITZ!Box.


Example Configuration

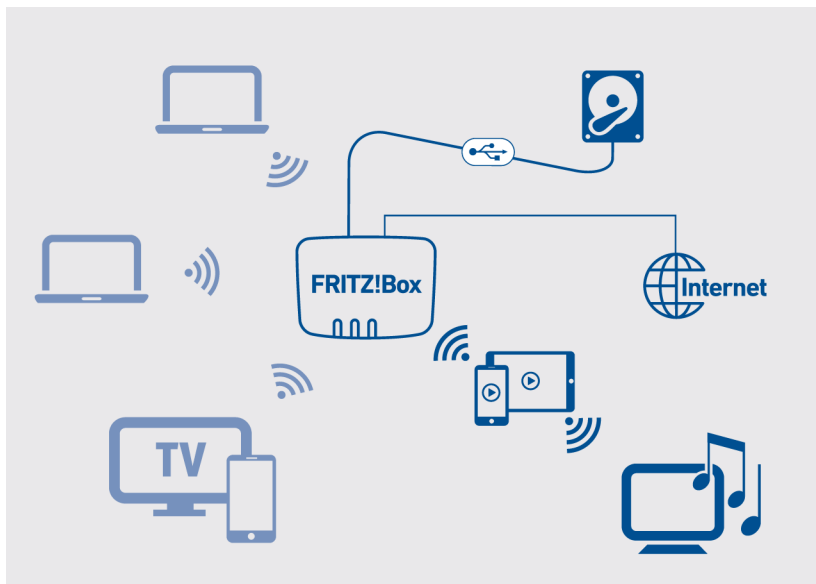

Requirements

- The playback devices must support the UPnP AV standard.

Instructions: Configuring and Using the Media Server

1. Open the user interface; see page 52.
2. Select “Home Network / Media Server / Settings”, “Home Network / Media Server / Web Radio” or “Home Network / Media Server / Podcast”.
3. For instructions, open the online help .

Assigning a FRITZ!Box Name

Overview

You can assign an individual name for your FRITZ!Box in the FRITZ!Box user interface. This name is then adopted as the name of the Wi-Fi network (SSID).




Changing the name may make it necessary to reconfigure your Wi-Fi connections and network links.

Consequences of Assigning a Name

The name is adopted in the following areas of your home network:

- Name of the Wi-Fi network (SSID)
- Name of the Wi-Fi guest network (SSID)
- Name of the working group released for home network sharing
- Name of the media server
- Name of the DECT base station
- Push service sender name
- Name of your FRITZ!Box in the device overview in MyFRITZ!

Instructions: Assigning a FRITZ!Box Name

1. Open the user interface; [see page 52](#).
2. Select "Home Network / FRITZ!Box Name".
3. For instructions, open the online help .

User Interface: Wi-Fi Menu

Switching the Wi-Fi Network On and Off.....	152
Selecting the Wi-Fi Channel.....	153
Configuring Wi-Fi Guest Access.....	154

Switching the Wi-Fi Network On and Off

Overview

When no one is using it, you can switch off the Wi-Fi network. This way you reduce both power consumption and wireless radiation.


You can switch the Wi-Fi network on and off manually, and set up a schedule for times when the Wi-Fi network is turned on and off automatically.

Switching the Wi-Fi Network On and Off Manually

You can switch the Wi-Fi network on and off in the following ways:

- in the “Home Network / Wireless” menu of a connected FRITZ!Fon cordless telephone
- in the “Convenience Features / Wireless” menu of the MyFRITZ!App
- by keypad code using a connected telephone; [see page 220](#)

Instructions: Switching the Wi-Fi Network On and Off by Schedule

1. Open the user interface; [see page 52](#).
2. Select “Wi-Fi / Schedule”.
3. For instructions, open the online help .



The FRITZ!Box schedule can be transferred to other connected AVM devices, for instance FRITZ!Repeaters and FRITZ!Powerline adapters. By default, the AVM devices adopt the settings for the wireless switching schedule from the FRITZ!Box. You can also configure a separate Wi-Fi switching schedule for the connected AVM devices.

Selecting the Wi-Fi Channel


Overview

Wi-Fi uses the frequency range around 2.4 GHz for transmission. In the default setting the FRITZ!Box automatically checks the wireless environment and selects the optimum wireless channel settings. In some cases it may be necessary to adjust the Wi-Fi channel settings.

Automatic Configuration of the Wireless Channel Settings by the FRITZ!Box

With the “Set Wi-Fi channel settings automatically” setting, the FRITZ!Box automatically searches for a channel subject to minimal interference. This process takes into consideration adjacent Wi-Fi networks and other sources of interference (for instance baby monitors, microwave ovens). Should problems with interference in the Wi-Fi network persist despite this setting, try to identify the source of interference and eliminate it.

Instructions: Adjusting the Wi-Fi Channel Settings

1. Open the user interface; [see page 52](#).
2. Select “Wi-Fi / Wi-Fi Channel”.
3. For instructions, open the online help .

Configuring Wi-Fi Guest Access

Overview

In addition to its wireless network, the FRITZ!Box can provide a second, independent wireless guest network. You can make this Wi-Fi guest network available to your guests. Then your guests can log in with the wireless guest network on their own smartphones, tablets, laptops or other network devices, without being able to access the FRITZ!Box home network.

Private Wi-Fi Guest Access and Public Wi-Fi Hotspot

The Wi-Fi guest access can be configured as a private or public hotspot.

With a private Wi-Fi guest access you can provide houseguests with an internet connection of their own. The guest access receives its own Wi-Fi network key and guest network name (SSID). You can provide the access information to your guests via QR code or print it out for them.

With a public hotspot you can make Wi-Fi access available to guests in a public space, such as a restaurant or a medical practice. The public hotspot receives its own Wi-Fi hotspot name (SSID), but remains non-encrypted so that no Wi-Fi network key is required.

The “Guest” Access Profile

Wireless devices using the private Wi-Fi guest access or the public hotspot are automatically assigned the “Guest” access profile.

Condition	Activities
Allowed	<ul style="list-style-type: none"> Surfing the web (according to your filters specified in the “Permitted websites” list or the “Blocked websites” list) Sending and receiving email
Not Allowed	<ul style="list-style-type: none"> Accessing contents of the home network Changing the Settings of the FRITZ!Box

The “Guest” access profile can be edited in the “Internet / Filters / Access Profiles” menu; [see page 89](#).

The configured filters determine which websites your guests are allowed to visit. The filters can be edited in the “Internet / Filters / Lists”; [see page 91](#).

Settings for the Wi-Fi Guest Access

You can configure the Wi-Fi guest access as a private guest access or a public hotspot.


Setting	Content and Function
FRITZ!Box push service	Notification by email about devices registering with and deregistering from your FRITZ!Box; see page 172 .
Restrict use	Guests are restricted to surfing the internet, and sending and receiving email.
Captive portal	With a captive portal you can inform guests about the terms of use you defined and then route them to your website.
Visibility in the guest network	Specify whether or not the users’ wireless devices can reach each other in the Wi-Fi guest network.

Setting	Content and Function
Switch off automatically	The Wi-Fi guest access is disabled automatically after a time range you specify, or whenever the last guest has logged off.
QR Code	The FRITZ!Box automatically generates a QR code for the wireless guest access. Then your guests can log in conveniently by scanning this code.

Switching the Wi-Fi Guest Access On and Off

- by smartphone or tablet: MyFRITZ!App (Android and iOS)
- FRITZ!Fon: Menu "Home Network / Wi-Fi"
- in the FRITZ!Box user interface
 - <http://myfritz.box> : "Convenience Features"
 - <http://fritz.box>: "Wireless / Guest Access" menu and Time Limit in the "Guest" access profile


Example Configuration

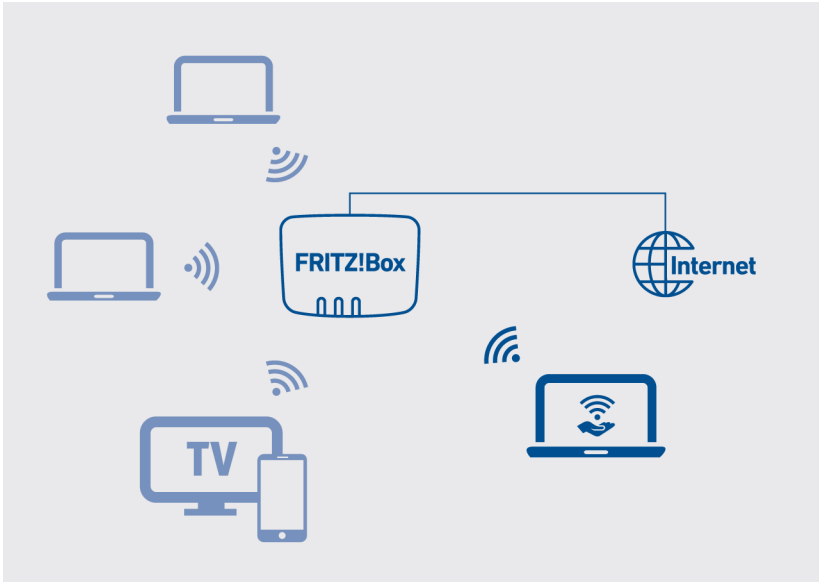

Requirements

- The FRITZ!Box is not configured as an IP client.

Instructions: Configuring Wi-Fi Guest Access

1. Open the user interface; see page 52.
2. Select "Wi-Fi / Guest Access".
3. For instructions, open the online help .

User Interface: Smart Home Menu

Smart Home Devices.....	159
Configuring a Group of Switchable Sockets and LED Lights.....	161
Setting Up a Group of Radiator Controls.....	162
Configuring a Template for Switchable Sockets and LED Lights.....	163
Configuring a Template for Radiator Controls.....	164

Smart Home Devices

Overview

With Smart Home devices you can switch the power supply to electric devices, measure their energy consumption, control your radiators, or create color lighting for every situation. In the “Smart Home” menu you can configure and operate your Smart Home devices.

Compatible Smart Home Devices

The following Smart Home devices can be registered with the FRITZ!Box via DECT radio (DECT ULE):

- up to 10 FRITZ!DECT 210/200 outlet switches
- up to 12 FRITZ!DECT 301/300 of Comet DECT radiator controls
- up to 10 FRITZ!DECT 440/400 switches
- up to 10 FRITZ!DECT 500 LED lights
- up to 10 devices from other manufacturers that support the HAN-FUN (Home Area Network FUNctional) Smart Home standard

FRITZ!DECT 210/220 Switchable Sockets

With the FRITZ!DECT 210/200 switchable sockets, you can control the power supply to lights and other electric devices, manually or by schedule. You can also measure the power consumption of these devices. You operate the sockets in the FRITZ!Box user interface, with a FRITZ!DECT 440/400 switch, with FRITZ!App Smart Home, or with a FRITZ!Fon.

FRITZ!DECT 301/300 Radiator Control

With the FRITZ!DECT 301/300 radiator controls you can control the room temperature automatically and save heating costs. In combination with a FRITZ!DECT 440/400 switch, the FRITZ!App Smart Home, or a FRITZ!Fon, you can display the measured temperature, set the normal and cool-down temperature, and change the desired temperature until the next scheduled switching point.

FRITZ!DECT 440/400 Switches

With the FRITZ!DECT 440/400 switches, you can switch and control the FRITZ!DECT 210/200 switchable sockets, the FRITZ!DECT 301/300 radiator controls, and the FRITZ!DECT 500 LED light.

With the FRITZ!DECT 440 switch you can also turn the answering machine and the Wi-Fi guest access on and off.

FRITZ!DECT 500 LED Light

FRITZ!DECT 500 is a LED light for white and color lighting. With the FRITZ!DECT 440 and 400 switches you can switch the LED light. With FRITZ!App Smart Home you can also dim the LED light and change its color. FRITZ!DECT 500 requires an E27 lighting fixture.

HAN FUN Devices


You can also connect Smart Home devices from other manufacturers to the FRITZ!Box and configure and operate them in the FRITZ!Box user interface, for instance, motion sensors and door and window contacts. The devices must support the HAN FUN (Home Area Network Functional) Smart Home standard.

Configuring a Group of Switchable Sockets and LED Lights

Overview

Using groups you can combine similar Smart Home devices to control them simultaneously. A group can contain multiple switchable sockets, LED lights, or both types of devices. The Smart Home devices can be switched on and off and controlled automatically as a group. You can configure automatic switching for a group and specify one Smart Home device that switches the entire group on and off together.

Instructions: Configuring a Group of Switchable Sockets and LED Lights


1. Open the user interface; see [page 52](#).
2. Select “Smart Home / Groups and Templates”
3. For instructions, open the online help .

Setting Up a Group of Radiator Controls

Overview

Using groups you can combine similar Smart Home devices to control them simultaneously. For a group of radiator controls, you can configure heating periods with 2 temperatures (schedule), heating periods with one temperature (vacation switching) and periods when heating is off.

Instructions: Setting Up a Group of Radiator Controls

1. Open the user interface; [see page 52](#).
2. Select “Smart Home / Groups and Templates”
3. For instructions, open the online help .

Configuring a Template for Switchable Sockets and LED Lights

Overview

In a template you can combine several groups and multiple switchable sockets and LED lights so that they are switched on and off at the same time.

Rules

- In a template you can only combine similar Smart Home devices: Either radiator controls, or switchable sockets and LED lights.


Example

You have switchable sockets and LED lights in operation in your home. In one room you have floor lamps connected to two switchable sockets, which have been configured as a group. In another room you have three different LED lights connected.

To switch all switchable sockets and LED lights, you can configure one or more templates:

- one template to enable automatic switching (schedule)
- one template to switch all sockets/LED lights on or off
- one template to delete automatic switching for the sockets/LED lights

Instructions: Configuring a Template for Switchable Sockets and LED Lamps

1. Open the user interface; [see page 52](#).
2. Select “Smart Home / Groups and Templates”
3. For instructions, open the online help .

Configuring a Template for Radiator Controls

Overview

In a template you can combine several groups and several radiator controls so that they are controlled at the same time.

Rules


- In a template you can only combine similar Smart Home devices: Either radiator controls, or switchable sockets and LED lights.

Example

You have several radiator controls operating in various rooms of your home. In one room you configured a group for several radiator controls. The other rooms have only one radiator control each. To control all radiator controls in all rooms together, you can configure one or more templates:

- one template to preheat the entire home (for instance, with boost mode or a schedule)
- one template to maintain the same temperature on all radiators while you are gone (vacation switching)
- one template to turn off all radiators

Instructions: Configuring a Template for Radiator Controls

1. Open the user interface; [see page 52](#).
2. Select “Smart Home / Groups and Templates”
3. For instructions, open the online help .

User Interface: Diagnostics Menu

Starting Function Diagnostics.....	166
Starting Security Diagnostics.....	168

Starting Function Diagnostics

Overview


With the function diagnostics you can get an overview of the functional status of your FRITZ!Box and its internet connection, and of your home network as well. In case an error occurs, the diagnostics results can help you localize and remedy any problems.

Function Diagnostics Checkpoints

Number Range	Checkpoint/Status
FRITZ!Box 4060	<ul style="list-style-type: none"> • name of the FRITZ!Box • FRITZ!Box Version • FRITZ!OS up to date
Registration	configured login method to the FRITZ!Box user interface
LAN	<ul style="list-style-type: none"> • Allocation of LAN ports • Power settings on LAN ports
Wi-Fi	<ul style="list-style-type: none"> • Wi-Fi frequency band enabled/disabled with Wi-Fi function • Number of wireless devices connected • Security settings
DECT	<ul style="list-style-type: none"> • DECT enabled/disabled • number of DECT devices connected
USB devices	<ul style="list-style-type: none"> • Number of storage media connected • Number of partitions • Connected printers

Number Range	Checkpoint/Status
Internet Connection	<ul style="list-style-type: none"> • IPv4 connection active since/not active • IPv6 connection active since/not active • Current IP address
Telephone Numbers	How many and which numbers assigned
MyFRITZ!	<ul style="list-style-type: none"> • status of MyFRITZ! activation • MyFRITZ! account email address
Home Network	<ul style="list-style-type: none"> • number of network devices connected with the FRITZ!Box at present or at an earlier point in time • number of network devices online
Smart Home	number of Smart Home devices
Wi-Fi Environment	Wi-Fi frequency band with number of Wi-Fi networks on the same or an adjacent channel

Instructions: Starting Function Diagnostics

1. Open the user interface; [see page 52](#).
2. Select "Diagnostics / Function".
3. For instructions, open the online help .

Starting Security Diagnostics

Overview

By means of the security diagnostics you get an overview of all security-relevant settings of your FRITZ!Box. At a glance you can see whether the latest FRITZ!OS is installed, which ports are open, which users are logged in or off the FRITZ!Box, which wireless devices with which properties are connected to the FRITZ!Box and much more.


Security Diagnostics Test Points

Number Range	Checkpoint/Status
FRITZ!OS	<ul style="list-style-type: none"> FRITZ!Box Version FRITZ!OS up to date
Registration	configured login method to the FRITZ!Box user interface
Internet Connection	<ul style="list-style-type: none"> Ports opened on the FRITZ!Box protocols used on these ports port sharing for home network devices to the internet Filters for internet access
MyFRITZ!	<ul style="list-style-type: none"> status of MyFRITZ! activation MyFRITZ! account email address registration link for MyFRITZ! overview of MyFRITZ! sharing for access from the internet
Outgoing filters	Overview of active filters for access from the internet

Number Range	Checkpoint/Status
Wi-Fi	<ul style="list-style-type: none"> • Properties and security-relevant settings for access to the Wi-Fi network and Wi-Fi guest access • names of registered and known wireless devices
telephony	<ul style="list-style-type: none"> • Mesh Repeater with telephony On a Mesh Repeater (FRITZ!Box) enabled for telephony in the Mesh, all of the telephone numbers configured in the Mesh Master are available. • functions and properties of the DECT base station of the FRITZ!Box • call handling like call diversion settings, premium numbers, settings for international calls and security-relevant connection settings • IP telephone settings: connected with the FRITZ!Box directly or via FRITZ!App Fon • CAPloverTCP driver function CAPI drivers install virtual modem drivers so that analog services like faxing can be used digitally. With CAPloverTCP you can use the "FRITZ!Fax for FRITZ!Box" program with the FRITZ!Box to send and receive faxes.
FRITZ!Box users	<ul style="list-style-type: none"> • all FRITZ!Box users and their rights to access FRITZ!Box contents, for the FRITZ!Box home network and for access from the internet • time at which the FRITZ!Box last logged in and the IP address it used to do so

Number Range	Checkpoint/Status
FRITZ!NAS	Access rights to the FRITZ!Box storage media with the following details: <ul style="list-style-type: none"><li data-bbox="445 256 994 320">• Which user has access to which storage media<li data-bbox="445 344 960 376">• Which rights (write and read) are included<li data-bbox="445 392 941 456">• Whether access is permitted only via the home network, or also from the internet

Instructions: Starting Security Diagnostics

1. Open the user interface; [see page 52](#).
2. Select "Diagnostics / Security".
3. For instructions, open the online help .

User Interface: System Menu

Configuring Push Services.....	172
Logging In with the User Interface as a FRITZ!Box User.....	174
Selecting Signaling of the “Info” LED.....	178
Locking and Unlocking Buttons.....	179
Setting the User Interface Language.....	180
Changing Regional Options.....	181
Adjusting the Time Zone.....	182
Saving Settings.....	183
Loading Settings.....	184
Restarting the FRITZ!Box.....	185
Restoring Factory Settings.....	186
Performing a FRITZ!OSFRITZ!OS Update Automatically.....	188
Performing a FRITZ!OS Update in the Mesh Overview.....	191
Performing a FRITZ!OS Update with the Wizard.....	193
Performing a FRITZ!OS Update Manually.....	195

Configuring Push Services

Overview

Various push services are available in the user interface under “System / Push Service”. Push services are notification services that inform you about the activities of your FRITZ!Box and assist you in saving your passwords and FRITZ!Box settings. With the push services you can have email sent to you at regular intervals informing you about the latest connections, usage and configuration of your FRITZ!Box.


Available Push Services

You can request push service mails to be notified about the following activities by the FRITZ!Box:


Push Service	Function
FRITZ!Box Info	Sends you regular email messages with data on FRITZ!Box usage and connections
Smart Home	Sends you the status of a Smart Home device regularly or when important events occur
Wi-Fi Guest Access	Sends a message whenever devices register with or deregister from the Wi-Fi guest access
Calls	Sends you email about telephone calls and calls from door intercom systems (including camera images). You have the option of receiving email for all incoming calls, or only for missed calls.
Answering machine	Forwards messages recorded on the FRITZ!Box answering machines to the specified email address
SMS reception	Forwards texts that arrive at the FRITZ!Box via the mobile network by email
New FRITZ!OS	Notifies you whenever a new FRITZ!OS version is available for your FRITZ!Box

Push service	Function
Forgot password	Sends you an access link to the specified email address if you have forgotten your password
Save settings	Saves the settings of the FRITZ!Box to a back-up file before each update and every time the factory settings are restored, and forwards this file by email, protected with a password
Change Notice	Sends you an email every time changes are made to a FRITZ!Box setting or when potentially security-relevant events occur
Current IP address	Sends the IP address assigned by the internet service provider every time the internet connection is established

Instructions: Enabling Push Service

1. Open the user interface; [see page 52](#).
2. Select "Overview / Wizards".
3. For instructions, open the online help .

Instructions: Configuring Push Service

1. Open the user interface; [see page 52](#).
2. Select "System / Push Service".
3. For instructions, open the online help .

Logging In with the User Interface as a FRITZ!Box User

Overview

When you open the user interface of your FRITZ!Box, you will be prompted to log in. This login serves to keep your FRITZ!Box secure and protects access to the user interface.

You can log in to your FRITZ!Box in the following ways:

- For the first login with the FRITZ!Box, use the FRITZ!Box password preset for your FRITZ!Box.
- After the first login, you can create one or more FRITZ!Box users. FRITZ!Box users are individual authorizations to access and use the FRITZ!Box, which are linked with individual user accounts. Every FRITZ!Box user account has a username and a password.

FRITZ!Box Password

For the first login to the FRITZ!Box, a general FRITZ!Box password is preconfigured, which works without a username. The preconfigured FRITZ!Box password is printed on the FRITZ!Box on the “ Notes” service card or on the type label on the bottom of your FRITZ!Box.

The FRITZ!Box password has the following properties:

- Login with the FRITZ!Box password without a username is possible only within the FRITZ!Box home network.
- Every user who logs in with the FRITZ!Box password without a username has the right to access all contents and settings on the FRITZ!Box.
- For the FRITZ!Box password, the FRITZ!Box automatically creates a FRITZ!Box user with a username composed of the letters “fritz” and a four-digit string of numerals, for instance, “fritz1234”. The FRITZ!Box uses this user account internally whenever you log in with the home network with the FRITZ!Box password and without a username. This automatically created user account cannot be deleted.

If you change the automatically created username, then you can no longer log in using just the FRITZ!Box password without a username. Then login is possible only with a username and password.

- You can change the preconfigured FRITZ!Box password; [see page 57](#).
- The preconfigured FRITZ!Box password is restored if you restore the factory settings to the FRITZ!Box.

FRITZ!Box users

FRITZ!Box users are individual authorizations to access and use the FRITZ!Box, which are linked with individual user accounts. A FRITZ!Box user account is set up with a username and a password.

A FRITZ!Box user account has the following properties:

- Login using a FRITZ!Box account is possible from the home network of the FRITZ!Box and, with the appropriate rights, also via the internet.
- If you create a FRITZ!Box user account for a person, then that person is granted rights to use selected areas and functions of the FRITZ!Box.
- A FRITZ!Box user does not have to be an actual person. You can create a FRITZ!Box user for the purpose of bundling certain use rights. For instance, you can create a Smart Home user who can access only Smart Home functions.
- Every FRITZ!Box user logs in with their own username and a unique password.
- You can set up as many as 18 FRITZ!Box user accounts.

You can configure the following rights for each FRITZ!Box user:

- Access the FRITZ!Box from the internet
- View and edit FRITZ!Box settings
- View and listen to voice messages, faxes and the FRITZ!App Fon call list
- Control Smart Home devices

- Access selected network storage (NAS)
- Establish a VPN connection to the FRITZ!Box

Rules for Usernames and Passwords

- For FRITZ!Box users, select a username that begins with a letter from a to z in upper or lower case and has a maximum of 32 characters; [see page 177](#).
- Select a password with at least twelve characters, which includes capitals and lower-case letters as well as numerals and special characters; [see page 177](#).
- Configure the “Forgot password” push service. When you have forgotten a password, the FRITZ!Box sends an access link to the email address you specified. Using this link you can set a new password.




If you lose your FRITZ!Box access information and did not configure the “Forgot password” push service, you will have to restore the factory settings to the FRITZ!Box and reconfigure all of your personal settings for your internet connection, your telephone system and your home network.

Characters Allowed for Passwords and Usernames

Characters	In Usernames	In Passwords
Letters of the Latin alphabet in upper case (A-Z) and in lower case (a-z)	allowed	allowed
Numerals (0-9)	allowed	allowed
Spaces	allowed	allowed
Umlauts (ä, ö, ü)	Not Allowed	Not Allowed
The letter ß	Not Allowed	Not Allowed
Currency symbols: €	Not Allowed	Not Allowed
Special characters: - _ , .	allowed	allowed
Special characters: ! " # \$ % & ' (*) + / : ; < = > ? @ [\] ^ ' { } ~	Not Allowed	allowed
Special characters: § ´	Not Allowed	Not Allowed

Instructions: Configuring FRITZ!Box Users

1. Open the user interface; [see page 52](#).
2. Select "System / FRITZ!Box Users / Users".
3. For instructions, open the online help .

Selecting Signaling of the “Info” LED

Overview

The “Info” LED signals various events. Some events are preset and configured permanently; [see page 23](#). In addition to this, the “Info” LED can be assigned to display another event of your choice.


Example 1

You would like to be notified about new messages on the answering machine. The “Info” LED flashes when there are new messages on the FRITZ!Box answering machine. The LED stops flashing as soon as all new messages have been heard.

Example 2

You would like to be notified when the data or time included in your internet package, stipulated in the “Internet / Online Monitor / Online Meter”, has been exhausted. The “Info” LED will then flash when the configured volume has been exceeded.

Instructions: Selecting the Signaling of the “Info” LED

1. Open the user interface; [see page 52](#).
2. Select “System / Buttons and LEDs / “Info” Display.”
3. For instructions, open the online help .

Locking and Unlocking Buttons

Overview

You can lock the buttons on the FRITZ!Box. Locking the buttons prevents the settings for your FRITZ!Box or your home network from being changed unintentionally or without authorization.

Instructions: Locking the FRITZ!Box Buttons

1. Open the user interface; [see page 52](#).
2. Select "System / Buttons and LEDs / Keylock".
3. Enable the checkbox "Buttons locked".
4. Click on "Apply".

The buttons are locked.

Instructions: Unlocking the FRITZ!Box Buttons

1. Open the user interface; [see page 52](#).
2. Select "System / Buttons and LEDs / Keylock".
3. Disable the "Buttons locked" checkbox.
4. Click on "Apply".

The button lock is disabled.

Setting the User Interface Language

Overview

You can change the language of the user interface. You can choose between Dutch, English, French, German, Italian, Polish, and Spanish.

Rules

- FRITZ!Fon cordless telephones automatically adopt the new language of the FRITZ!Box. You can prevent this: Within 2 minutes after you changed the language setting in the FRITZ!Box, press “Cancel” on the FRITZ!Fon.

Instructions: Setting the User Interface Language

1. Open the user interface; [see page 52](#).
2. In the “System / Region and Language” menu, select the “Language Settings” tab.
3. Select the desired language from the drop-down list.
4. Click on “Apply”.


The FRITZ!Box restarts. After restarting, the user interface appears in the language you selected.

Changing Regional Options

Overview

The FRITZ!Box is optimized to make telephone calls in various countries. With the regional options you specify the country in which you use your FRITZ!Box for telephone calls. This way you ensure that the FRITZ!Box adapts optimally to the telephony functionality of the country in which it is used.

Instructions: Changing Regional Options

1. Open the user interface; [see page 52](#).
2. Select “System / Region and Language / Regional Options”.
3. For instructions, open the online help .

Adjusting the Time Zone

Overview

By default, the FRITZ!Box automatically sets the time zone when it connects to the internet. However, you can also set the time zone where you use the FRITZ!Box manually.

If you are using the FRITZ!Box in a country with daylight saving time, you can enable the option to adjust to daylight time automatically.



For all features of the FRITZ!Box to work smoothly, the FRITZ!Box must always be set to the local time zone where it is located.

Instructions: Adjusting the Time Zone

1. Open the user interface; [see page 52](#).
2. Select "System / Region and Language / Time Zone".
3. For instructions, open the online help


Saving Settings

Overview


You can save all of the settings made in your FRITZ!Box to a backup file. Using this file you can save time on future configurations:

- You can restore the settings saved in your current FRITZ!Box.
- You can load the saved settings into a FRITZ!Box of the same model.
- You can load the saved settings into a FRITZ!Box of another model.

Instructions: Saving Settings Automatically

1. Open the user interface; [see page 52](#).
2. Select "System / Push Service / Push Services".
3. For instructions, open the online help .

Instructions: Saving Settings Manually

1. Open the user interface; [see page 52](#).
2. Select "System / Backup / Save".
3. For instructions, open the online help .

Loading Settings


Overview

FRITZ!Box settings you have previously saved can be restored.

- You can restore settings saved in your current FRITZ!Box.
- You can load the saved settings into a FRITZ!Box of the same model.
- You can load the saved settings into another FRITZ!Box of a different model.

When restoring your FRITZ!Box settings, you can choose whether to restore all settings, or only certain selected ones.

Instructions: Loading Settings

1. Open the user interface; [see page 52](#).
2. Select "System / Backup / Restore".
3. For instructions, open the online help .

Restarting the FRITZ!Box

Overview

A restart of your FRITZ!Box may be necessary if the FRITZ!Box no longer reacts correctly, or if internet connections can no longer be established for no apparent reason. You can perform a restart directly on the FRITZ!Box or via the FRITZ!Box user interface.

Consequences of Restarting


- The FRITZ!Box is reinitialized.
- Events in the “System / Event Log” menu are deleted.
- Settings you made in the FRITZ!Box remain intact.

Instructions: Restarting the FRITZ!Box

1. Remove the power adapter of the FRITZ!Box from the electrical outlet.
2. Wait 5 seconds.
3. Plug the power adapter back into the outlet.

Restarting the FRITZ!Box takes about 2 minutes.

Instructions: Restarting the FRITZ!Box from the User Interface

1. Open the user interface; [see page 52](#).
2. Select “System / Backup / Restart”.
3. For instructions, open the online help .

Restoring Factory Settings

Overview

You can restore factory settings to the FRITZ!Box.

Application Example

Resetting makes sense in the following cases:

- You forgot the login information for your FRITZ!Box and can no longer access the FRITZ!Box user interface.
- The FRITZ!Box no longer works properly (for instance, due to improper settings)
- The FRITZ!Box is to be passed on to an outside party for repair.
- The FRITZ!Box is to be resold to another user.
- The FRITZ!Box is to be disposed of.

Consequences of Resetting

- All of the settings you made in the FRITZ!Box are deleted.
- The internal memory of the FRITZ!Box is deleted. In addition to contents on FRITZ!NAS, messages received on the answering machine and faxes are discarded.
- The network key from the factory settings will be activated again.
- The name of the Wi-Fi network (SSID) will be reset.
- The IP configuration of the factory settings will be restored.

Preparations

If you would like to restart operation of the FRITZ!Box after restoring factory settings, make the following preparations:

- Save your FRITZ!Box settings; [see page 183](#).

Instructions: Restoring Factory Settings



When the factory settings are restored, all of the settings you made in the FRITZ!Box are deleted.

1. Open the user interface; [see page 52](#).
2. In the FRITZ!Box user interface, select the “System / Backup” menu.
3. Select the “Factory Settings” tab.
4. Click on the “Load Factory Settings” button.

The FRITZ!Box is reset to its factory settings. All data are deleted.



If you intend to restart operation of the FRITZ!Box, we recommend updating the FRITZ!OS of the FRITZ!Box; [see page 191](#).

Performing a FRITZ!OSFRITZ!OS Update Automatically

Overview

The FRITZ!Box works with its own operating system: FRITZ!OS. AVM regularly makes new versions of FRITZ!OS available for your FRITZ!Box, free of charge. Updates contain further developments and often new features.

With the automatic update function of the FRITZ!Box you will never miss a software update for your FRITZ!Box and will be able to use new features right away. A new version of FRITZ!OS can contain improvements, bug fixes and important security updates, as well as significant new functions.



Always install the latest FRITZ!OS version on all FRITZ! products in your FRITZ!Box home network. This keeps your FRITZ! products up to date and ensures optimum synchronization of all devices in your home network.

Properties of Automatic Updates

In the “System / Update / Auto Update” menu you can specify when and which updates should be installed automatically, or whether you would like to be merely informed about new FRITZ!OS updates. The default setting is for notification of updates and automatic installation of all updates (level III).


The “Automatic Update” function offers you the following methods:

Procedure	Description
Level I: Notify me about new FRITZ!OS versions	<ul style="list-style-type: none"> • The FRITZ!Box indicates that a new version of FRITZ!OS is available on the “Overview” page. • You start the update yourself; see page 193.
Level II: Notify me about new versions of FRITZ!OS and install necessary updates automatically	<ul style="list-style-type: none"> • The FRITZ!Box indicates that a new version of FRITZ!OS is available on the “Overview” page. You start the update yourself; see page 193. • Updates that AVM regards as necessary for continued secure and reliable operation (for instance, security updates) will be installed automatically. • The FRITZ!Box selects a suitable time for the update, generally at night. • During installation all internet and telephony connections will be interrupted briefly.
Level III: Notify me about new versions of FRITZ!OS and install new versions automatically (recommended)	<ul style="list-style-type: none"> • The FRITZ!Box indicates that a new version of FRITZ!OS is available on the “Overview” page. • Every new version of FRITZ!OS will be installed automatically. • The FRITZ!Box selects a suitable time for the update, generally at night. • During installation all internet and telephony connections will be interrupted briefly.



The FRITZ!Box is preconfigured for automatic updates, generally at night. During installation all internet and telephone connections will be briefly interrupted. If you require a stable internet connection without interruption at night, for instance for working on servers, large downloads or updates, then select a time period that works better for you with the “Time range for updates” option in the “System / Update / Auto Update” menu of the FRITZ!Box.

Instructions: Configuring Automatic Updates


1. Open the user interface; [see page 52](#).
2. Select "System / Update / Auto Update".
3. For instructions, open the online help .

Instructions: Disabling Automatic Updates

If you do not wish to have updates installed or searched for automatically, you can disable this function.



We recommend keeping the search for updates and the automatic installation of updates enabled. This way you benefit from further developments of existing and new features for your FRITZ!Box.

1. Open the user interface; [see page 52](#).
2. Select "Internet / Account Information / AVM Services".
3. For instructions, open the online help .

Performing a FRITZ!OS Update in the Mesh Overview

Overview

The FRITZ!Box works with its own operating system: FRITZ!OS. AVM regularly makes new versions of FRITZ!OS available for your FRITZ!Box, free of charge. Updates contain further developments and often new features.

You can update the FRITZ!OS in the user interface of your FRITZ!Box, in the Mesh Overview.




Always install the latest FRITZ!OS version on all FRITZ! products in your FRITZ!Box home network. This keeps your FRITZ! products up to date and ensures optimum synchronization of all devices in your home network.

Instructions: Performing a FRITZ!OS Update in the Mesh Overview



Do not clear the connection between FRITZ!OS and the computer during a FRITZ!Box update, and do not unplug the power cord. Interrupting a FRITZ!OS update could damage your FRITZ!Box.

1. Open the user interface; [see page 52](#).
2. Select “Home Network / Mesh”.
3. When a new update is available, the “Active Connections in the Home Network and Current Software Version” table displays the “Perform update” link next to the FRITZ!Box entry.

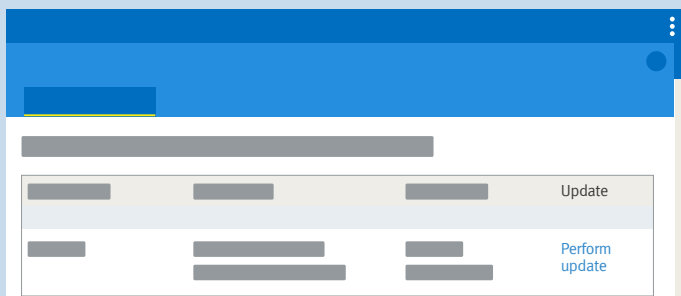

4. Start the update by clicking on "Perform update" and wait until the message "Update was successful" appears.

Performing a FRITZ!OS Update with the Wizard

Overview

The FRITZ!Box works with its own operating system: FRITZ!OS. AVM regularly makes new versions of FRITZ!OS available for your FRITZ!Box, free of charge. Updates contain further developments and often new features.

Using the “Update” wizard makes it especially easy to install a new version of FRITZ!OS. The wizard checks whether a new version of FRITZ!OS is available and guides you step by step through installation.



Always install the latest FRITZ!OS version on all FRITZ! products in your FRITZ!Box home network. This keeps your FRITZ! products up to date and ensures optimum synchronization of all devices in your home network.

Instructions: Performing a FRITZ!OS Update with the Wizard



Do not clear the connection between FRITZ!OS and the computer during a FRITZ!Box update, and do not unplug the power cord. Interrupting a FRITZ!OS update could damage your FRITZ!Box.

1. Open the user interface; [see page 52](#).
2. On the “Overview” page, select the “Wizards” menu.
3. Start the “Update” wizard.
The “System / Update / FRITZ!OS Version” page is opened.
4. Click on the “Find New FRITZ!OS” button.
The wizard checks whether a FRITZ!OS update is available for your FRITZ!Box.

If the wizard finds an update, the version number of the new FRITZ!OS is displayed. Click on the link under the FRITZ!OS version to view information about further developments and new functions contained in the FRITZ!OS update.

5. To install an update, click on the “Start Update” button.
The FRITZ!OS update begins and the “Info” LED starts flashing.
The FRITZ!OS update is complete when the LED stops flashing.

Performing a FRITZ!OS Update Manually

Overview

The FRITZ!Box works with its own operating system: FRITZ!OS. AVM regularly makes new versions of FRITZ!OS available for your FRITZ!Box, free of charge. Updates contain further developments and often new features.

In some cases it is not possible to perform an automatic update, or an update via the “Mesh Overview” or wizard. Then you have the option of performing a manual update with a FRITZ!OS file that is already saved on your computer’s hard drive, or on a storage medium connected to the computer, for instance a USB stick. No internet connection is needed for this update.



Always install the latest FRITZ!OS version on all FRITZ! products in your FRITZ!Box home network. This keeps your FRITZ! products up to date and ensures optimum synchronization of all devices in your home network.

Instructions: Performing a FRITZ!OS Update Manually



Do not clear the connection between FRITZ!OS and the computer during a FRITZ!Box update, and do not unplug the power cord. Interrupting a FRITZ!OS update could damage your FRITZ!Box.

1. Enter the following address in the web browser: <ftp.avm.de/fritzbox>.
2. Switch to the folder for your FRITZ!Box model, then to the subfolder “other”, and then to the “fritz.os” folder.
The complete model name of your FRITZ!Box is shown in the user interface on the “Overview” page and on the bottom.
3. Download the file with the file extension “.image” to your computer.
4. Open the user interface; [see page 52](#).

5. Select "System / Update / FRITZ!OS File".
6. If you did not configure the "Save settings" push service: Back up the settings on your FRITZ!Box before the update. Using this file you can restore the settings of your FRITZ!Box as needed.
 - Enable the option "Create a backup file before the update".
 - Assign a password for the encryption of your backup file.
 - Perform the additional confirmation and click on "OK".
 - Save the backup file.
7. Click on the "Browse..." button and choose the file with the new FRITZ!OS you already downloaded and saved on your computer.
8. Click on "Start Update".

The FRITZ!OS update begins and the "Info" LED starts flashing. The FRITZ!OS update is complete when the "Info" LED stops flashing.

User Interface: Wizards Menu

Using the Wizards.....	198
------------------------	-----

Using the Wizards

Overview

Wizards guide you step by step through the most important FRITZ!Box functions. All settings options are commented on in detail. Follow the wizard's instructions in each window to configure your settings.



When you cancel a wizard, any entries you made during the course of using the wizard are discarded.

Range of Functions

The following wizards assist you in step-by-step configuration:

Wizard	Function
Manage Telephony Devices	Connects and configures the following devices: <ul style="list-style-type: none"> • Cordless (DECT) telephones
Manage Telephone Numbers	Adds and edits telephone numbers
Check the Status of the FRITZ!Box	Performs diagnostics of the functional status of your FRITZ!Box, its internet connection and the home network connection to the FRITZ!Box
Security	<ul style="list-style-type: none"> • Performs diagnostics of FRITZ!Box settings that regulate access to the FRITZ!Box from the internet or in the home network • Warns about potentially insecure settings
Save and Restore Settings	To save and restore the FRITZ!Box settings

Wizard	Function
Update	Checks whether a new version of FRITZ!OS is available for your FRITZ!Box
Configuring Push Service	Sets up push services (automatic email sent with status and usage data)
More Functions in Brief	Introduces new and interesting functions, settings, and features of the FRITZ!Box

Instructions: Starting Wizards

1. Open the user interface; [see page 52](#).
2. Click on the “Wizards” menu.
3. Start the wizard of your choice with a mouse click.
4. Follow the instructions the wizard displays on the screen.

FRITZ!NAS

Using Features of FRITZ!NAS.....	201
Expanding FRITZ!Box Storage.....	203
Displaying FRITZ!Box Storage in a File Manager.....	204
Saving FRITZ!Box Storage.....	205

Using Features of FRITZ!NAS

Overview

With FRITZ!NAS you can display the data on the storage media of your FRITZ!Box in a clearly arranged interface. All participants in the FRITZ!Box home network can start FRITZ!NAS in a web browser and use it as a platform to access music, images, videos and documents in the FRITZ!Box memory.

The FRITZ!Box storage is composed of:

- internal memory
- configured online storage
- connected USB storage media

Requirements

- A web browser that supports HTML5, for instance Internet Explorer version 9 or higher, Firefox version 17 or higher, or Google Chrome version 23 or higher.
- For login from the internet:
 - A MyFRITZ! account has been set up; [see page 210](#).
 - The FRITZ!Box can be reached from the internet; [see page 208](#).
 - A FRITZ!Box user with the rights “Access from the internet allowed” and “Access to NAS contents” has been set up; [see page 175](#).

Instructions: Starting FRITZ!NAS in the Home Network

1. Open a web browser.
 2. Enter “fritz.nas” in the address bar of the browser.
 3. Log on with your FRITZ!Box using the FRITZ!Box password.
- FRITZ!NAS opens and displays the storage media enabled in the FRITZ!Box.

Instructions: Starting FRITZ!NAS in the Internet

1. Open a web browser.
2. Enter "myfritz.net" in the address field of the browser.
3. Log in with the login information of your MyFRITZ! account (email address and password).
4. Click on the name of the FRITZ!Box whose NAS storage you want to access.
5. Log in using the login information of a FRITZ!Box user with the necessary rights (username and password).
6. Click "FRITZ!NAS" in the user interface.

FRITZ!NAS opens and displays the storage media enabled in the FRITZ!Box.

Expanding FRITZ!Box Storage

Overview

The FRITZ!Box storage is composed of:


- internal memory
- Online storage
- USB Storage Media

Online storage can be configured with a provider. USB storage media can be connected to the FRITZ!Box. By combining these storage options, you can deploy the FRITZ!Box as high-performance network-attached storage.


Access Rights

Access to FRITZ!NAS and thus to the storage media of the FRITZ!Box can be protected by defining a password in the user interface. For user-oriented rights management, you can configure different FRITZ!Box users. You can set a password for each FRITZ!Box user and specify which FRITZ!NAS contents they are allowed to access.

Instructions: Configuring Online Storage

1. Open the user interface; [see page 52](#).
2. Select “Home Network / USB/Storage”.
3. For instructions, open the online help .

Instructions: Configuring USB Storage

1. Open the user interface; [see page 52](#).
2. Select “Home Network / USB/Storage / Devices and Network Sharing”.
3. For instructions, open the online help .

Displaying FRITZ!Box Storage in a File Manager

Overview

You can display the network-attached storage of your FRITZ!Box in the file manager of your computer. This section explains how.

Requirements

- Your computer is connected with the FRITZ!Box via network cable.

Instructions: Displaying FRITZ!Box Storage in Windows Explorer

1. Open Windows Explorer.
2. Enter "fritz.nas" in the address bar of the browser.

The NAS of your FRITZ!Box is displayed in Windows Explorer. You can list, rename, copy and delete files.

Instructions: Displaying FRITZ!Box Storage in the OS X Finder

1. Click on the Finder icon with the right mouse button to open the context menu of the Finder.
2. Select the "Connect to Server..." option.
3. Enter the server address <smb://fritz.nas>.

The storage of your FRITZ!Box is displayed in the Finder. You can list, rename, copy and delete files.

Saving FRITZ!Box Storage

Overview

You can save the data you have stored on the internal FRITZ!Box storage to a file.

Instructions: Saving Data from Internal Memory

1. Open FRITZ!NAS.
2. Select the data you would like to save.
3. Click in the FRITZ!NAS toolbar on the icon for downloading and select a storage location for the data.
4. Save with "OK".

The selected data are copied to a ZIP file in the download folder you specified. This concludes the saving of your data from the internal memory of the FRITZ!Box.

MyFRITZ!

What Is MyFRITZ!?	207
Creating a New MyFRITZ! Account	210
Configuring MyFRITZ!App in Android	211
Configuring MyFRITZ!App in iOS	212

What Is MyFRITZ!?

Overview

MyFRITZ! adds additional functionality to your FRITZ!Box. With MyFRITZ! you can access various information and features of your FRITZ!Box via the internet or from the home network.

MyFRITZ! Components

MyFRITZ! includes the following components:

	MyFRITZ! account / MyFRITZ!net	MyFRITZ!App	MyFRITZ! / myfritz.box
Function	MyFRITZ! in the internet	MyFRITZ! mobile	MyFRITZ! in the home network
Access to	a personal FRITZ!Box overview portal and, depending on the user rights, to FRITZ!Box functions	FRITZ!Box functions from on the go	FRITZ!Box functions in the home network
Accessed via...	login with the MyFRITZ! account on the http://www.myfritz.net website	a mobile device (with MyFRITZ!App installed)	MyFRITZ! link in the FRITZ!Box user interface or the address http://myfritz.box in the browser

Using MyFRITZ! in the internet: MyFRITZ! Account / MyFRITZ!Net

With the MyFRITZ! account you can log in to the FRITZ!Box Overview page <http://www.myfritz.net> via web browser and access your FRITZ!Box from there, for instance, to retrieve information on calls or access photo, music, or video files on home network storage. The FRITZ!Box sends important information about the home network to the email address of the MyFRITZ! account.

Create a MyFRITZ! account with an email address and a password.

FRITZ!BoxFRITZ!Box Web Address

Upon registering with the MyFRITZ! account, the FRITZ!Box is assigned a web address at which it can always be reached.

If internet access to the FRITZ!Box is enabled and a FRITZ!Box user has been configured with “Access from the internet allowed” rights, then you can access your FRITZ!Box directly with a web browser, for instance via <http://www.myfritz.net>. You can also use the address to establish VPN connections to your FRITZ!Box or server services and network devices in the home network for which you configured port sharing in the FRITZ!Box; [see page 94](#).

In the following cases, the assigned address cannot be reached from the internet:

- Your FRITZ!Box is in IP client mode, meaning that it shares the existing internet connection of another router.
- Your internet service provider did not assign a public IPv4 address to your FRITZ!Box, for instance for connections with the dual-stack lite protocol. The FRITZ!Box does not have a public IPv4 address if the message “FRITZ!Box uses a DS Lite tunnel” is displayed in the “Connections” section of the “Overview” menu in the user interface.

Using MyFRITZ! from a Mobile Device: MyFRITZ!App

With the free MyFRITZ!App you receive information from the home network directly on your mobile device. You can access your FRITZ!Box at any time from anywhere.

- Messages: view the FRITZ!Box call list and listen to messages on the answering machine
- Home network: access the FRITZ!Box user interface and connected home network devices securely
- Smart Home: Control smart plugs and radiator controls
- FRITZ!NAS: Access home network storage, for instance, for photo, music, or video files
- Convenience functions: control answering machines and call diversion settings



To use the MyFRITZ!App with iOS, a MyFRITZ! account and a FRITZ!Box user account must be configured; [see page 174](#).

Using MyFRITZ! in the Home Network: myfritz.box

Via the “MyFRITZ!” overview page at the address “myfritzbox” you can access functions of your FRITZ!Box frequently used in the home network directly from your browser:

- Call list: View calls and listen to messages
- FRITZ!NAS: Access home network storage, for instance, for photo, music, or video files
- Convenience functions: Display and switch Wi-Fi, WPS, guest access, answering machines on and off
- Smart Home: Switch and control smart plugs and radiator controls

Which functions you can access depends on the rights configured for the FRITZ!Box users logged in. If you logged in with the general FRITZ!Box password, you have access to all areas; [see page 174](#).

Creating a New MyFRITZ! Account

Overview


In order to be able to use MyFRITZ! via the <http://www.myfritz.net> website or via the MyFRITZ!App for iOS, a MyFRITZ! account is required. When the MyFRITZ! account is created, the FRITZ!Box from which the account is created is registered with the MyFRITZ! account.

If you would like to use MyFRITZ! only via the MyFRITZ!App for Android, then you do not need a MyFRITZ! account.

MyFRITZ! Account and FRITZ!Box

You only have to set up a MyFRITZ! account once. It exists no matter which FRITZ!Box was used to create it. Once an account has been created you can register any number of FRITZ!Box models with your MyFRITZ! account. If you switch to a new FRITZ!Box, you can then register the new model with your existing MyFRITZ! account and delete any old FRITZ!Box models no longer in use.

Instructions: Creating a New MyFRITZ! Account or Using an Existing MyFRITZ! Account

1. Open the user interface; [see page 52](#).
2. Select "Internet / MyFRITZ! Account".
3. For instructions, open the online help .

Configuring MyFRITZ!App in Android

Overview

With the MyFRITZ!App you can access your FRITZ!Box from anywhere using your Android device.

The MyFRITZ!App from AVM can be downloaded free from the [Google Play Store](#).

Requirements

- Android smartphone or Android tablet with Google Android 4 (or newer)
- Your Android mobile device is located in the wireless network of your FRITZ!Box.
- For registration with FRITZ!Box users: The user has “FRITZ!Box Settings” rights.
- For the connection to the home network: The “Allow access for applications” option is enabled in the “Access Settings in the Home Network” section of the “Home Network / Network / Network Settings”.

Instructions: Configuring MyFRITZ!App

1. Install the MyFRITZ!App from the Google Play Store on your mobile device.
2. Open the MyFRITZ!App.
3. If multiple FRITZ!Box models are displayed, select the FRITZ!Box you want to connect with.
4. To register with the FRITZ!Box, enter the required data.
The MyFRITZ!App connects with the FRITZ!Box.
5. To configure secure access to the FRITZ!Box user interface and the connected home network devices, tap on “Home Network” and follow the instructions for configuring the home network connection.

Configuring MyFRITZ!App in iOS

Overview

With the MyFRITZ!App you can access your FRITZ!Box from anywhere using your Apple mobile device.

The MyFRITZ!App from AVM is available for free download in the [Apple App Store](#).

Requirements

- iPhone (model 4GS or later) or iPod touch (5th generation or higher) or iPad with iOS 9.0 (or later).
- Your Apple mobile device is located in the wireless network of your FRITZ!Box.
- You configured a MyFRITZ! account and your FRITZ!Box is registered with this MyFRITZ! account.
- An account as a FRITZ!Box user has been set up for you in your FRITZ!Box, and the FRITZ!Box user has the rights “Access from the internet allowed” and “FRITZ!Box Settings”.

Instructions: Configuring MyFRITZ!App

1. Install the MyFRITZ!App on your mobile Apple device.
2. Open the MyFRITZ!App.
3. If multiple FRITZ!Box models are displayed, select the FRITZ!Box you want to connect with.
4. To register with the FRITZ!Box, enter the required data.
The MyFRITZ!App connects with the FRITZ!Box.

Controlling FRITZ!Box with Keypad Codes

Information on Keypad Codes.....	214
Configuration on the Telephone.....	216
Operating on the Telephone.....	221
Restoring Factory Settings with the Telephone.....	234

Information on Keypad Codes

Overview

Various FRITZ!Box functions can be configured and operated using a connected telephone without opening the user interface. These include not only telephony functions like the alarm, Do Not Disturb and call diversion, but also other functions. For instance, you can switch Wi-Fi on and off, and restore the factory settings to the FRITZ!Box.

How It Works

Keypad codes are combinations of keys (for instance, **#811*1***), which you enter on the telephone keypad.

Rules

- Keypad codes do not work with smartphones.
- Keypad codes do not work with FRITZ!App Fon; exception: internal calls.
- Only the following keypad codes work with IP telephones: internal calls, call transfer, using keypad sequences, suppressing telephone number once, call diversion on/off (international calls must be allowed for the IP telephone; [see page 73](#))

Entering Keypad Codes

A keypad code can contain the following characters: *****, **#**, the numerals **0** to **9**. Depending on the type of telephone, here is how to dial keypad codes:





Type of Telephone	Action
Telephone without call button	<ul style="list-style-type: none"> • Pick up the handset. • Enter the keypad code. • Hang up.

Type of Telephone	Action
Telephone with call button (usually green)	<ul style="list-style-type: none">• Enter the keypad code.• Press the “Call” (“Connect”) button.• Press the end call key.





Configuration on the Telephone

Instructions: Switching On Call Diversion for All Calls

Call diversion automatically diverts incoming calls to a previously specified external telephone number. If your telephone provider supports this, calls will be diverted by your provider and your line will remain free for other calls. Otherwise the FRITZ!Box establishes a second connection. In either case, extra charges will accrue according to your contracted telephone rates.





Telephone without Call Button	Telephone with Call Button
	
<p>Configure immediate call diversion to destination call number <DCN>:</p> <p>*21* <DCN>*#</p> <p>Configure call diversion after 20 seconds to destination call number <DCN>:</p> <p>*61* <DCN>*#</p> <p>Configure call diversion on busy to the destination call number <DCN>:</p> <p>*67* <DCN>*#</p>	
	
<p>Wait for acknowledgment tone</p>	
	

Instructions: Switching Off Call Diversion for All Calls





Telephone without Call Button	Telephone with Call Button
	
<p>Switch off immediate call diversion: *21**#</p> <p>Switch off delayed call diversion: *61**#</p> <p>Switch off call diversion on busy: *67**#</p>	
	
<p>Wait for acknowledgment tone</p>	
	

Instructions: Switching On Call Diversion for One Telephone Number

If you have multiple telephone numbers, you can configure call diversion that is applied to only one specified telephone number (TN). Calls for your other telephone numbers will not be diverted.





Telephone without Call Button	Telephone with Call Button
	
<p>Switch on immediate call diversion to destination call number <DCN>: *21* <DCN>* <TN>#</p> <p>Switch on call diversion after 20 seconds to destination call number <DCN>: *61* <DCN>* <TN>#</p> <p>Switch on call diversion on busy to the destination call number <DCN>: *67* <DCN>* <TN>#</p>	
	
<p>Wait for acknowledgment tone</p>	
	

Instructions: Switching Off Call Diversion for One Telephone Number





Telephone without Call Button	Telephone with Call Button
	
<p>Switch off immediate call diversion: *21**<TN>#</p> <p>Switch off delayed call diversion: *61**<TN>#</p> <p>Switch off call diversion on busy: *67**<TN>#</p>	
	
<p>Wait for acknowledgment tone</p>	
	

Instructions: Switching Wi-Fi On

The wireless radio network of your FRITZ!Box can be switched on and off using a connected telephone.

Telephone without Call Button	Telephone with Call Button
	
Switch Wi-Fi on: # 9 6 * 1 *	
	
Wait for acknowledgment tone	
	

Instructions: Switching Wi-Fi On and Off



Telephone without Call Button	Telephone with Call Button
	
Switch Wi-Fi off: # 9 6 * 0 *	
	
Wait for acknowledgment tone	
	

Operating on the Telephone

Instructions: Operating the Answering Machine with the Telephone

You can operate the answering machine with the telephone using a voice menu, for instance to switch the answering machine on or off and to listen to messages.

Here is how to establish a connection to the answering machine:

Telephone without Call Button	Telephone with Call Button
	
Establish a connection to the answering machine:	
**600 (answering machine 1)	
**601 (answering machine 2)	
**602 (answering machine 3)	
**603 (answering machine 4)	
**604 (answering machine 5)	
	
Follow the voice menu	

Voice Menu of the Answering Machine




Main Menu (Level 1)	Level 2	Level 3
1 Play back messages	3 Return call 5 Delete message 7 To previous message 9 To next message	

Main Menu (Level 1)	Level 2	Level 3
② Delete all messages		
③ Answering machine on/off		
④ Record a greeting	① Greeting message ② Greeting for announcement mode ③ Closing message	① Listen to all greetings, select greeting with ② ⑤ Delete greeting/announcement ⑧ Record greeting, end with ①
⑤ Enable recording/announcement mode (no messages recorded in announcement mode)		

Instructions: Picking Up a Call from the Answering Machine or Telephone



You can pick up and take the following calls on connected telephones:

- Calls that have already been accepted by an answering machine. This can be the FRITZ!Box answering machine or a connected answering machine.
- Calls that arrive at another connected telephone (the other telephone rings).

Telephone without Call Button	Telephone with Call Button
	
Press the following keys: 	
	



Instructions: Making Internal Calls

You can conduct free internal calls between connected telephones.

Telephone without Call Button	Telephone with Call Button
	
Enter an internal telephone number from the FRITZ!Box telephone book	
	

Instructions: Starting a Broadcast Call



A group call or broadcast call is an internal call that is signaled on all telephones connected with the FRITZ!Box.

Telephone without Call Button	Telephone with Call Button
	
Press the following keys for a broadcast call: * * 9	
	
All telephones on the FRITZ!Box ring. You will be connected to the telephone that picks up the call first.	

Instructions: Transferring Calls with Consultation

With the “Call Transfer” feature you can forward (transfer) a call to another telephone or to an external telephone number.



For transferring a call on a telephone without a hold button, see the manual of the telephone.

Telephone without Call Button	Telephone with Call Button
During the call with the party 1, press the hold button:	
<p>R</p> <p>The call is on hold.</p>	
Enter the telephone number of party 2. This can be an external telephone number or an internal number from the FRITZ!Box telephone book.	
When party 2 accepts the call, you can consult with others in the room.	
Connect party 1 and party 2 with each other:	
	<p>On cordless telephones:</p> <p>*4</p> <p>Others:</p> <p style="text-align: center;"></p>
<p>If party 2 cannot be reached or does not wish to speak with party 1, go back to party 1:</p> <p>R 1</p>	

Instructions: Transferring Calls without Consultation

With the Call Transfer feature you can forward (transfer) a call to another connected telephone or to an external telephone number.

For transferring a call on a telephone without a hold button, see the manual of the telephone.



Telephone without Call Button	Telephone with Call Button
During the call with the party 1, press the hold button:	
<p data-bbox="193 440 221 472">Ⓜ</p> <p data-bbox="193 491 407 520">The call is on hold.</p>	
Enter the telephone number of party 2. This can be an external telephone number or an internal number from the FRITZ!Box telephone book.	
	<p data-bbox="600 652 880 681">On cordless telephones:</p> <p data-bbox="600 699 656 727">*4</p> <p data-bbox="600 750 687 778">Others:</p> 

Instructions: Picking Up from Call Waiting

When the call waiting feature is enabled for a telephone, you are notified about incoming calls during an active telephone call. You hear a signal tone. You can accept or reject waiting calls.

Telephone without Call Button	Telephone with Call Button
During a call:	
Pick up from call waiting: R 2	
Reject waiting call: R 0	
If you pick up the waiting call, you can:	
Switch between call 1 and call 2 (alternate): R 2	
End the active call and continue the other call: Hang up, wait until your telephone rings and pick up	

Instructions: Suppressing Telephone Number Once

Telephone without Call Button	Telephone with Call Button
	
Press the following keys: * 3 1 #	
Enter the external telephone number	
	

Instructions: Setting Up a Three-Party Conference

A three-party conference call is a call with three participants. The call can be conducted with external or internal parties.

Telephone without Call Button	Telephone with Call Button
During the call with the party 1, press the hold button:	During the call with the party 1, press the hold button:
<p>R</p> <p>Call 1 is on hold.</p>	<p>R</p> <p>Call 1 is on hold.</p>
To establish the call with party 2, enter an internal or external telephone number.	To establish the call with party 2, enter an internal or external telephone number.
When party 2 accepts the call, establish the three-party conference:	When party 2 accepts the call, establish the three-party conference:
<p>R 3</p> <p>If party 2 cannot be reached, go back to party 1:</p>	<p>R 3</p> <p>If party 2 cannot be reached, go back to party 1:</p>
<p>R</p> <p>During the three-party conference call you can:</p> <p>Interrupt the conference (you speak with party 1, call 2 is on hold):</p>	<p>R</p> <p>During the three-party conference call you can:</p> <p>Interrupt the conference (you speak with party 1, call 2 is on hold):</p>
<p>R 2</p> <p>Switch back and forth between parties 1 and 2 (alternate):</p>	<p>R 2</p> <p>Switch back and forth between parties 1 and 2 (alternate):</p>
<p>Restore an interrupted conference: R 3</p> <p>End call 2 and continue with call 1: R 1</p>	<p>Restore an interrupted conference: R 3</p> <p>End call 2 and continue with call 1: R 1</p>
End the active call and continue the other call: Hang up, wait until your telephone rings and pick up	End the active call and continue the other call: Hang up, wait until your telephone rings and pick up



Instructions: Holding/Consultation/Toggling

During a telephone call you can establish a connection to another party (consultation) without ending the first call (the call is on hold). You can alternate between the two parties as often as you like.

Telephone without Call Button	Telephone with Call Button
During the call with the party 1, press the hold button:	
Ⓜ	
The call is on hold.	
To establish the call with party 2, enter an internal or external telephone number.	
When party 2 accepts the call, you can:	
Toggle back and forth between the calls: Ⓜ 2	
End the active call and continue the other call: Hang up, wait until your telephone rings and pick up	
If party 2 cannot be reached, go back to party 1:	
Ⓜ	





Instructions: Using Keypad Shortcuts

Keypad shortcuts are commands consisting of characters and numerals which you enter on the telephone. With keypad shortcuts you can control services and features in your telephone provider's network. For information about which keypad sequences you can use, contact your carrier.





Telephone without Call Button	Telephone with Call Button
	
Press the following keys (<Seq> is the keypad shortcut): *#<Seq>	
	

Instructions: Enabling an Alarm

You can use connected telephones for alarm calls. For this you can set up, enable and disable up to three alarms under "Telephony / Alarm" in the user interface. The first alarm configured can also be enabled and disabled with the telephone keys.

Telephone without Call Button	Telephone with Call Button
	
Switch on the alarm: #881**	
	
Wait for acknowledgment tone	
	

Instructions: Disabling an Alarm

Telephone without Call Button	Telephone with Call Button
	
Switch alarm off: # 8 8 1 #	
	
Wait for acknowledgment tone	
	

Restoring Factory Settings with the Telephone





Overview

You can restore factory settings to the FRITZ!Box by telephone. This is necessary, for instance, if you can no longer access the user interface of your FRITZ!Box because you've forgotten your password and did not configure the "Forgot password" push service. Then the FRITZ!Box is reset to its factory settings.

Consequences of Resetting

- All of the settings you made in the FRITZ!Box are deleted.
- The internal memory of the FRITZ!Box is deleted. Contents on FRITZ!NAS, messages on the answering machine and received faxes will be discarded.
- The preconfigured FRITZ!Box password is restored.
- The preconfigured network key and the preconfigured name of the Wi-Fi network (SSID) are reactivated.
- The preconfigured IP configuration is restored.

Instructions: Loading Factory Settings

Telephone without Call Button	Telephone with Call Button
	
Restore factory settings to FRITZ!Box: #991*15901590*	
	
Wait for acknowledgment tone	
	

Malfunctions

Troubleshooting Procedures.....	237
Troubleshooting Chart.....	238
Opening the User Interface with the Emergency IP Address.....	241
Knowledge Base.....	242
Support.....	243

Troubleshooting Procedures

Overview

The following table offers recommendations about what do when problems with your FRITZ!Box arise:

Problem	Help
<ul style="list-style-type: none"> • LEDs not on • No access to the user interface • Wi-Fi connection cannot be established or is interrupted 	Troubleshooting chart; see page 238
Problem with: <ul style="list-style-type: none"> • Connecting • Configure • telephony • Internet • Wi-Fi • etc. 	Knowledge Base; see page 242
Troubleshooting chart and Knowledge Base do not offer a solution	Support, see page 243

Troubleshooting Chart

Overview

If malfunctions occur, for instance, such that you can no longer access the user interface of the FRITZ!Box, first try to solve the problems using the following tables.

Troubleshooting Chart

Problem	Cause	Solution
LEDs not on	Power supply interrupted	<ul style="list-style-type: none"> • Make sure the power supply unit is connected properly. • Try plugging in a different device to make sure that the electrical outlet is active.
Cannot establish a Wi-Fi connection	Computer's wireless adapter not ready for operation	Switch on your computer's wireless adapter. For details, consult the manual of your computer.
	Wireless radio network of the FRITZ!Box switched off	If the "WLAN" LED is off, enable Wi-Fi in the FRITZ!Box user interface. Enable one or both frequency bands in the "Wi-Fi / Wi-Fi Network" menu in the "Active Frequency Bands" area.
	Computer cannot find the wireless network of the FRITZ!Box	Enable the "Name of the radio network visible" function ("Wi-Fi / Wi-Fi Network") in the FRITZ!Box user interface.
	Incorrect network key	Enter the correct network key ("Wi-Fi / Security").

Problem	Cause	Solution
User interface does not open	Path name incorrect	Open the user interface by entering its complete address (http://fritz.box instead of fritz.box).
	FRITZ!Box has crashed	Remove the FRITZ!Box from the power mains and restart the FRITZ!Box again after about five seconds.
	Cache is full	Empty the cache of your web browser. For more information on this, see the help of your web browser.
	Proxy configuration does not allow the FRITZ!Box address	If a proxy server is enabled in your web browser, the address of the FRITZ!Box must be entered as an exception. Check your web browser settings. For more information on this, see the help of your web browser.
	Computer is not configured to obtain IP address automatically	On your computer, enable the setting "Obtain an IP address automatically" for the network adapter used to connect to the FRITZ!Box. For more information, see the documentation by the manufacturer of your operating system.
	Forgot FRITZ!Box password	Restore factory settings to the FRITZ!Box (see page 186).

Problem	Cause	Solution
	Combination of various settings in the "Internet" and "Home Network" menus.	<p>Attempt to open the user interface with the emergency IP address; see page 241.</p> <p>If this does not work, restore factory settings to the FRITZ!Box (see page 186).</p>
Wi-Fi connection interrupted	Wi-Fi connection between FRITZ!Box and wireless device interrupted	<p>Change the positions of the FRITZ!Box and the wireless devices:</p> <ul style="list-style-type: none"> • Do not set up the FRITZ!Box in the corner of a room. • Do not set up the FRITZ!Box directly next to or beneath an obstacle or a metal object (like a cabinet or radiator). • Position the FRITZ!Box and the wireless devices so that there are as few obstacles between them as possible.
	Wi-Fi channel with heavy interference	<p>Configure automatic selection of the Wi-Fi channel in the FRITZ!Box user interface.</p> <p>Then the FRITZ!Box will automatically select a Wi-Fi channel with the least interference possible ("Wi-Fi / Wi-Fi Channel").</p>

Opening the User Interface with the Emergency IP Address

Overview

The FRITZ!Box has an emergency IP address at which the user interface can always be reached.

Information on the Emergency IP Address

- The emergency IP address is: 169.254.1.1
- The emergency IP address cannot be changed.

Requirements

- The computer with which the user interface was opened using the emergency IP address is connected with the FRITZ!Box by network cable.
- This computer is not connected with the FRITZ!Box via LAN guest access.

Instructions: Opening the User Interface with the Emergency IP Address

1. Disconnect the FRITZ!Box from other network devices and make sure that there is no Wi-Fi connection between your computer and the FRITZ!Box.
2. Restart your computer.
3. Open a web browser and enter the emergency IP address "169.254.1.1".
4. Log in to the FRITZ!Box user interface.

Knowledge Base

Overview

Help for resolving problems with the FRITZ!Box is provided in the AVM Knowledge Base. This resource presents answers to the questions asked most frequently of our Support team.

If the problem cannot be resolved using the Knowledge Base, then contact the Support team; [see page 243](#).

AVM Knowledge Base

The AVM Knowledge Base is available online at:

en.avm.de/service

Support

Overview

The Support team assists you in resolving any problems with your FRITZ! products.

Preparations

Keep the following device information handy:

- Model
- Serial number
- FRITZ!OS Version
- Country
- Internet service provider
- Information on the operating system, network (LAN or Wi-Fi)
- Any error messages displayed

Instructions: Support by Email

1. Start a web browser on your terminal device.
2. Enter en.avm.de/service in the address bar of the browser.
3. Click on the product group which your FRITZ! device belongs to.
4. Click on the "Support Request" link.
5. In the next window, select from the drop-down list the model for which you need support.
6. Enter the FRITZ!OS version of your FRITZ! device, for instance "7.20".
If you do not know the FRITZ!OS version, please enter a "?".
7. Fill out the fields in the support form and then click on "Submit support request".
Our Support team will respond by email as quickly as possible.

Decommissioning and Disposal

Decommissioning.....	245
Disposal.....	246

Decommissioning

Deleting Private Data



As the final user of a FRITZ! product, you are responsible for deleting your own personalized data on devices to be disposed of.


Delete your personal settings and personalized data from your FRITZ!Box device before ending its operation and disposing of the device. To do this, restore the factory settings to the FRITZ!Box; [see page 186](#).

Disposal

Disposal of Electronic Devices and Electronic Components

In accordance with European regulations, the FRITZ! device, and devices and electronic components contained in the package, may not be disposed with household waste, residual waste, or the yellow recycling bin.

Bring your FRITZ! device and all electronic components included with delivery to a collection point in your local community for the disposal of electronic appliances where it can be disposed of properly. Distributors of electronic devices are also obligated to accept returns of their products free of charge.



The crossed out bin on the type label or on the housing of your FRITZ! device means that you are required by law to dispose of the electronic device separately from household waste.



Technical Specifications

Technical Specifications.....248

Technical Specifications

Device Properties

Property	Value
Dimensions (W x H x D)	approx. 81 x 170 x 210 mm
Supply voltage	230 V / 50 Hz
Wi-Fi antennas	12

Ambient Conditions

Property	Value
Operating temperature	0 °C – +40 °C
Storage temperature	-20 °C – +70 °C
Relative humidity (operation)	10% – 90%
Relative humidity (storage)	5% – 95%

Active Power

Property	Value
Maximum active power	27 W
Intermediate active power, determined with the following load: <ul style="list-style-type: none"> • WAN connection enabled • Wi-Fi on; no devices registered via Wi-Fi • DECT on; one telephone registered via DECT; no active calls 	8,1 W

Ports and Interfaces

Connected via	Interface
WAN	2.5-Gbit/s WAN port for connecting to a cable, fiber optic, or DSL modem or a router

Connected via	Interface
DECT	<p>DECT base station:</p> <ul style="list-style-type: none"> • up to 6 handsets • up to 10 FRITZ!DECT 200/210 smart plugs • up to 10 FRITZ!DECT 440/400 switches to switch/control FRITZ!DECT devices • up to 12 FRITZ!DECT 300/301/Comet DECT radiator controls • up to 10 Smart Home devices by other manufacturers with the FRITZ!Box via HAN FUN
LAN	<p>3 LAN ports via RJ45 sockets</p> <ul style="list-style-type: none"> • LAN 1 - LAN 3: standard Ethernet, 10/100/1000 Base-T, 1 Gbit/s
USB	<p>1 USB host controller (USB version 3.0)</p>
Wi-Fi – 2.4-GHz range	<p>Wireless access point with support for Wi-Fi networks in the 2.4-GHz range</p> <p>Wi-Fi standards supported:</p> <ul style="list-style-type: none"> • IEEE 802.11g (Wi-Fi 3) – for 20 MHz channel bandwidth, transmission rates of up to 54 Mbit/s • IEEE 802.11n (Wi-Fi 4) – for 40 MHz channel bandwidth, transmission rates of up to 800 Mbit/s (including 256QAM) • IEEE 802.11ax (Wi-Fi 6) – for 40 MHz channel bandwidth, transmission rates of up to 1200 Mbit/s

Connected via	Interface
Wi-Fi – 5-GHz range	<p>Wireless access point with support for Wi-Fi networks in the 5-GHz range</p> <p>Wi-Fi standards supported:</p> <ul style="list-style-type: none"> • IEEE 802.11 a – for 20 MHz channel bandwidth, transmission rates of up to 54 Mbit/s • IEEE 802.11 n (Wi-Fi 4) – for 40 MHz channel bandwidth, transmission rates of up to 800 Mbit/s • IEEE 802.11 ac (Wi-Fi 5) – for 80 MHz channel bandwidth, transmission rates of up to 1733 Mbit/s (4 x 4 streams) • IEEE 802.11 ax (Wi-Fi 6) – for 80 MHz channel bandwidth, transmission rates of up to 2400 Mbit/s (4 x 4 streams)

Wi-Fi Frequencies

Frequency	Frequency range	Max. Transmitter Power
2.4 GHz	2400 - 2483 MHz	100 mW
5 GHz	5150 - 5350 MHz	200 mW
	5470 - 5725 MHz	1000 mW

In the 5-GHz band for Wi-Fi, the range from 5150 MHz to 5350 MHz is intended only for indoor use. This restriction or requirement is effective in the countries AT, BE, BG, CY, CZ, DE, DK, EE, EL, ES, FI, FR, HR, HU, IE, IT, LT, LU, LV, MT, NL, PL, PT, RO, SE, SI, SK, UK.

DECT Radio Frequencies

Frequency	Frequency Range and Transmitter Power
DECT	<ul style="list-style-type: none"> • Frequency range: 1880 MHz – 1900 MHz • Maximum transmitter power: 250 mW

Electromagnetic Fields

The FRITZ!Box receives and transmits radio waves during operation.

- The FRITZ!Box was designed and constructed to comply with the threshold values for the exposition of radio waves recommended by the International Commission on Non-ionizing Radiation Protection (ICNIRP).
- This directive was formulated by independent scientific organizations after regular and careful evaluation of scientific studies. It includes a large safety margin in order to ensure the safety of all persons, regardless of their age and health.
- For devices mounted in a fixed position that have their own power connection, like the FRITZ!Box, compliance with the minimum distance of 20 cm defined in the ICNIRP guideline has been certified. The measurements were conducted in accordance with the European EN 50385 standard.

Audio Tones

Beep	Melody
Busy signal	500 ms tone, 500 ms pause, +/- 20 ms
Dial tone	1 s tone, 4 s pause, +/- 100 ms

Legal

Legal Notice..... 253

Legal Notice

Manufacturer's Warranty

We, AVM GmbH, Alt-Moabit 95, 10559 Berlin, as manufacturer of this original product 5 years warranty for defects to the product which are demonstrably due to faults in materials or manufacturing. Your legal rights in the case of defects for which claims can be made free of charge are not restricted by this warranty.

The warranty period begins with the date of purchase by the first end user. Compliance with the warranty period must be proven by submission of the original invoice of the first end consumer or comparable documents as well as the return of the product in question. In order to return your product, our Support team will send you a link to an "RMA form". After filling out this form you will receive an RMA number authorizing you to return the product to us. This RMA number must be clearly visible and easy to read on the outside of the package, and sufficient postage must be attached (insured shipping is recommended). The product must be dispatched within 14 days after the RMA number has been issued. The package is to be returned without the original box and accessories, packed carefully and secured for transportation. AVM accepts no liability for any damage during transport. Returns without an RMA number, packages sent freight collect or without sufficient postage, and packages without an invoice will not be processed and sent back to the sender; in such cases we reserve the right to charge a processing fee of up to 35 €.

Within the warranty period, we will remove reported defects to the product hardware which are demonstrably due to faults in materials or manufacturing. Our warranty does not cover defects which occur due to incorrect installation, improper use, non-observance of instructions in the user manual, normal wear and tear, or defects in the environment of the system (third-party hardware or software). In this case we reserve the right to return such devices without processing and will charge you a processing fee of 35 €. We may, at our discretion, repair or replace the defective product. AVM bears the costs for returning the repaired or exchanged product. Claims other than the right to the re-

removal of defects which is mentioned in these terms of warranty are not constituted. We guarantee that the software conforms with general specifications, not, however, that the software meets your individual requirements. Shipping costs will not be reimbursed. Products to be exchanged due to a warranty claim are transferred to our ownership upon provision of the replacement product. Claims recognized under warranty entail neither an extension nor a recommencement of the warranty period. If we reject a warranty claim, this claim lapses no later than six months after being rejected by us. All claims from or in association with this warranty shall be governed by German substantive law, to the exclusion of the United Nations Convention on Contracts for the International Sale of Goods (CISG).

Legal Notice

This documentation and the software it describes (both now called “software”) are protected by copyright.



Please inform us about contents that are erroneous or no longer up to date at info@avm.de.

Software is delivered in machine-readable format only (object code format). Under all AVM intellectual property rights, AVM hereby grants licensee the non-exclusive right to use the software. Unless agreed for a limited time period, the right to use the software is for an unlimited time period. The licensee may create only one copy of the software, which may be used exclusively for backup use. Unless granted by mandatory law (including but not limited to Art. 69 German Copyright Act for decompiling), licensee shall not be entitled to modify, disassemble, reverse engineer, decompile or otherwise alter the Software in whole or in part. AVM reserves all intellectual property rights except as expressly granted herein. Licensee shall not be entitled to modify or delete alphanumeric or other identification codes on data media and shall transfer such identification codes onto any legal backup copy. Without the prior written approval of AVM, licensee shall not be entitled to transmit any information made available herein.

If licensee has received the software not for commercial purposes of resale (end user), licensee shall be obliged to transmit the right to use the software to a third party only in connection with the product license acquired together with the software from AVM. In the event that licensee transfers the right to use the software to a third party, licensee shall ensure not to grant further rights to this third party than originally granted to AVM, and licensee shall ensure to impose upon this third party the obligations of the present license terms. In such case, licensee shall not withhold any backup copy. Licensee shall not be entitled to grant sublicenses. In the event licensee transmits the software to a third party, licensee shall be responsible for and shall release AVM insofar from the compliance of export control laws and obligations.

If and insofar AVM provides software for which AVM is only granted a derived right to use (third party software), the license terms for such third party software shall additionally apply and prevail. The licensee may distribute any software by Texas Instruments ("TI software") handed over in object code format only with the stipulation that the use of the TI software be limited under a written licensing agreement to the AVM product that was purchased together with the AVM software, and thus (aside from in the legally permitted cases) reproduction, reverse engineering, decompilation or disassembly of the TI software is prohibited. If open source software is provided, the license terms for such open source software shall additionally apply and prevail. AVM shall provide licensee with the corresponding source code of relevant open source software, if the respective license terms of the open source software include such obligation. AVM shall inform if the software contains third party software and/or open source software and make available the corresponding license terms on request.

The licensing conditions are presented in the help for the FRITZ!Box 4060 user interface under the "Legal Notice" heading.

This documentation and the software have been produced with all due care and checked for correctness in accordance with the best available technology. AVM disclaims all liability and warranties, whether express or implied, relating to this software's quality, performance or suitability for any given purpose which deviates from the performance specifications contained in the software description. AVM will not be liable for

damages arising directly or indirectly from the use of the documentation or related software, nor for incidental or consequential damages, except in case of intent or gross negligence. AVM explicitly disclaims all liability for loss of or damage to hardware, software or data in connection with direct or indirect errors or destruction, for cases of damage (including fraud cases) incurred due to deficient or incorrect configurations (including configurations that use insufficient or no password protection) over connections (including, but not limited to broadband connections like DSL, cable/DOCSIS and fiber optic, also including VoIP or SIP connections), and for any and all costs, including connection charges, related to the software supplied and its documentation or due to incorrect installations not performed by AVM.

AVM accepts no obligations to perform software service. These require a separate agreement. The information in this documentation and the software it describes are subject to change without notice for the purpose of technical improvement.

Marks: Marks like AVM, FRITZ! and FRITZ!Box (product names and logos) are protected marks owned by AVM GmbH. Microsoft, Windows and the Windows logo are marks owned by Microsoft Corporation in the USA and/or other countries. Apple, App Store, iPhone, iPod and iPad are marks owned by Apple Inc. in the USA and/or other countries. IOS is a mark owned by Cisco Technology Inc. in den USA and/or other countries. Google and Android are marks owned by Google Inc. in the USA and/or other countries. All other product and company names are trademarks of their respective owners.

Copyright



© AVM 2021. All rights reserved.

AVM Audiovisuelles Marketing
und Computersysteme GmbH

Alt-Moabit 95

D-10559 Berlin

AVM Computersysteme
Vertriebs GmbH

Alt-Moabit 95

D-10559 Berlin

AVM in the internet: en.avm.de

CE Declaration of Conformity

AVM hereby declares that the device is compliant with the
Directive 2014/53 / EU.

The full text of the EU declaration of conformity is available at
<https://en.avm.de/service/declarations>.

UKCA Declaration of Conformity

AVM hereby declares that the device is compliant with the Radio
Equipment Regulations 2017 (S.I. 2017/1206).

The full text of the UK declaration of conformity is available at
<https://en.avm.de/service/declarations>.

Index

A

access profiles	89
active power	248
adjust time zone	182
alarm	114, 232
Android smartphone	49
answering machine	108, 172, 221
AP steering	78
apps	
FRITZ!App Fon	49
MyFRITZ!App	208
auto channel (wireless LAN)	153
auto update	188
AVM services	84

B

basic configuration	55
block caller	111
blocked websites	91
broadcast call	224
busy signal	251
buttons	
functions	22
locking	179
overview	22

C

cable	
network cable	39, 42
cables	11
call block	111
call diversion	
configuring	110, 216
for all calls	216
for telephone number	218
switching off	217, 219
call forwarding	110
call waiting	72

call

answering	223
holding	230
missed	172
picking up from call waiting	227
transfer	225, 226
CE conformity declaration	257
change regional options	181
choice of location	248
cleaning	9, 14
CLIR	228
conference call	229
configuration	51, 52
configuration by telephone	213
configuration	
telephone	72
configuring	60
configuring schedule	75
configuring timer	75
configuring	
automatic update	188
internet connection	61
push services	172
schedule	152
timer	75
wizards	198
connecting	27
connecting a computer	
via network cable	42
via Wi-Fi	44
wake on LAN	141
connecting a network device	
via USB	142
connecting network devices	
IP address automatically	137
overview	125

- via network cable 42
- via Wi-Fi 44
- connecting
 - behind router 38
 - choice of location 29
 - computer 42
 - DECT telephone 47
 - hub/switch 42
 - IP telephone 48
 - mobile network 40
 - network device 42
 - on the cable modem 34
 - registering cordless telephone 47
 - smartphone 49
 - telephone 47
 - to electrical power 31
 - to the DSL modem 33
 - to the fiber optic modem 36
 - USB devices 142
- connection data 172
- connection sockets 21
- connector panel 21
- consultation 230
- contacts 105
- conventions 13
- copyright 257
- corporate info 257
- customer documentation 12
- customer service 243
- D**
- data protection 84
- data transfer 84
- data
 - push services 172
 - restoring 184
 - saving 183, 205
- declaration of CE conformity 257
- decommissioning 245
- DECT base station 17, 47
- DECT
 - encryption 118
 - radio frequencies 251
 - using repeaters 118
- deleting private data 245
- device properties 248
- DHCP server 131
- diagnostics data 84
- diagnostics
 - function 166
 - security 168
- dial tone 251
- dialing rule 115
- disposal 246
- Do Not Disturb 113
- documentation 12
- dynamic DNS 96
- E**
- ECT 225, 226
- electrical power
 - connecting 31
- email notifications 172
- emergency IP address 129, 241
- energy
 - FRITZ!Box consumption 74
 - saving 74
- F**
- factory settings 186
- FAQs 242
- features 15, 16
- filter lists for internet use 91
- firmware
 - factory settings 234
 - push service 172
 - version 52, 53
- forwarding calls 216
- FRITZ!App Fon 49
- FRITZ!Box name 150

- FRITZ!Box password 174
 - changing 57
- FRITZ!Box users 174
- FRITZ!Box web address 208
- FRITZ!NAS
 - access by computer 204
 - expanding storage 203
 - password protection 203
 - saving data 205
- FRITZ!OS
 - factory settings 186, 234
 - FRITZ!Box name 150
 - loading settings 184
 - push service 172
 - restoring settings 184
 - saving settings 183
 - updating 188, 191, 193, 195
 - version 52, 53
- FRITZ!VPN 100
- FTP 97
- FTPS 97
- function diagnostics 166
- functions 15, 16
- G**
- green mode 74
- guest access 154
 - Wi-Fi 172
- guest network
 - overview of all devices 120
- H**
- handling 29
- hazard warnings 8
- help with problems
 - Knowledge Base 12, 242
 - online help 12
 - support 243
- hibernation 152
- holding 230
- home network 17
 - overview of all devices 120
- homepage 52, 53
- hotspot (Wi-Fi) 154
 - private 154
 - public 154
- HSPA 40, 71
- HTTPS 97
- hub
 - LAN 42
 - USB 17, 142
- humidity 248
- I**
- Info LED assignment 178
- info mail 172
- instructions for use 12
- interfaces 248
- internal calls 224
- internet access
 - mobile network 40, 71
 - VDSL line 33
 - via another router 66, 68
 - via cable modem 63
 - via DSL modem 33
- Internet access
 - via DSL modem 62
- internet access
 - via fiber optic modem 64
- Internet access
 - via wireless device 69
- internet connection
 - configuring 61
 - connection information 172
 - via another router 38
 - via cable modem 34
 - via fiber optic modem 36
- internet protocol
 - version 4 128
 - version 6 101, 133

- internet router 16
- internet use
 - blocking websites 86, 89, 91
 - filter lists 91
 - prioritizing 93
 - push service 172
 - time limits 86, 89
- IP address
 - emergency IP 241
 - in Linux 138
 - in Mac OS X 138
 - in Windows 137
 - obtaining automatically 137
 - push service 173
- IP telephone 48
- iPhone 49
- IPv4 128
- IPv6 101, 133
- K**
 - keypad codes 213, 231
 - keypad shortcuts 231
 - Knowledge Base 12
- L**
 - LAN
 - connecting to 42
 - LEDs 23
 - LEDs flashing 23
 - legal notice 252, 254
 - LISP 103
 - loading factory settings
 - via user interface 186
 - with FRITZ!Fon 234
 - log files 172
 - log information 172
 - logging off of the user interface 59
 - login methods 174
 - login
 - FRITZ!Box password 174
 - FRITZ!Box user account 174
 - logout 59
- M**
 - maintenance 84
 - malfunctions 236
 - Knowledge Base 242
 - resolving errors 237
 - support 243
 - troubleshooting chart 238
 - manual 12
 - manufacturer's warranty 253
 - media server 148
 - menus in the user interface
 - Diagnostics 165
 - Home Network 119
 - Internet 83
 - Smart Home 158
 - System 171
 - Telephony 104
 - Wi-Fi 151
 - Wizards 197
 - Mesh 76, 77
 - adopting telephone numbers 82
 - telephony 82
 - mobile network 40
 - internet access 40, 71
 - MyFRITZ! 206
 - creating MyFRITZ! account 210
 - FRITZ!Box web address 208
 - in home network 209
 - MyFRITZ! account 208
 - MyFRITZ! App with Android 211
 - MyFRITZ! in the internet 208
 - MyFRITZ! mobile 208
 - MyFRITZ!App 208
 - MyFRITZ!Net 208
 - myfritz.box 209
 - using MyFRITZ! account 210
 - MyFRITZ
 - configuring MyFRITZ!App with iOS 212

N

NAS	200
network cable	39, 42
network connections	125
network key	45
network settings	
DHCP server	131
IPv4	128
IPv4 addresses	131
IPv6	101, 133
static IP route	135
notifications	172

O

offline	
update	195
online help	12
operating system	188, 191, 193, 195
operating system: FRITZ!IOS	
restoring factory settings	186
operating temperature	248
operation by telephone	213
operation requirements	26

P

package contents	11
parental controls	86
password for FRITZ!Box	174
changing	57
password forgotten	173
password protection	
forgot password	173
push service	173
password rules	176, 177
password	
characters allowed	177
forgot	176
permitted websites	91
phone number	
blocking	111
dialing rule	115

picking up	223
picking up from call waiting	227
placement	29
port sharing	94
ports	248
power consumption	248
power	
FRITZ!Box consumption	248
prioritizing internet use	93
push services	172

Q

quick guide	12
-------------------	----

R

radio frequencies	
DECT	251
radio interference	9
reassigning "Info" LED	178
recycling	246
registering DECT telephone	47
registering handset	47
remote access	
FRITZ!VPN	100
MyFRITZ!	206
VPN	97
requirements for operation	26
resetting firmware	186
resolving problems	236
restarting	185
restoring	186
restoring factory settings	
via user interface	186
with FRITZ!Fon	234
restoring	
factory settings	234
FRITZ!Box settings	184
rules for password	176
rules for passwords	177

S

safety instructions	8
---------------------------	---

- saving power
 - overview74
 - potential savings74
 - reducing consumption74
 - Smart Home75
- schedule152
- security diagnostics168
- security
 - check168
 - handling29
 - info mail173
 - login174
 - password protection174
 - push services172
 - saving settings183
 - update188, 191, 193, 195
 - user account174
 - VPN97
- service243
- session ID59
- setting language180
- setting up60
- settings51
 - FRITZ!Box password174
 - FRITZ!Box users174
 - IP address129
 - loading184
 - network129, 133
 - push service173
 - restoring184
 - saving183
- setup
 - basic configuration55
 - Smart Home18
 - Smart Home devices75, 172
 - smartphone49
- software: FRITZ!OS
 - restoring factory settings186
- software
 - push service172
 - version52, 53
- speed in the home network93
- starting operation27
- static IP route135
- storage (NAS)200
- storage temperature248
- streaming148
- structure15
- support
 - by email243
 - instructions for use12
 - Knowledge Base12, 242
 - online help12
- symbols13
- T**
 - technical specifications247
 - active power248
 - ambient conditions248
 - device properties248
 - humidity248
 - interfaces248
 - ports248
 - power consumption248
 - temperature248
 - tones251
 - Wi-Fi frequencies250
 - telephone book81, 105
 - telephone call
 - broadcast call224
 - conference call229
 - diverting110, 216
 - holding230
 - missed172
 - picking up from call waiting227
 - transfer225, 226
 - telephone number
 - assigning72
 - blocking111
 - dialing rule115
 - suppressing228

- telephone system 16
- telephone
 - alarm function 114, 232
 - connecting to 16, 47
 - Do Not Disturb 113
 - keypad codes 213, 231
- telephones
 - configuring 72
- telephony in Mesh 82
- terminal devices
 - configuring 72
 - connecting to 16
- test
 - function diagnostics 166
 - security diagnostics 168
- three-party conference 229
- timeout 59
- tooggling 230
- tones 251
- transferring 225, 226
- troubleshooting 236
 - documentation 12
- type label 19
- U**
- UMTS 40, 71
- update
 - automatic 188
 - manual 195
 - Mesh Overview 191
 - push service 172
 - wizard 193
- usage data 172
- USB device
 - access rights 144
 - configuring 142
 - connecting 143
 - suitable for FRITZ!Box 142
- USB port 17, 147
- user account 174
- user interface 51
 - factory settings 186
 - fallback 186, 234
 - FRITZ!Box users 174
 - language setting 180
 - login to FRITZ!Box 174
 - logout 59
 - opening 52
 - password protection 174
 - remote access 97
- usernames
 - characters allowed 177
 - rules for naming 176
- V**
- voice menu of answering machine 221
- voice to mail 108
- VPN
 - remote access 99
 - service portal 100
- W**
- wake on LAN 141
- warranty 253
- Wi-Fi frequencies 250
- Wi-Fi frequency ranges 250
- Wi-Fi guest access 154, 172
 - switching on/off 156
- Wi-Fi Protected Setup 45
- Wi-Fi
 - computer 44
 - expanding a Wi-Fi network 77
 - frequencies 250
 - location for the FRITZ!Box 29
 - Mesh 76
 - network key 44, 45
 - password 45
 - reception 29
 - schedule 152
 - standards 248
 - switching on/off by button 152

switching on/off by telephone	220
Wi-Fi Channel	153
WPS	45
wireless access point	16
wireless LAN	
auto channel	153
wizard	
perform update	193
wizards	
range of functions	198
using wizards	198
WPS	45