



OK-M-65

Made for better typing, every day



User Manual

English	1
Ducky OK-M-65 Specs	1
RGB Backlit Modes	2
RGB Side Lighting Mode	2
Knob Function	3
Reset Keyboard to Factory Settings	3
Connection Function	4
Multimedia Function	5
Hotkeys Function	7
VIA Function Setting	8
繁體中文	12
Ducky OK-M-65 規格	12
RGB 背光模式	13
側邊RGB燈效	13
旋鈕功能	14
重置鍵盤至原廠設定	14
連線功能	15
多媒體功能	16
快捷鍵功能	18
VIA 功能設定	19
Ducky OK-M-65 限用物質含有情況標示聲明書&NCC警語&電池警語	23

Ducky OK-M-65

English

Model: Ducky OK-M-65 Wireless


- Type: Mechanical Keyboard
- Switch: Mechanical switches
- Keycap Material: PBT
- Printing Method: Double-Shot or Dye-Sublimation
- Country of Origin: China

OK-M-65

- Size : 336 x 119 x 40.8 mm
- Weight : 705g

For more information about the specifications and details of our keyboards, please contact the distributor in your region.

- Battery Indicator: Red light on while charging / Light off when fully charged / Red light flashing when battery is low
- Caps Lock (White Light): Uppercase - light stays on / Lowercase - light turns off
- Win Lock (White Light): On - light stays on / Off - light turns off

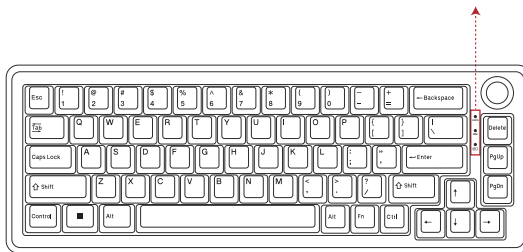

RGB Backlit Modes

Fn +	Backspace	=	Backlight effect switching
	\		Backlight color switching
	Delete		Turn all lighting on/off
	Space		Hold for 3 seconds to reset lighting modes
	↑		Increase keyboard lighting brightness (5 stages)
	↓		Decrease keyboard lighting brightness (5 stages)
	←		Decreases lighting effect speed (5 stages)
	→		Increase lighting effect speed (5 stages)

RGB Side Lighting Mode

Fn +	Enter	=	Switch side lighting effects
	; :		Decrease side lighting brightness
	' "		Increase side lighting brightness

Knob Function

Rotate left	Volume decrease
Rotate right	Volume increase
Press down	Mute

Reset keyboard to factory settings

- **Fn+C+Delete** Hold for 3 seconds Reset keyboard to factory settings

Wired mode

- Switch the connection mode selector to the **■** mode
- Connect the keyboard to a PC using the included Type-C® cable

2.4 GHz mode

- Switch the connection mode selector to the **2.4G** mode
- Connect the included 2.4 GHz wireless dongle to a PC

BT mode

- Switch the connection mode selector to the **BT** mode
- Press Fn + E/R/T to select the desired pairing host
- Press and hold FN + E/R/T for three seconds to start pairing
- Turn on the BT connection on the device
- Follow the pairing instruction on the device
- Enter the pairing passkey on the keyboard when prompted

Multimedia Function

Fn+		Win	Mac
	1	F1	
	2	F2	
	3	F3	
	4	F4	
	5	F5	
	6	F6	
	7	F7	
	8	F8	
	9	F9	
	0	F10	
	-	F11	
	=	F12	

- Fn + L. Ctrl Switch between
number keys(Esc to =) / function keys(F1-F12) / Multimedia Function

Multimedia Function

Fn+	R. Alt+		Win	Mac
		1	Decrease screen brightness	Decrease screen brightness
		2	Increase screen brightness	Increase screen brightness
		3	Switch between open windows applications	Mission control
		4	Desktop	Launchpad
		5	Back	Exposé
		6	Search	Search
		7	Previous track	Previous track
		8	Play/Pause	Play/Pause
		9	Next Track	Next Track
		0	Mute	Mute
		-	Volume decrease	Volume decrease
		=	Volume increase	Volume increase

- Fn + L. Ctrl Switch between number keys(Esc to =) / function keys(F1-F12) / Multimedia Function

Hotkeys Function

Fn+		Win	Mac
	I	PrtSc	
	O	Scroll Lock	
	P	Pause	
	WIN	Win Key Lock	
	W	W,A,S,D & direction keys switch	
	Tab	Show battery status	
	R. Ctrl	Show current connection channel	

- Hold Fn + W for 3 seconds to switch between W, A, S, D & direction keys.
- After W, A, S, D and the direction keys are successfully switched, the CAPS, WIN, and charging indicators will flash three times.
- Hold to see battery status (1 lights up = 10%, 1+2 lights up = 20%, etc.)

VIA Function Setting



Step 1. Open <https://usevia.app/>

Step 2. Click “Authorize device+” to connect the keyboard.

Step 3. The keyboard configuration appears on the screen, and you can start to configure the keyboard.

Note :


All keyboard settings must be performed in wired mode.

Keyboard settings can be configured on the VIA website or through programming.

For more details, you can find the setting information on the VIA website.

<https://www.caniusevia.com/>

Step 1. Open the Settings page and enable the Show Design Tab function.

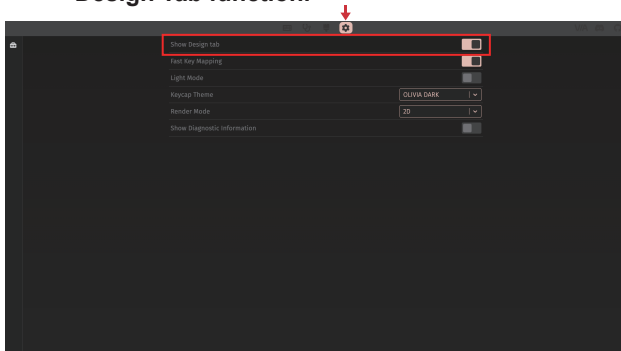


Note :

If you do not see the relevant model on the VIA page, you can download the corresponding json file from the Ducky official website to perform manual verification.

<https://ducky.global>

Step 2. Open the Design page and upload the json file of the corresponding model of the OK-M keyboard.

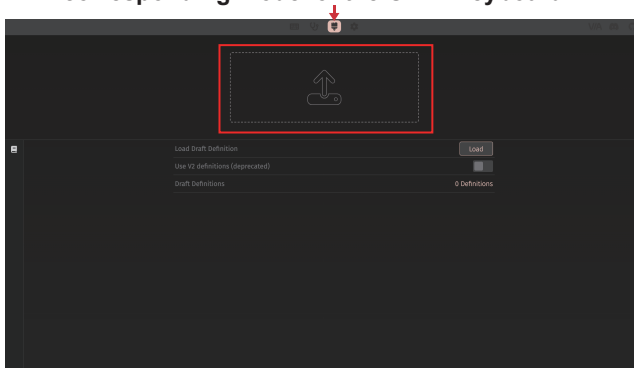

Note :

If you do not see the relevant model on the VIA page, you can download the corresponding json file from the Ducky official website to perform manual verification.

<https://ducky.global>

Step 3. Open the Configure page and start setting the OK-M keyboard function.



Note :

If you do not see the relevant model on the VIA page, you can download the corresponding json file from the Ducky official website to perform manual verification.

<https://ducky.global>

Ducky OK-M-65

繁體中文

機械式鍵盤

Model: Ducky OK-M-65 Wireless


- 結構：機械式結構
- 軸體：機械軸體
- 鍵帽材質：PBT
- 印字技術：二色成型、熱昇華
- 產地：中國

OK-M-65

- 尺寸：336 x 119 x 40.8 mm
- 重量：705g

確切規格每個地區可能會有所不同，詳細請詢問各地代理商。

- 電量指示燈：充電中亮紅燈/充滿熄滅/低電量為紅燈閃爍
- CAPS大/小寫指示燈（白燈）：大寫常亮 / 小寫熄滅
- 鎖Win鍵指示燈（白燈）：關閉常亮 / 開啟熄滅

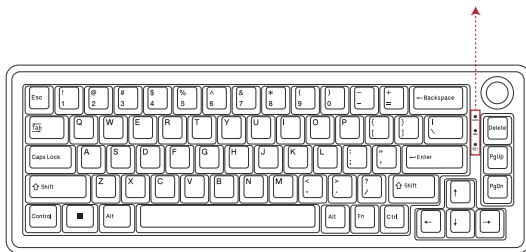

RGB 背光模式

Fn +	Backspace	=	背光效果切換
	\		背光顏色切換
	Delete		關閉/開啟所有燈光
	Space		長按3秒恢復出廠燈效
	↑		增加主燈光亮度（五個階段）
	↓		降低主燈光亮度（五個階段）
	←		降低燈光速度（五個階段）
	→		增加燈光速度（五個階段）

側邊RGB燈效

Fn +	Enter	=	側邊燈光燈效切換
	； :		降低側邊燈光亮度
	‘ ’		增加側邊燈光亮度

旋鈕功能

左旋轉	降低音量
右旋轉	增加音量
按下	靜音

重置鍵盤至原廠設定

- 長按Fn + C + Delete三秒以重置鍵盤至原廠設定

有線模式

- 將連線模式選擇開關切換至  模式
- 使用隨附的 Type-C® 連接線將鍵盤連接到 PC

2.4GHz模式

- 將連線模式選擇開關切換至 2.4G 模式
- 將隨附的 2.4 GHz 無線轉接器連接到 PC

BT模式

- 將連線模式選擇開關切換至 BT 模式
- 按 Fn + E/R/T 選擇所需的配對的主機
- 按住 Fn + E/R/T 三秒開始配對
- 開啟裝置上的 BT 連接
- 請按照裝置上的配對說明進行操作
- 出現提示時在鍵盤上輸入配對密鑰

多媒體功能

Fn+		Win	Mac
	1	F1	
	2	F2	
	3	F3	
	4	F4	
	5	F5	
	6	F6	
	7	F7	
	8	F8	
	9	F9	
	0	F10	
	-	F11	
	=	F12	

- Fn + L. Ctrl 切換數字鍵(Esc to =) / 功能鍵(F1-F12) / 多媒體鍵

多媒體功能

Fn+	R. Alt+		Win	Mac
		1	降低螢幕亮度	降低螢幕亮度
		2	提升螢幕亮度	提升螢幕亮度
		3	在開啟的視窗/應用程式間切換	任務控制
		4	桌面	啟動台
		5	返回	Exposé
		6	搜尋	搜尋
		7	上一首	上一首
		8	播放 / 暫停	播放 / 暫停
		9	下一首	下一首
		0	靜音	靜音
		-	降低音量	降低音量
		=	提升音量	提升音量

- Fn + L. Ctrl 切換數字鍵(Esc to =) / 功能鍵(F1-F12) / 多媒體鍵

快捷鍵功能

Fn+		Win	Mac
	I	PrtSc	
	O	Scroll Lock	
	P	Pause	
	WIN	Win 鍵鎖定	
	W	WASD & 方向鍵 切換	
	Tab	顯示電池狀態	
	R. Ctrl	顯示當前連接通道	

- 長按 Fn + W 三秒，可在 W、A、S、D 與方向鍵間切換。
- 切換成功後，CAPS、WIN 和充電指示燈會閃爍三次。
- 長按可查看電池狀態（1 燈亮 = 10%，1 + 2 燈亮 = 20%，依此類推）

VIA 功能設定



步驟 1: 打開 <https://usevia.app/>

步驟 2: 點擊「Authorize device+」以連接鍵盤。

步驟 3: 鍵盤配置畫面將會顯示，您現在可以開始配置鍵盤。

註：


鍵盤設定都需要在有限模式下進行

鍵盤設定可透過 VIA 網站或手動編程進行。

更多資訊請參考 VIA 官方網站：

<https://www.caniusevia.com/>


步驟 1：打開設定頁面，並開啟 Show Design Tab 功能。

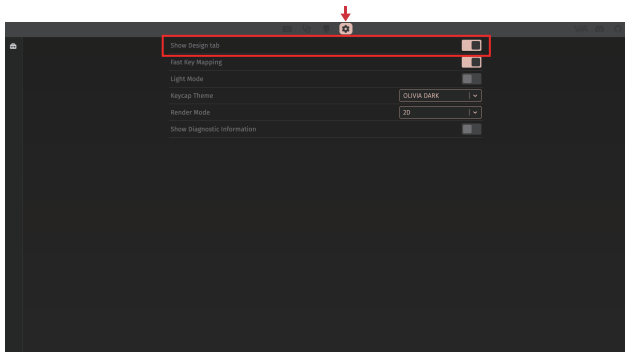

註：

若 VIA 網頁中未自動顯示您的鍵盤型號，您可前往 Ducky 官方網站下載對應的 .json 檔案，手動驗證：
<https://ducky.global>

步驟 2：進入設計頁面，並上傳與您的
OK-M 鍵盤對應的 .json 檔案。

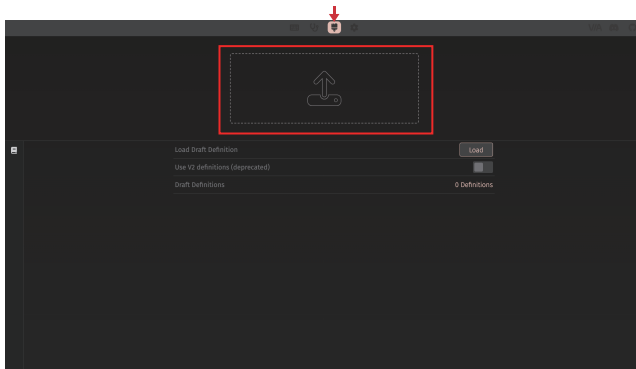

註：

若 VIA 網頁中未自動顯示您的鍵盤型號，您可前往 [Ducky 官方網站](https://ducky.global) 下載對應的 .json 檔案，手動驗證：
<https://ducky.global>.

步驟 3：開啟Configure tab，開始自訂您的 OK-M 鍵盤功能。



註：

若 VIA 網頁中未自動顯示您的鍵盤型號，您可前往 [Ducky 官方網站](https://ducky.global) 下載對應的 .json 檔案，手動驗證：
<https://ducky.global>。

限用物質含有情況標示 聲明書 NCC警語 電池警語

限用物質含有情況標示聲明書

Declaration of the Presence Condition of the Restricted Substances Marking

證書號碼／受理編號：(No.)

Certificate No./Application No.

商品標籤及商品檢驗標識：(Picture)

Product Label and Commodity Inspection Mark

樣張及其標示位置：(Description and Picture)

Sample and its location

茲切結保證所提供之商品限用物質含有情況標示內容係經執行測試

設備名稱：機械式鍵盤 Equipment name		型 Type 號 (型式)：Ducky OK-M65 Wireless designation (Type)					
單元 Unit	限用物質及其化學符號 Restricted substances and its chemical symbols						
	鉛Lead (Pb)	汞 Mercury (Hg)	鎘 Cadmium (Cd)	六價鉻 Hexavalent chromium (Cr ⁶⁺)	多溴聯苯 Polybrominated biphenyls (PBBs)	多溴二苯醚 Polybrominated diphenyl ethers (PBDEs)	
外觀	○	○	○	○	○	○	
PCB 主電路板	○	○	○	○	○	○	
USB 線材	○	○	○	○	○	○	
電子零组件	—	○	○	○	○	○	
備考1. "超出0.1 wt%"及"超出0.01 wt%"係指限用物質之百分比含量超出百分比含量基準值。 Note 1. "Exceeding 0.1 wt%" and "exceeding 0.01 wt%" indicate that the percentage content of the restricted substance exceeds the reference percentage value of presence condition.							
備考2. "○" 係指該項限用物質之百分比含量未超出百分比含量基準值。 Note 2. "○" indicates that the percentage content of the restricted substance does not exceed the percentage of reference value of presence condition.							
備考3. "—" 係指該項限用物質為排除項目。 Note 3. The "—" indicates that the restricted substance corresponds to the exemption.							

作業或採適當之品質管理措施，並備置前述相關文件，確認正確無誤後提供貴局。並同意配合貴局執行後市場管理作業所需，依商品檢驗法第49條之規定，於限期28個工作天內提供相關證明文件以供審查。

I hereby ensure that "the presence conditions of the restricted substance" provided above have been proved by testing or appropriate quality control measures, and make sure the relevant documents provided are correct and ready. Also, I agree to cooperate with BSMI, as the Article 49 of the Commodity Inspection Act stipulates, to provide the relevant documents, if needed, for verification within 28 working days when BSMI carries out the market surveillance activities.

此致 so

經濟部標準檢驗局 The Bureau of Standards, Metrology and Inspection

申請人：創傑國際股份有限公司

Applicant

負責人：俞建良

Person in charge

中華民國

DATE

114年

(year)

11月

(months)

11日

(day)

NCC警語如下：

取得審驗證明之低功率射頻器材，非經核准，公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。低功率射頻器材之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。前述合法通信，指依電信管理法規作業之無線電通信。低功率射頻器材須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。

電池警語如下：

置換可能影響安全防護的錯誤形式的電池(例：在某些鋰電池類型的情形下)；電池丟入火焰火烤箱中，或將電池作可能導致爆炸的機械擠壓或切割；電池置於可能導致爆炸或可燃性液體或氣體洩漏的高溫環境中；且電池承受可能導致爆炸或可燃性液體或氣體洩漏的極度低氣壓。



廢電池請回收



公司：創傑國際股份有限公司

網址：<https://ducky.global>

地址：台北市南港區忠孝東路七段508號3樓之3

Manufacturer : Duckychannel International Co., Ltd.

Website : <https://ducky.global>

Adresse : 3rd Floor, No. 3, 508, Section 7, Zhongxiao
East Road, Nangang District, Taipei, Taiwan

DuckyChannel

Pro Gamersware GmbH

Gaußstraße 1, 10589 Berlin, Germany

<https://ducky.global>