


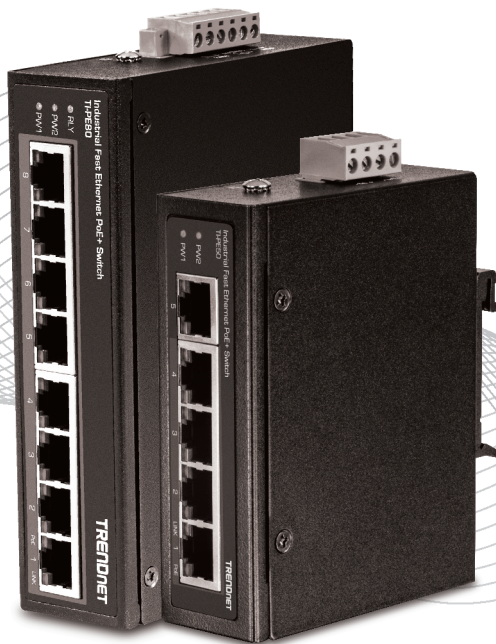

Quick Installation Guide

TI-PE50 / TI-PE80 (V1)

Table of Contents

1 English

1. Before You Start
2. Quick Reference
3. Hardware Installation

1. Before You Start


Package Contents

- TI-PE50 / TI-PE80
- Quick Installation Guide
- Removable terminal block
- DIN-rail mount
- Wall mount kit

Minimum Requirements

- Existing network
- Power Supply (TI-S12048 or TI-S24048)

2. Quick Reference

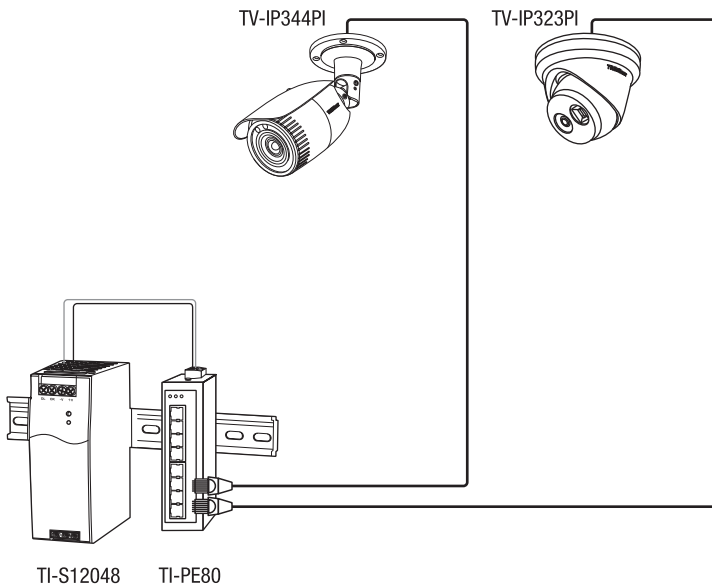


3. Hardware Installation


The switch can be placed on a desktop, wall, or mounted to a DIN-Rail.

DIN-Rail Mounting Instructions


1. Attach the DIN-rail mount bracket to the switch.

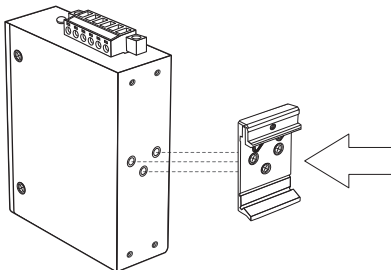

2. Position the unit in front of the DIN-Rail and hook the mount bracket over the top of the rail.
3. Rotate the unit downward towards the rail to lock it into place. You will know it is secure when you hear the click.



Mounting the unit




Releasing the unit

4. To remove the unit, pull down to clear the bottom of the DIN-Rail and rotate up, away from the rail.

Wall Mounting Instructions

1. Attach the wall mount plates to switch.
2. Mount the switch.

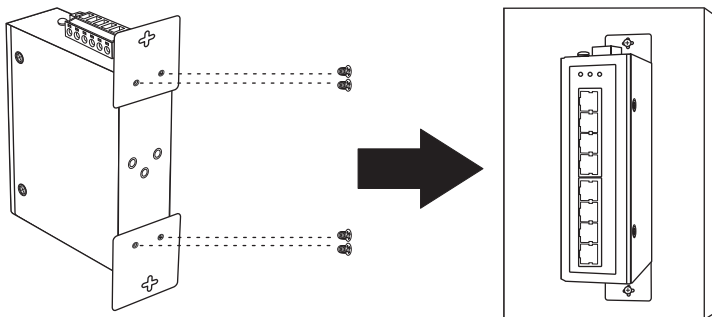

Safety Note




- Turn off the power before connecting any module or wire. The correct power supply voltage (48 - 56V DC) is listed on the product label. Check the voltage of your power source to make sure that you are using the correct part. Do NOT use voltage greater than 48 - 56V DC, the product label.
- Calculate the maximum possible current in each power wire and common wire. Observe all electrical codes dictating the maximum current allowable for each wire size. If the current surpasses the maximum ratings, the wiring could overheat, causing serious damage to your equipment.

Applying Power

1. Connect the power supply (sold separately) to the included terminal block (as shown below) and secure with the screws.

Note: Polarities must match.

2. Attach the terminal block to the unit, connect the neutral wire to the ground, and supply power to the power adapter.

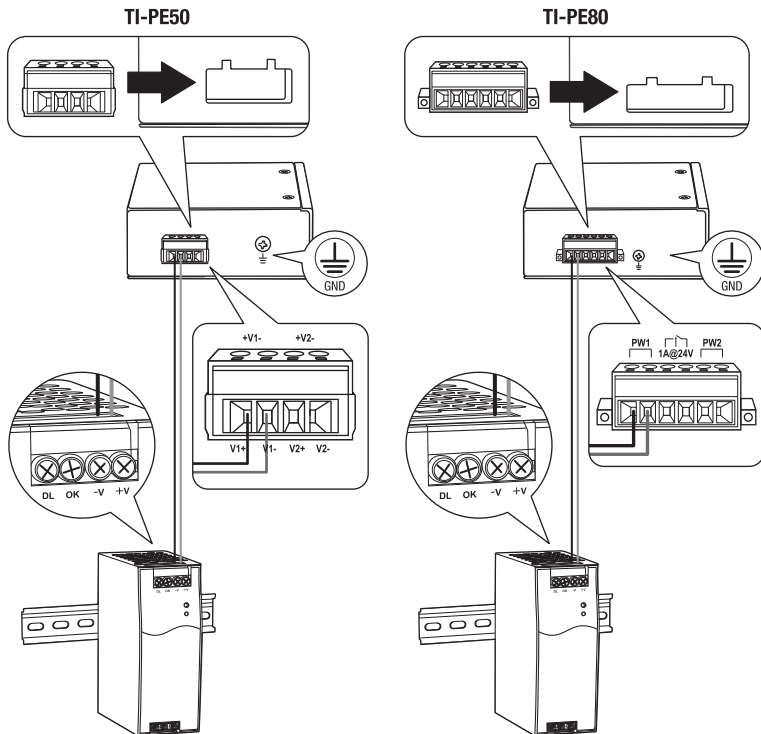

3. Connect a network source and devices to the switch. Check the LEDs to confirm the connections are established. Your installation is completed.

TI-PE50 / TI-PE80 LED Indicators

LED	Status	Description
PW1	Solid Green	Power is Connected
PW2	Solid Green	Power is Connected
RLY (TI-PE80)	Solid Amber	Connected only PW1 or PW2
Link	Solid Green	Connected
	Flashing Green	Data Transmitting / Receiving
	Off	No Connection
PoE	Solid Amber	PoE is Connected
	Off	No PoE

Declaration of Conformity

TRENDnet[®]

Manufacturer's Name and Address

TRENDnet, Inc.
20675 Manhattan Place
Torrance, CA 90501 USA

Zwolsestraat 156 2587 WB
The Hague The Netherlands



Product Information:

Model Number: TI-PE50/TI-PE80
Product Name: 5-Port Industrial Fast Ethernet PoE+ DIN-Rail Switch
8-Port Industrial Fast Ethernet PoE+ DIN-Rail Switch

Trade Name: TRENDnet

TRENDnet hereby declare that the product is in compliance with the essential requirements and other relevant provisions under our sole responsibility.

Safety LVD:

IEC 60950-1: 2005 (Second Edition) + Am 1:2009 + Am 2:2013
EN 60950-1: 2006 + A11: 2009 + A1: 2010 + A12: 2011 + A2: 2013

EMC

EMI:	EMS:
EN 55032: 2015	EN 55024: 2010/A1: 2015
EN: 61000-3-2: 2014	IEC: 61000-4-2: 2008
EN: 61000-3-3: 2013	IEC: 61000-4-3: 2006 + A1: 2007 + A2: 2010
CISPR 32: 2015	IEC: 61000-4-4: 2012
	IEC: 61000-4-5: 2014 + A1: 2017
	IEC: 61000-4-6: 2013/COR1: 2015
	IEC: 61000-4-8: 2009
	IEC: 61000-4-11: 2004 + A1: 2017

This product is herewith confirmed to comply with the Directives.

Directives: Low Voltage Directive 2014/35/EU
EMC Directive 2014/30/EU
RoHS Directive 2011/65/EU
REACH Regulation (EC) No.1907/2006

Person responsible for this declaration.

Place of Issue: Torrance, California, USA

Date: June 24, 2019

Name: Sonny Su

Title: Director of Technology

Signature: _____

A handwritten signature in black ink, appearing to be 'Sonny Su', written over a horizontal line.





Certifications

This device complies with Part 15 of the FCC Rules.

Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received.

Including interference that may cause undesired operation.



Waste electrical and electronic products must not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or Retailer for recycling advice.

Applies to PoE Products Only: This product is to be connected only to PoE networks without routing to the outside plant.

Note

The Manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. Such modifications could void the user's authority to operate the equipment.

Advertencia

En todos nuestros equipos se mencionan claramente las características del adaptador de alimentación necesario para su funcionamiento. El uso de un adaptador distinto al mencionado puede producir daños físicos y/o daños al equipo conectado. El adaptador de alimentación debe operar con voltaje y frecuencia de la energía eléctrica domiciliar existente en el país o zona de instalación.

Technical Support

If you have any questions regarding the product installation, please contact our Technical Support.

Toll free US/Canada: **1-855-373-4741**

Regional phone numbers available at www.trendnet.com/support

TRENDnet

20675 Manhattan Place
Torrance, CA 90501
USA

Product Warranty Registration

Please take a moment to register your product online. Go to TRENDnet's website at:

www.trendnet.com/register