Dell Pro Precision 5 14S

PW514260

Setup and Specifications

Regulatory Model: P207G
Regulatory Type: P207G001
April 2026
Rev. A00

Notes, cautions, and warnings

NOTE: A NOTE indicates important information that helps you make better use of your product.

CAUTION: A CAUTION indicates either potential damage to hardware or loss of data and tells you how to avoid the problem.

WARNING: A WARNING indicates a potential for property damage, personal injury, or death.

Copyright © Dell Inc. All Rights Reserved. Dell Technologies, Dell, and other trademarks are trademarks of Dell Inc. or its subsidiaries. Other trademarks may be trademarks of their respective owners.

Contents

Chapter 1: Views of Dell Pro Precision 5 14S PW514260 5
Right view 5
Left view 5
Top view 7
Front view 8
Bottom view 9
Locate the Service Tag or Express Service Code label of your computer 9
Battery-status light 10

Chapter 2: Set up your Dell Pro Precision 5 14S PW514260 11

Chapter 3: Specifications of Dell Pro Precision 5 14S PW514260 13
Dimensions and weight 13
Processor 13
Chipset 15
Operating system 15
Memory 15
External ports and slots 16
Internal slots 16
Ethernet 16
Wireless module 17
WWAN module 17
Audio 19
Storage 19
Keyboard 20
Keyboard shortcuts of Dell Pro Precision 5 14S PW514260 21
Camera 22
Touchpad 23
Power adapter 23
Power adapter requirements 24
Battery 25
Power requirements (for 3-cell lithium-ion, 57 Wh battery) 25
Power requirements (for 3-cell lithium-ion, 70 Wh battery) 26
Display 26
Fingerprint reader 28
Sensors 28
GPU—Integrated 28
External display support 29
Hardware security 29
Smart-card reader 29
Contacted smart-card reader 29
Contactless smart-card reader 30
Operating and storage environment 31
Dell low blue light display 32

Dell Optimizer....32
Dell support policy....32

Chapter 4: Revision history....33

1

Views of Dell Pro Precision 5 14S PW514260

Right view



Figure 1. Right view

1. **nano-SIM card slot (optional)**

   Insert a nano-SIM card to connect to a mobile broadband network.

   NOTE: Availability of the nano-SIM card slot depends on the region and the configuration that you ordered.

2. **Global headset jack**

   Supports connection of headphones or combo headsets with integrated microphone for audio input and output.

3. **USB 3.2 Gen 1 port with PowerShare**

   Supports data transfer speed up to 5 Gbps for connecting external storage and peripheral devices, and provides power output capability for charging compatible devices even when the computer is turned off.

4. **RJ45 ethernet port (1 Gbps)**

   Provides wired network connectivity by connecting to a router or modem via an Ethernet cable. Supports data transfer speeds up to 1 Gbps for stable and high-speed internet or LAN access.

5. **Security-cable slot (wedge-shaped)**

   Provides a slot for a cable lock to secure the computer against unauthorized removal or movement.

Left view



Figure 2. Left view

1. **HDMI-out 2.1 TMDS 4k/HDCP2.3 port:**

   Outputs high-definition video and audio to external displays, TVs, or HDMI-in devices. Supports resolutions up to 4096 × 2160 at 60 Hz with HDCP 2.3 for secure content playback, enabling users to extend or mirror their display for entertainment, presentations, or multi-screen setups.

2. **USB 3.2 Gen 1 (5 Gbps) port**

   Supports data transfer speed up to 5 Gbps for connecting external storage and peripheral devices.

   NOTE: For more information about connecting a Dell Docking Station to the Thunderbolt 4 port, search Dell Support Site.

   NOTE: A USB Type-C to DisplayPort adapter (sold separately) is required to connect a DisplayPort device.

   NOTE: USB4 is backward compatible with USB 3.2, USB 2.0, and Thunderbolt 3.

   NOTE: Thunderbolt 4 supports two 4K displays or one 8K display.

3. **Thunderbolt 4 port with Power Delivery and DisplayPort:**

   Transfers data at high speed, charges your device, and connects to external displays—all through one port:

   - **Thunderbolt 4**: Offers up to 40 Gbps data transfer speed, enabling ultra-fast file transfers, external SSDs, and high-performance peripherals. Offers backward compatibility with USB 3.2, USB 2.0, and Thunderbolt 3.
   - **DisplayPort** : Allows video output to external monitors (supports up to dual 4K@60Hz or single 8K@60Hz displays), making it ideal for docking stations or multi-monitor setups. Compatible with USB-C to HDMI/DP adapters and docking stations.
   - **USB4 Compatibility**: Ensures broad support for USB devices with efficient bandwidth sharing and backward compatibility with USB 3.2, USB 2.0, and Thunderbolt 3.
   - **Power Delivery (PD)**: Supports charging of laptops, tablets, and other devices with up to 100 W power through the same port, reducing the need for separate power adapters.

4. **Battery-status light**: Indicates the current battery charge level and charging status through LED signals, helping users monitor power availability and charging progress.
   - **Solid white**: Battery is charging
   - **Solid amber**: Battery critically low
   - **No Light**: Battery is adequately charged or the computer is turned off

5. **Smart-card reader slot (optional)**

   Supports ISO/IEC 7816-compliant smart cards and enables secure user authentication through hardware-based cryptographic functions. When a compatible smart card is inserted, the system can perform secure login, digital signature verification, and access control operations. This feature is typically used in enterprise environments requiring enhanced security protocols.

Top view

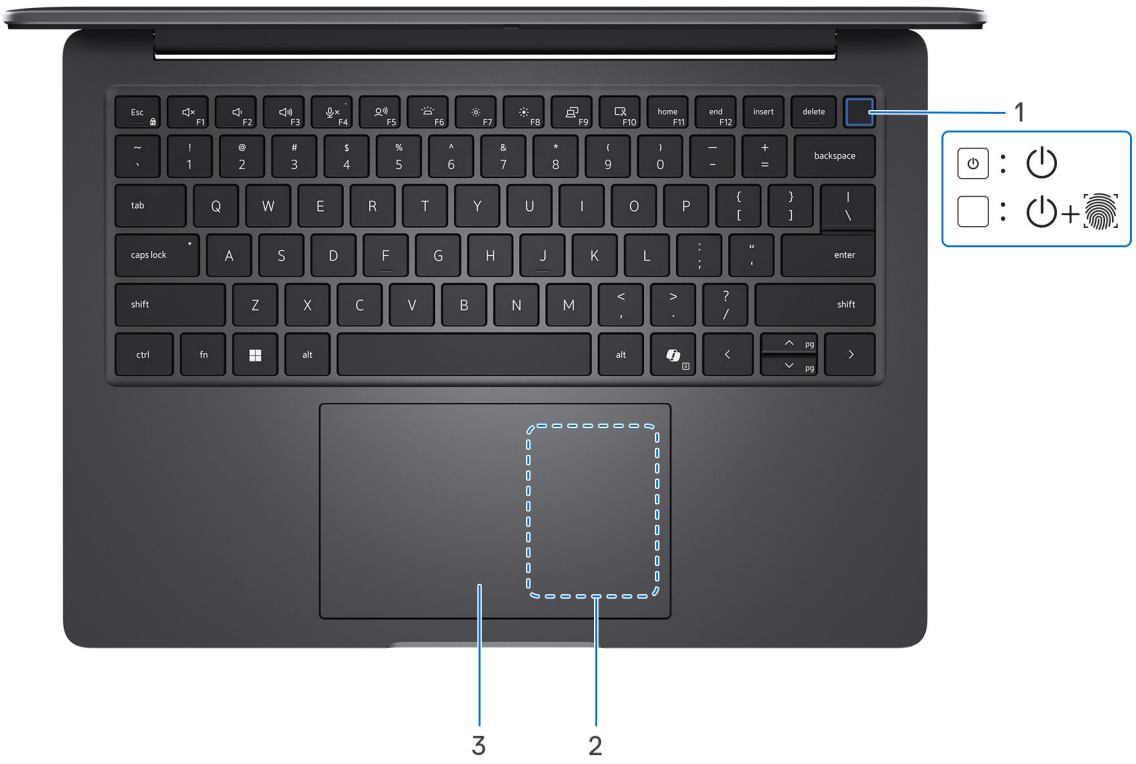


Figure 3. Top view

1. **Power button with optional fingerprint reader**

   Provides standard power control. If equipped with a fingerprint reader, it also supports secure user authentication via a single touch.

   NOTE: When the computer is turned on, press the power button to put the computer into sleep state; press and hold the power button for 10 seconds to force shut-down the computer.

   NOTE: The power-status light on the power button is available only on computers without the fingerprint reader. Computers that are shipped with the fingerprint reader that is integrated on the power button will not have the power-status light on the power button.

   NOTE: The power-button behavior can be customized in the operating system.

2. **NFC/Contactless smart card reader (optional)**

   Enables NFC-enabled devices to communicate with your computer.

3. **Touchpad**

   Used to move the mouse pointer. You can tap, swipe, or drag your finger to click, scroll, or move items on the screen—just like using a mouse.

Front view



Figure 4. Front view

1. **Left microphone**

   Provides digital sound input for audio recording and voice calls.

2. **IR Sensor (optional)**

   The sensor detects the absence of the user and locks the computer to enhance security and reduce power consumption.

3. **Infrared emitter (optional)**

   Emits infrared light to support the infrared camera in detecting facial features and tracking motion for secure and responsive functionality.

4. **Camera shutter**

   Features a manual privacy shutter that can slide to access the camera lens and slide over to block its view and safeguard your privacy when the camera is not in use.

5. **Camera**

   Allows you to conduct video calls, capture still images, and record video content for communication and documentation purposes.

6. **Camera-status light**

   Illuminates automatically to indicate active camera usage, letting you know when the camera is recording or streaming.

7. **Right microphone**

   Provides digital sound input for audio recording and voice calls.

Bottom view



Figure 5. Bottom view

1. **Right speaker**

   Provides audio output.

2. **MyDell QR code**

   MyDell is your hub for content that is personalized to your Dell Pro Precision 5 14S PW514260, including videos, articles, manuals, and access to support.

3. **Service Tag label**

   The Service Tag is a unique alphanumeric identifier that enables Dell service technicians to identify the hardware components in your computer and access warranty information.

4. **Air vents**

   Provides ventilation for your computer. Clogged air vents can cause overheating and can affect the performance of your computer and potentially cause hardware issues. Keep the air vents clear of obstructions and clean them regularly to prevent the build-up of dust and dirt. For more information about cleaning air vents, search Dell Support site.

5. **Left speaker**

   Provides audio output.

Locate the Service Tag or Express Service Code label of your computer

The service tag is a unique alphanumeric identifier that allows Dell service technicians to identify the hardware components in your computer and access warranty information. The Express Service Code is a numeric version of the Service Tag.

For more information about how to find the Service Tag of your computer, search Dell Support Site.



Figure 6. Service Tag/Express Service Code location

Battery-status light

The following table lists the battery-status light of your Dell Pro Precision 5 14S PW514260.

Table 1. Battery-status light behavior

Power source	LED behavior	System power state	Battery charge level
AC adapter	Off	S0 or S5	100%
AC adapter	Solid white	S0 or S5	< 100%
Battery	Off	S0 or S5	11-100%
Battery	Solid amber	S0 or S5	< 10%

- S0 (ON): The computer is turned on.
- S3 (Sleep): Screen is off, and the computer is in sleep mode.
- S4 (Hibernate): The computer consumes the least power in the Hibernate state than in the ON or OFF state. The computer is almost in the OFF state. The context data is written to a storage device, allowing you to resume from where you left after the computer is turned on.
- S5 (OFF): The computer is in a shutdown state.

2

Set up your Dell Pro Precision 5 14S PW514260

About this task

NOTE: The images in this document may differ from your computer depending on the configuration you ordered.

Steps

1. Connect the power adapter to one of the Thunderbolt 4 ports and press the power button.



Figure 7. Connect the power adapter and press the power button

NOTE: The battery may go into power-saving mode during shipment to conserve charge on the battery. Ensure that the power adapter is connected to your computer when it is turned on for the first time.

2. Finish the operating system setup.

   For Ubuntu:

   Follow the on-screen instructions to complete the setup. For more information about installing and configuring Ubuntu, search in the Knowledge Base Resource at Dell Support Site.

   For Windows:

Follow the on-screen instructions to complete the setup. When setting up, it is recommended that you:

- Connect to a network for Windows updates.

  NOTE: If connecting to a secured wireless network, enter the password for the wireless network access when prompted.

- If connected to the Internet, sign-in with an existing Microsoft account or create a new account.
- On the **Support and Protection** screen, enter your contact details.

3. Locate and use Dell apps from the Windows Start menu—Recommended.

Table 2. Locate Dell apps

Resources	Description
	**Dell Product Registration** Register your computer with Dell.
	**Dell Help & Support** Access help and support for your computer.
	**SupportAssist** SupportAssist keeps your computer running at its best by optimizing settings, detecting issue, and removing viruses. It also notifies when updates are available for your computer. SupportAssist proactively checks the health of your computer hardware and software. When an issue is detected, the necessary system state information is sent to Dell to begin troubleshooting. SupportAssist is preinstalled on most of the Dell devices running the Windows operating system. For more information, see Support Assist documentation at Dell Support Site. **NOTE:** In SupportAssist, click the warranty expiry date to renew or upgrade your warranty.
	**Dell Optimizer** Dell Optimizer is an AI-based software application that allows you to customize your computer settings for power and battery, and more. For Dell Pro Precision 5 14S PW514260 with Dell Optimizer, you can: • Tune the performance, power consumption, cooling, and fan noise with selectable thermal modes. • Download and redeem the apps that are purchased with your computer. For more information about configuring and using these features, search for *Dell Optimizer* at Dell Support Site.

3

Specifications of Dell Pro Precision 5 14S PW514260

Dimensions and weight

The following table lists the height, width, depth, and weight of your Dell Pro Precision 5 14S PW514260.

Table 3. Dimensions and weight

Description	Values
Front height	0.42 in (10.80 mm)
Rear height	0.58 in (14.72 mm)
Width	12.42 in. (315.5 mm)
Depth	8.9 in. (226 mm)
Weight **NOTE:** The weight of your computer depends on the configuration that you ordered.	3.12 lbs (1.42 kg)

Processor

The following table lists the details of the processors that are supported on your Dell Pro Precision 5 14S PW514260.

Table 4. Processor

Description	Option one	Option two	Option three	Option four	Option five	Option six
Type	Intel Core Ultra 5 336H vPro	Intel Core Ultra 7 366H vPro	Intel Core Ultra 9 386H vPro	Intel Core Ultra 5 338H vPro	Intel Core Ultra 7 368H vPro	Intel Core Ultra 9 388H vPro
Wattage	25 W	25 W	25 W	25 W	25 W	25 W
Total cores	12	16	16	12	16	16
Number of Performance-cores	4	4	4	4	4	4
Number of Efficient-cores	4	8	8	4	8	8
Number of Low Power Efficient-cores	4	4	4	4	4	4
Total threads **NOTE:** : Intel Hyper-	12	16	16	12	16	16

Table 4. Processor (continued)

Description	Option one	Option two	Option three	Option four	Option five	Option six
Threading Technology is only available on Performance-cores.						
Speed	Up to 3.7 GHz	Up to 3.8 GHz	Up to 3.8 GHz	Up to 3.7 GHz	Up to 3.8 GHz	Up to 4.0 GHz
Performance-core frequency						
Base frequency	1.9 GHz	2.0 GHz	2.1 GHz	1.9 GHz	2.0 GHz	2.1 GHz
Maximum turbo frequency	4.6 GHz	4.8 GHz	4.9 GHz	4.7 GHz	5 GHz	5.1 GHz
Efficient-core frequency						
Base frequency	1.5 GHz	1.6 GHz	1.6 GHz	1.5 GHz	1.6 GHz	1.6 GHz
Maximum turbo frequency	3.4 GHz	3.6 GHz	3.7 GHz	3.4 GHz	3.8 GHz	3.8 GHz
Thermal Mode/Thermal Design Power (TDP)						
Cool	27 W	27 W	27 W	27 W	27 W	27 W
Optimized	27 W	27 W	27 W	27 W	27 W	27 W
Quiet	33 W	33 W	33 W	33 W	33 W	33 W
Ultra performance	36 W	36 W	36 W	36 W	36 W	36 W
NOTE: Processor clock speeds and thermal design power differ according to the thermal mode selected in the Dell Optimizer app on your computer.						
Cache	18 MB	18 MB	18 MB	18 MB	18 MB	18 MB
Integrated graphics	Intel Graphics	Intel Graphics	Intel Graphics	Intel Arc Pro B370	Intel Arc Pro B390	Intel Arc Pro B390
Neural Processing Unit (NPU) performance	47 TOPS	50 TOPS	50 TOPS	47 TOPS	50 TOPS	50 TOPS
NOTE: Tera Operations Per Second (TOPS) is an AI performance metric that measures how many trillions of operations per second an AI processor can perform.						

Chipset

The following table lists the details of the chipset that is supported by your Dell Pro Precision 5 14S PW514260.

Table 5. Chipset

Description	Values
Chipset	System on Chip (SOC)
Processor	• Series 3 Intel® Core™ Ultra 5 336H vPro® • Series 3 Intel® Core™ Ultra 7 366H vPro® • Series 3 Intel® Core™ Ultra 9 386H vPro® • Series 3 Intel® Core™ Ultra 5 338H vPro® • Series 3 Intel® Core™ Ultra 7 368H vPro® • Series 3 Intel® Core™ Ultra 9 388H vPro®
DRAM bus width	64-bit
Flash EPROM	16 MB + 32 MB
PCIe bus	Up to Gen5

Operating system

Your Dell Pro Precision 5 14S PW514260 supports the following operating systems:

- Windows 11 Home
- Windows 11 Pro
- Ubuntu® Linux® 24.04
- Red Hat Linux® 10.3 Enterprise

Memory

The following table lists the memory specifications that are supported by your Dell Pro Precision 5 14S PW514260.

Table 6. Memory specifications

Description	Values
Memory slots	One
Memory type	Dual-channel LPDDR5x
Memory speed	8533 MT/s
Maximum memory configuration	64 GB
Minimum memory configuration	16 GB
Memory size per slot	16 GB, 32 GB, 64 GB
Memory configurations supported	• 16 GB, LPCAMM2, 8533 MT/s • 32 GB, LPCAMM2, 8533 MT/s • 64 GB, LPCAMM2, 8533 MT/s

External ports and slots

The following table lists the external ports and slots on your Dell Pro Precision 5 14S PW514260.

Table 7. External ports and slots

Description	Values
Network port	One RJ45 ethernet port (1 Gbps)
USB ports	• Two Thunderbolt™ 4 (40 Gbps) ports with Power Delivery and DisplayPort™ • One USB 3.2 Gen 1 (5 Gbps) port with PowerShare • One USB 3.2 Gen 1 (5 Gbps) port
Audio port	One headset (headphone and microphone combo) port
Video port(s)	One HDMI 2.1 port
Media-card reader	Not supported
Power-adapter port	• Two TBT4/USB4 Type-C® port with Power Delivery • One USB 3.2 Gen 1 Type-A port with PowerShare
Security-cable slot	One wedge-shaped lock slot
SIM-card slot	One nano-SIM card slot (optional)
Smart card reader	Supported (optional)

Internal slots

The following table lists the internal slots of your Dell Pro Precision 5 14S PW514260.

Table 8. Internal slots

Description	Values
M.2	• One M.2 2230/2280 slot for solid-state drive • One M.2 2230 slot for Wi-Fi and Bluetooth card • One M.2 3042-4G/3052-5G slot for WWAN card **NOTE:** To learn more about the features of different types of M.2 cards, search Dell Support Site.

Ethernet

The following table lists the wired Ethernet Local Area Network (LAN) specifications of your Dell Pro Precision 5 14S PW514260.

Table 9. Ethernet specifications

Description	Values
Model	Intel I219-LM
Transfer rate	10/100/1000 MT/s

Wireless module

The following table lists the Wireless Local Area Network (WLAN) module that is supported on your Dell Pro Precision 5 14S PW514260.

Table 10. Wireless module specifications

Description	Values
Model number	Intel Wi-Fi 7 BE211
Transfer rate	Up to 5 Gbps
Frequency bands supported	• 2.4 GHz • 5 GHz • 6 GHz **NOTE:** The 6 GHz frequency is only supported on computers that are installed with the Windows 11 operating system.
Wireless standards	• WiFi 802.11a/b/g • Wi-Fi 4 (Wi-Fi 802.11n) • Wi-Fi 5 (WiFi 802.11ac) • Wi-Fi 6E (WiFi 802.11ax) • Wi-Fi 7 (WiFi 802.11be) **NOTE:** Wi-Fi 7 standard is only supported on computers that are installed with the Windows 11 operating system.
Encryption	• 64-bit/128-bit WEP • AES-CCMP • TKIP
Bluetooth wireless card **NOTE:** The functionality of the Bluetooth wireless card may vary based on the operating system.	Bluetooth 6.0 wireless card

WWAN module

The following table lists the Wireless Wide Area Network (WWAN) modules that are supported in your Dell Pro Precision 5 14S PW514260.

NOTE: The WWAN module is available only on certain configurations and in certain regions.

NOTE: Availability of the eSIM feature on this module may vary depending on your region and the support that is offered by your mobile carrier.

NOTE: For instructions on how to setup SIM or eSIM connections on your computer, see the *SIM/eSIM Setup Guide for Windows* available with your product documentation at Dell Support Site.

Table 11. WWAN module specifications

Description	Option one	Option two
Model number	MediaTek T700 Global 5G Modem (DW5933e-m)	Qualcomm Snapdragon SDX12 Global LTE-Advanced, CAT12 (DW5826e-m)
Form factor	M.2 3052 Key-B	M.2 3042 Key-B

Table 11. WWAN module specifications (continued)

Description	Option one	Option two
Host interface	PCIe Gen3	USB 3.0/2.0
Network standard	NR FR1(Sub6) FDD/TDD, LTE FDD/TDD,WCDMA/HSPA+, GPS/GLONASS/Galileo/BDS/QZSS	LTE FDD/TDD, WCDMA/HSPA+, GPS/GLONASS/Beidou/Galileo/QZSS
Transfer data rate	• SA: DL 4.67 Gbps / UL 1.25 Gbps • NSA: DL 3.74 Gbps / UL 835 Mbps • LTE: DL 1.6 Gbps (CAT19) / UL 211 Mbps • UMTS: DL 384 kbps / UL 384 kbps DL DC-HSPA+: 42 Mbps (CAT24) / UL 11.5 Mbps (CAT7)	• Up to 600 Mbps DL (CAT12) • Up to 150 Mbps UL
Operating frequency bands	For example • NR(n1, n2, n3, n5, n7, n8, n20, n25, n28, n30, n38, n40, n41, n48, n66, n71, n77, n78, n79)) • LTE (B1, B2, B3, B4, B5, B7, B8, B12, B13, B14, B17, B18, B19, B20, B25, B26, B28, B29, B30, B32, B34, B38, B39, B40, B41, B42, B43, B46, B48, B66, B71) • WCDMA/HSPA+ (1, 2, 4, 5, 8)	• LTE(B1, B2, B3, B4, B5, B7, B8, B12, B13, B14, B18, B19, B20, B25, B26, B28, B29, B32, B38, B39, B40, B41, B42, B43, B48, B66, B71) • HSPA+ (1,2,4,5,6,8,9,19)
Power supply	DC 3.135V to 4.4V, typical 3.3V	DC 3.135 V to 4.4 V, Typical 3.3 V
SIM card	Supported through external SIM slot	Supported through external SIM slot
eSIM with dual SIM (DSSA)	Supported (The availability of eSIM functionality embedded on the module is dependent on the region and specific carrier requirements)	Supported (The availability of eSIM functionality embedded on the module is dependent on the region and specific carrier requirements)
Antenna diversity	Supported	Supported
Radio on/off	Supported	Supported
Wake on wireless WAN	Supported	Supported
Operating temperature	• Normal: -10°C to + 5°C • Extended: -20°C to +65°C • Storage: –60°C to +100°C	• Normal: -30°C to + 70°C • Extended: -40°C to +85°C • Normal: -40°C to +85°C
Antenna connector	• WWAN TX0 & PRX Connector × 1 • WWAN DRX Combined GPS Connector × 1 • WWAN MIMO PRX Connector × 1 • WWAN TX1 & MIMO DRX Connector × 1	• WWAN Main Antenna x 1 • WWAN Diversity Antenna X 1
NOTE: For instructions to find your computer's International Mobile Equipment Identity (IMEI) number, search Dell Support Site.		

Audio

The following table lists the audio specifications of your Dell Pro Precision 5 14S PW514260.

Table 12. Audio specifications

Description	Values
Audio controller	Cirrus Logic CS42L45
Stereo conversion	Supported
Internal audio interface	Soundwire Interface
External audio interface	One global headset port
Number of speakers	2
Internal-speaker amplifier	Supported
External volume controls	Keyboard shortcut controls
Speaker output:	
Average	2 W
Peak	2.5 W
Microphone	Dual digital-array microphones

Storage

This section lists the storage options on your Dell Pro Precision 5 14S PW514260.

Your Dell Pro Precision 5 14S PW514260 supports one of the following storage configurations:

- 256 GB SSD TLC M.2 2230 PCIe Gen4
- 512 GB SSD TLC M.2 2230 PCIe Gen4
- 1 TB SSD TLC M.2 2230 PCIe Gen4
- 512 GB SSD TLC M.2 2230 PCIe Gen5 SED Ready (Opal certified)
- 1 TB SSD TLC with DRAM M.2 2280 PCIe Gen5 SED Ready (Opal certified)
- 2 TB SSD TLC with DRAM M.2 2280 PCIe Gen5 SED Ready (Opal certified)

Table 13. Storage specifications

Storage type	Interface type	Capacity
M.2 2280 solid state drive, TLC with DRAM, Self-Encrypting Ready	SATA AHCI, up to 6 Gbps	Upto 2 TB
M.2 2230 solid state drive, TLC **NOTE:** To replace your M.2 2280 with an M.2 2230 SSD, you must purchase the Dell SSD bracket kit to self-install the M.2 2230 SSD in the SSD slot.	PCIe Gen3.0x4 NVMe, up to 32 Gbps	Up to 1 TB
M.2 2280 Class 40 Self Encrypting Opal 2.0	PCIe Gen3.0x2 NVMe, up to 16 Gbps	Up to 1 TB

Table 13. Storage specifications (continued)

Storage type	Interface type	Capacity
M.2 2280 Class 40 SED (Self-Encrypting Drive)	SATA AHCI, up to 1.5 Gbps	256 GB, 512 GB and 1 TB

Keyboard

The following table lists the keyboard specifications of your Dell Pro Precision 5 14S PW514260.

Table 14. Keyboard specifications

Description	Values
Keyboard type	• Mini LED backlit keyboard • Standard non-backlit keyboard
Keyboard layout	• Belgian and French European: AZERTY • Others: QWERTY
Number of keys	• Arabic, Canada (Bilingual) (MUI), Chinese (Traditional), English International, English US, Greek, Hebrew, Korean, Thai: 79 keys • Hungarian, Belgian, Czech/Slovak (MUI), English UK, French (European), German, Italian, Nordic (MUI), Portuguese, Spanish (Castillian), Icelandic, Spanish (Latin America), Swiss/European, Turkish: 80 keys • Portuguese (Brazil): 81 keys • Japanese: 83 keys
Key pitch	X=19.05 mm key pitch Y=18.05 mm key pitch
Keyboard shortcuts	Some keys on your keyboard have two symbols on them. These keys can be used to type alternate characters or to perform secondary functions. • To type the alternate character, press Shift and the desired key. • To perform secondary functions, press Fn and the desired key. **NOTE:** Press Fn+Esc to switch the primary behavior of the function keys (F1–F12) between two modes - multimedia key mode and function key mode. **NOTE:** You can define the primary behavior of the function keys (F1F12) by changing **Function Key Behavior** in the BIOS Setup program. **NOTE:** If Copilot in Windows is not available on your computer, pressing the Copilot key launches Windows search. For more information about Copilot in Windows, search Dell Support site. For more information, see Keyboard function keys.

Keyboard shortcuts of Dell Pro Precision 5 14S PW514260

NOTE: Keyboard characters may differ depending on the keyboard language configuration. Keys that are used for shortcuts remain the same across all language configurations.

Some keys on your keyboard have two symbols on them. These keys can be used to type alternate characters or to perform secondary functions. The symbol that is shown on the lower part of the key refers to the character that is typed out when the key is pressed. If you press shift and the key, the symbol that is shown on the upper part of the key is typed out. For example, if you press **2**, 2 is typed out; if you press **Shift** + **2**, @ is typed out.

The keys F1-F12 at the top row of the keyboard are function keys for multimedia control, as indicated by the icon on the key. Press the function key to enable the task represented by the icon. For example, pressing F1 mutes the audio (see the table below).

However, if the function keys F1-F12 are needed for specific software applications, multimedia functionality can be disabled by pressing **Fn** + **Esc**. Later, multimedia control can be invoked by pressing **Fn** and the respective function key. For example, mute audio by pressing **Fn** + **F1**.

NOTE: You can also define the primary behavior of the function keys (F1–F12) by changing **Function Key Behavior** in the BIOS setup program.

Table 15. Function key primary behavior

Function key	Primary behavior
F1	Mute or unmute audio
F2	Decrease volume
F3	Increase volume
F4	Microphone Mute
F5	Dictation (for non-German layout)
F6	Keyboard Illumination/Backlight
F7	Decrease brightness
F8	Increase brightness
F9	Switch to external display
F10	Print screen
F11	Home
F12	End

The **Fn** key is also used with selected keys on the keyboard to invoke secondary functions.

Table 16. Secondary behavior

Function key	Secondary behavior
Fn + F1	Operating system and application-specific F1 behavior
Fn + F2	Operating system and application-specific F2 behavior
Fn + F3	Operating system and application-specific F3 behavior
Fn + F4	Operating system and application-specific F4 behavior
Fn + F5	Operating system and application-specific F5 behavior
Fn + F6	Operating system and application-specific F6 behavior
Fn + F7	Operating system and application-specific F6 behavior
Fn + F8	Operating system and application-specific F8 behavior
Fn + F9	Operating system and application-specific F9 behavior

Table 16. Secondary behavior (continued)

Function key	Secondary behavior
Fn + F10	Operating system and application-specific F10 behavior
Fn + F11	Operating system and application-specific F11 behavior
Fn + F12	Operating system and application-specific F12 behavior
Fn + Ctrl	Open the application menu
Fn + Esc	Toggle between multimedia and function key behavior
Fn + PgUp	Scroll up the document or page
Fn + PgDn	Scroll down the document or page
Fn + Home	Move to the beginning of the document
Fn + End	Move to the end of the document
Fn + S	Scroll lock
FB + B	Pause
Fn + Ctrl + B	Break
Fn + R	SysReq
Fn + Shift + B	Unobtrusive mode
Copilot	Launch Copilot in Windows **NOTE:** If Copilot in Windows is not available on your computer, the Copilot key launches Recall. If both Recall and Copilot in Windows are not available on your computer, the Copilot key launches Windows Search. For more information about Copilot in Windows and Recall, search in the Knowledge Base Resource at the Dell Support Site.

Camera

The following table lists the camera specifications of your Dell Pro Precision 5 14S PW514260.

Table 17. Camera specifications

Description	Values	Values	Values
Number of cameras	One	Two	Two
Camera type	RGB FHD camera	RGB FHD	8MP RGB and IR camera
Camera location	Front	Front	Front
Camera sensor type	CMOS sensor technology	CMOS sensor technology	CMOS sensor technology
Camera resolution:			
Still image	2.07 megapixel	2.07 megapixel	8.29 megapixels
Video	1920 x 1080 (FHD) at 30 fps	1920 x 1080 (FHD) at 30 fps	2560 x 1440 (QHD) at 30 fps
Infrared camera resolution:			

Table 17. Camera specifications (continued)

Description	Values	Values	Values
Video	Not applicable	360 x 360 at 15 fps	360 x 360 at 15fps
Diagonal viewing angle:			
Camera	83 degrees	83 degrees	84.7 degrees
Infrared camera	Not applicable	81.3 degrees	81.3 degrees

Touchpad

The following table lists the touchpad specifications of your Dell Pro Precision 5 14S PW514260.

Table 18. Touchpad specifications

Description	Values
Touchpad resolution	>300 DPI
Touchpad dimensions:	
Horizontal	128 mm
Vertical	78.5 mm
Touchpad gestures	For more information about the touchpad gestures that are available on: • Windows, search Microsoft Support Site. • Ubuntu, search Ubuntu Support Site.

Power adapter

The following table lists the power adapter specifications of your Dell Pro Precision 5 14S PW514260.

Table 19. Power-adapter specifications

Description	Option one	Option two	Option three	Option 4	Option 5	Option 6
Type	65 W AC adapter	100 W AC adapter	105 W AC adapter	65W AC small form factor adapter, USB Type-C , 2-pin	65W AC cable adapter	65 W AC adapter, USB Type-C
Power-adapter dimensions:						
Height	26.5 mm (1.04 in.)	26.5 mm (1.04 in.)	26.5 mm (1.04 in.)	31 mm (1.22 in.)	31 mm (1.22 in.)	31 mm (1.22 in.)
Width	60 mm (2.36 in.)	60 mm (2.36 in.)	60 mm (2.36 in.)	41.5 mm (1.63 in.)	41 mm (1.61 in.)	41 mm (1.61 in.)
Depth	96.5 mm(3.8 in.)	122 mm (4.80 in.)	122 mm (4.80 in.)	48.5 mm (1.91 in.)	63 mm (2.48 in.)	63 mm (2.48 in.)
Input voltage	100 VAC–240 VAC	100 VAC–240 VAC	100 VAC–240 VAC	100 VAC–240VAC	100 VAC–240VAC	100 VAC–240VAC
Input frequency	50 Hz–60 Hz	50 Hz–60 Hz	50 Hz–60 Hz	50 Hz–60 Hz	50 Hz–60 Hz	50 Hz–60 Hz

Table 19. Power-adapter specifications (continued)

Description	Option one	Option two	Option three	Option 4	Option 5	Option 6
Input current (maximum)	1.70 A	1.70 A	1.70 A	1.70 A	1.70 A	1.70 A
Output current (continuous)	• 20 V/5 A (Continuous) • 15 V/3 A (Continuous) • 9 V/3 A (Continuous) • 5 V/3 A (Continuous)	• 20 V/5 A (Continuous) • 15 V/3 A (Continuous) • 9 V/3 A (Continuous) • 5 V/3 A (Continuous)	• 20 V/5.25 A (Continuous) • 15 V/3 A (Continuous) • 9 V/3 A (Continuous) • 5 V/3 A (Continuous)	• 20 V/3.25 A (Continuous) • 15 V/3 A (Continuous) • 9 V/3 A (Continuous) • 5 V/3 A (Continuous)	• 20 V/3.25 A (Continuous) • 15 V/3 A (Continuous) • 9 V/3 A (Continuous) • 5 V/3 A (Continuous)	• 20 V/3.25 A (Continuous) • 15 V/3 A (Continuous) • 9 V/3 A (Continuous) • 5 V/3 A (Continuous)
Rated output voltage	• 20 VDC • 15 VDC • 9 VDC • 5 VDC	• 20 VDC • 15 VDC • 9 VDC • 5 VDC	• 20 VDC • 15 VDC • 9 VDC • 5 VDC	• 20 VDC • 15 VDC • 9 VDC • 5 VDC	• 20 VDC • 15 VDC • 9 VDC • 5 VDC	• 20 VDC • 15 VDC • 9 VDC • 5 VDC
Temperature range:						
Operating	0°C to 45°C (32°F to 109°F)	0°C to 35°C (32°F to 95°F)	0°C to 35°C (32°F to 95°F)	0°C to 45°C (32°F to 109°F)	0°C to 45°C (32°F to 109°F)	0°C to 45°C (32°F to 109°F)
Storage	-40°C to 70°C (-40°F to 158°F)	-40°C to 70°C (-40°F to 158°F)	-40°C to 70°C (-40°F to 158°F)	-40°C to 70°C (-40°F to 158°F)	-40°C to 70°C (-40°F to 158°F)	-40°C to 70°C (-40°F to 158°F)
CAUTION: Operating and storage temperature ranges may differ among components, so operating or storing the device outside these ranges may impact the performance of specific components.						

Power adapter requirements

NOTE: If you did not purchase the Dell-branded power adapter that is recommended for your computer, ensure that the power adapter you use meets the following requirements.

The following table lists the power adapter requirements for your Dell Pro Precision 5 14S PW514260.

Table 20. Power adapter requirements

Description	Value
Power that is required from a power adapter to achieve optimal performance.	65 W
Power that charges the computer at a slower speed. **NOTE:** A warning message may appear informing you about the use of a lower-powered adapter and slower charging speed.	Less than 60 W
Minimum power that is required from a power adapter to operate the computer and charge the battery. **NOTE:** A warning message appears informing you about the use of a lower-powered adapter and slower charging speed.	27 W
USB Power Delivery (PD) fast charging	Supported

Table 20. Power adapter requirements (continued)

Description	Value
ExpressCharge mode	Supported

Battery

The following table lists the battery specifications of your Dell Pro Precision 5 14S PW514260.

Table 21. Battery specifications

Description	Option two	Option three
Battery type	3-cell lithium-ion (57 Wh)	3-cell lithium-ion (70 Wh)
Battery voltage (nominal)	11.25 VDC	11.7 VDC
Battery weight (maximum)	0.24 kg (0.53 lb)	0.265 kg(0.59 lb)
Battery dimensions:		
Height	6.50 mm (0.26 in.)	6.50 mm (0.26 in.)
Width	272 mm (10.71 in.)	272 mm (10.71 in.)
Depth	74.90 mm (2.95 in.)	74.90 mm (2.95 in.)
Temperature range:		
Operating	• Charge: 0°C to 50°C (32°F to 122°F) • Discharge: 0°C to 70°C (32°F to 158°F)	• Charge: 0°C to 50°C (32°F to 122°F) • Discharge: 0°C to 70°C (32°F to 158°F)
Storage	-20°C to 60°C (-4°F to 140°F)	-20°C to 60°C (-4°F to 140°F)
Battery operating time	Varies depending on operating conditions and can significantly reduce under certain power-intensive conditions	
Battery charging time (approximate, when the computer is turned off)		
Standard	3 hours	3 hours
ExpressCharge	2 hours	2 hours
ExpressCharge boost	From 0% up to 35% in as little as 20 minutes	From 0% up to 35% in as little as 20 minutes
Coin-cell battery	None	None

NOTE: You can control the battery charging time, duration, start and end time, and so on, using the settings on the Dell Optimizer application. For more information about Dell Optimizer application, search Dell Support Site.

CAUTION: Operating and storage temperature ranges may differ among components, so operating or storing the device outside these ranges may impact the performance of specific components.

CAUTION: Dell Technologies recommends that you charge the battery regularly for optimal power consumption.

Power requirements (for 3-cell lithium-ion, 57 Wh battery)

NOTE: The information in this section is applicable to the European Union (EU) countries.




Figure 8. Pictogram for power charging requirements

The power that is delivered by the charger must be between a minimum of 27 Watts that is required by the radio equipment, and a maximum of 59 Watts in order to achieve the maximum charging speed.

This computer supports USB Power Delivery (PD) fast charging.

Power requirements (for 3-cell lithium-ion, 70 Wh battery)

NOTE: The information in this section is applicable to the European Union (EU) countries.




Figure 9. Pictogram for power charging requirements

The power that is delivered by the charger must be between a minimum of 27 Watts that is required by the radio equipment, and a maximum of 93 Watts in order to achieve the maximum charging speed.

This computer supports USB Power Delivery (PD) fast charging.

Display

The following table lists the display specifications of your Dell Pro Precision 5 14S PW514260.

Table 22. Display specifications

Description	Option one	Option two	Option three	Option four	Option 5	Option 6
Display type	14-inch, Full High Definition+ (FHD+)	14-inch, Full High Definition+ (FHD+)	14-inch, Full High Definition+ (FHD+)	14-inch Full High Definition+ (FHD+)	14-inch Quad High Definition+ (QHD+)	14-inch, Full High Definition+ (FHD+), Organic Light Emitting Diode (OLED)
Display-panel technology	In-Plane Switching (IPS)	In-Plane Switching (IPS)	In-Plane Switching (IPS)	In-Plane Switching (IPS)	In-Plane Switching (IPS)	Active Matrix Organic Light Emitting Diode (AMOLED)
Display-panel dimensions (active area):						

Table 22. Display specifications (continued)

Description	Option one	Option two	Option three	Option four	Option 5	Option 6
Height	188.5 mm (7.42 in.)	188.5 mm (7.42 in.)	188.5 mm (7.42 in.)	188.5 mm (7.42 in.)	188.5 mm (7.42 in.)	188.64 mm (7.42 in.)
Width	301.59 mm (11.87 in.)	301.59 mm (11.87 in.)	301.59 mm (11.87 in.)	301.59 mm (11.87 in.)	301.59 mm (11.87 in.)	301.82 mm (11.87 in.)
Diagonal	355.6 mm (14.00 in.)	355.6 mm (14.00 in.)	355.6 mm (14.00 in.)	355.6 mm (14.00 in.)	355.6 mm (14.00 in.)	355.92 mm (14.00 in.)
Display-panel native resolution	1920 x 1200	1920 x 1200	1920 x 1200	1920 x 1200	2560 x 1440	1920 x 1200
Luminance (typical)	400 nits	400 nits	400 nits	500 nits	500 nits	300 nits
Megapixels	2.30	2.30	2.30	2.3	4.1	2.3
Color gamut	45% NTSC	45% NTSC	100% (sRGB)	100% (sRGB)	100% (sRGB)	100% (DCI-P3)
Pixels Per Inch (PPI)	162	162	162	162	215.6	162
Contrast ratio (typical)	• Minimum: 800:1 • Typical: 1000:1	• Minimum: 800:1 • Typical: 1000:1	800:1	1200:1	1000:1	1,000,000:1 (typical)
Response time (maximum)	35 milliseconds	35 milliseconds	35 milliseconds	35 milliseconds	35 milliseconds	1 milliseconds
Refresh rate	60 Hz	60 Hz	60 Hz	20 to 120 Hz	120 Hz	60 Hz
Horizontal view angle	• +/- 80 degrees(Min) • +/- 89 degrees(Typ)	• +/- 80 degrees(Min) • +/- 89 degrees(Typ)	• +/- 80 degrees(Min) • +/- 89 degrees(Typ)	• +/- 80 degrees(Min) • +/- 89 degrees(Typ)	• +/- 80 degrees(Min) • +/- 89 degrees(Typ)	• +/- 80 degrees(Min) • +/- 85 degrees(Typ)
Vertical view angle	• +/- 80 degrees(Min) • +/- 89 degrees(Typ)	• +/- 80 degrees(Min) • +/- 89 degrees(Typ)	• +/- 80 degrees(Min) • +/- 89 degrees(Typ)	• +/- 80 degrees(Min) • +/- 89 degrees(Typ)	• +/- 80 degrees(Min) • +/- 89 degrees(Typ)	• +/- 80 degrees(Min) • +/- 85 degrees(Typ)
Pixel pitch	0.157 mm	0.157 mm	0.157 mm	0.157 mm	0.1178	0.157
Power consumption (maximum)	4.64 W	3.3 W	4.5 W	3.35 W	5.7 W	5.7 W
Anti-glare vs glossy finish	Anti-glare	Anti-Glare	Anti-Glare	Anti-Glare	Anti-Glare	Anti-Glare
Touch options	No	No	Yes	No	No	No

Fingerprint reader

The following table lists the fingerprint-reader specifications of your Dell Pro Precision 5 14S PW514260.

Table 23. Fingerprint reader specifications

Description	Values
Sensor technology	Capacitive
Sensor resolution	500 ppi
Sensor pixel size	108 mm x 88 mm

Sensors

The following table lists the sensors of your Dell Pro Precision 5 14S PW514260.

Table 24. Sensors

Sensors support
Low Power Vision AI Based User Presence Detection - Realtek
Accelerometer (for positional sensing)
Sensor Hub- Intel ISH
Hall Effect Sensor (Lid Close)
Adaptive Thermal Performance (Lap vs. Desk mode)

GPU—Integrated

The following table lists the specifications of the integrated Graphics Processing Unit (GPU) supported by your Dell Pro Precision 5 14S PW514260.

Table 25. GPU—Integrated

Controller	External display support	Memory size	Processor
Intel Graphics	• One HDMI 2.1 port • DisplayPort 2.1 port using the USB Type-C port	Shared system memory	Intel Core Ultra 5 336H vPro, Intel Core Ultra 7 366H vPro, or Intel Core Ultra 9 386H vPro
Intel Arc Pro B370	• One HDMI 2.1 port • Two Thunderbolt 4 (40 Gbps) ports with Power Delivery and DisplayPort 2.1	Shared system memory	Intel Core Ultra 5 338H vPro
Intel Arc Pro B390	• One HDMI 2.1 port • Two Thunderbolt 4 (40 Gbps) ports with Power Delivery and DisplayPort 2.1	Shared system memory	Intel Core Ultra 7 368H vPro or Intel Core Ultra 9 388H vPro

External display support

The following table lists the external display support for your Dell Pro Precision 5 14S PW514260.

Table 26. External display support

Graphics card	Supported external displays with laptop display enabled	Supported external displays with laptop display disabled
Intel Graphics	• Three 4K monitors • One 8K monitor	• Four 4K monitors • Two 8K monitor
Intel Arc Pro B370		
Intel Arc Pro B390		

Hardware security

The following table lists the hardware security of your Dell Pro Precision 5 14S PW514260.

Table 27. Hardware security

Hardware security
Hardware TPM 2.0 discrete
Wedge lock slot
FIPS 140-3 certification for TPM
TCG Certificatication for TPM (Trusted Computing Group)
ControlVault 3 Advanced Authentication with FIPS 140-2 Level 3 Certification
Fingerprint Reader with Control Vault 3
Contacted Smart Card and Control Vault 3
Contactless Smart Card, NFC, and Control Vault 3
SED SSD NVMe, SSD and HDD
Statement of Non-Volatility
Post Quantum Cryptography(PQC)
Chassis Intrusion Detection

Smart-card reader

Contacted smart-card reader

The following table lists the contacted smart-card reader specifications of your Dell Pro Precision 5 14S PW514260.

Table 28. Contacted smart-card reader specifications

Capability	Description
ISO 7816 -3 Class A Card Support	Reader capable of reading 5 V powered smart card
ISO 7816 -3 Class B Card Support	Reader capable of reading 3 V powered smart card
ISO 7816 -3 Class C Card support	Reader capable of reading 1.8 V powered smart card
ISO 7816-1 Compliant	Specification for the reader

Table 28. Contacted smart-card reader specifications (continued)

Capability	Description
ISO 7816 -2 Compliant	Specification for smart card device physical characteristics (size, location of connection points, and so on)
T=0 support	Cards support character-level transmission
T=1 support	Cards support block-level transmission
EMVCo Compliant	Compliant with EMVCo (for electronic payment standards) smart card standards published to EMVCo Site
EMVCo Certified	Formally certified based on EMVCO smart card standards
PC/SC operating system interface	Personal Computer or Smart Card specification for integration of hardware readers into personal computer environments
CCID driver compliance	Common driver support for Integrated Circuit Card Interface Device for OS level drivers
Windows Certified	Device certified by Microsoft WHCK
FIPS 201 (PIV/HSPD-12) Compliant via GSA	Device compliant with FIPS 201/PIV/HSPD-12 requirements
FIDO2 compliance	Dell ControlVault 3 Smart-card reader is compliant with the FIDO SPEC

Contactless smart-card reader

This section lists the contactless smart-card reader specifications of your Dell Pro Precision 5 14S PW514260.

Table 29. Contactless smart-card reader specifications

Capability	Description
FeliCa Card Support	Reader and software capable of supporting FeliCa contactless cards
ISO 14443 Type A Card Support	Reader and software capable of supporting ISO 14443 Type A contactless cards
ISO 14443 Type B Card Support	Reader and software capable of supporting ISO 14443 Type B contactless cards
ISO/IEC 21481	Reader and software capable of supporting ISO/IEC 21481 compliant contactless cards and tokens
ISO/IEC 18092	Reader and software capable of supporting ISO/IEC 18092 compliant contactless cards and tokens
ISO 15693 Card Support	Reader and software capable of supporting ISO 15693 contactless cards
NFC Tag Support	Supports reading and processing of NFC compliant tag information
NFC Reader Mode	Support for NFC Forum Defined Reader mode
NFC Writer Mode	Support for NFC Forum Defined Writer mode
NFC Peer-to-Peer Mode	Support for NFC Forum Defined Peer-to-Peer mode
EMVCo Compliant	Compliant with EMVCO smart card standards as published to EMVCo Site
EMVCo Certified	Formally certified based on EMVCO smart card standards
NFC Proximity OS Interface	Enumerates NFP (Near Field Proximity) device for operating system to utilize

Table 29. Contactless smart-card reader specifications (continued)

Capability	Description
PC/SC OS interface	Personal Computer/Smart Card specification for integration of hardware readers into personal computer environments
CCID driver compliance	Common driver support for Integrated Circuit Card Interface Device for operating system level drivers
Windows Certified	Device compatible with Windows operating systems
Dell ControlVault support	The device connects to Dell ControlVault for usage and processing
FIDO2 compliance	Dell ControlVault 3 Smart-card reader is compliant with the FIDO SPEC

Table 30. Supported cards

Manufacturer	Card
HID	jCOP readertest3 A card (14443a)
	1430 1L
	DESFire D8H
	iClass (Legacy)
	iClass SEOS
NXP/MIFARE	MIFARE DESFire 8K White PVC Cards
	MIFARE Classic 1K White PVC Cards
	NXP MIFARE Classic S50 ISO Card
G&D	idOnDemand - SCE3.2 144K
	SCE6.0 FIPS 80K Dual+ 1 K Mifare
	SCE6.0 nonFIPS 80K Dual+ 1 K Mifare
	SCE6.0 FIPS 144K Dual + 1K Mifare
	SCE6.0 nonFIPS 144K Dual + 1 K Mifare
	SCE7.0 FIPS 144K
Oberthur	idOnDemand - OCS5.2 80K
	ID-One Cosmo 64 RSA D V5.4 T = 0 card

Operating and storage environment

This table lists the operating and storage specifications of your Dell Pro Precision 5 14S PW514260.

Airborne contaminant level: G1 as defined by ISA-S71.04-1985

Table 31. Computer environment

Description	Operating	Storage
Temperature range	0°C to 35°C (32 °F to 95°F)	-40°C to 65°C (-40°F to 149°F)
Relative humidity (maximum)	10% to 90% (non-condensing)	0% to 95% (non-condensing)
Vibration (maximum)*	0.66 GRMS	1.30 GRMS
Shock (maximum)	110 G†	160 G†

Table 31. Computer environment (continued)

Description	Operating	Storage
Altitude range	-15.2 m to 3048 m (-49.87 ft to 10,000 ft)	-15.2 m to 10,668 m (-49.87 ft to 35,000 ft)
CAUTION: Operating and storage temperature ranges may differ among components, so operating or storing the device outside these ranges may impact the performance of specific components.		

* Measured using a random vibration spectrum that simulates the user environment.

† Measured using a 2 ms half-sine pulse.

Dell low blue light display

WARNING: Prolonged exposure to blue light from the display may lead to long-term effects such as eye strain, eye fatigue, or damage to the eyes.

Blue light is a color in the light spectrum which has a short wavelength and high energy. Chronic exposure to blue light, particularly from digital sources may disrupt sleep patterns and cause long-term effects such as eye strain, eye fatigue, or damage to the eyes.

The display on this computer is designed to minimize blue light and complies with TÜV Rheinland's requirement for low blue light displays.

Low blue light mode is enabled at the factory, so no further configuration is necessary.

To reduce the risk of eye strain, it is also recommended that you:

- Position the display at a comfortable viewing distance between 20 and 28 inches (50 cm and 70 cm) from your eyes.
- Blink frequently to moisten your eyes, wet your eyes with water, or apply suitable eye drops.
- Take an extended break for 20 minutes every two hours.
- Look away from your display, and gaze at a distant object at 20 ft (609.60 cm) away for at least 20 seconds during each break.

Dell Optimizer

Dell Optimizer is an AI-based software application that allows you to customize your computer settings for power and battery, and more.

For Dell Pro Precision 5 14S PW514260 with Dell Optimizer, you can:

- Extend the battery life of your computer with Intelligent Battery Extender and Dynamic Charge.
- Tune the performance, power consumption, cooling, and fan noise with selectable thermal modes.
- Access and secure your computer depending on your physical presence.
- Download and redeem the apps that are purchased with your computer.

For more information about configuring and using these features, search for *Dell Optimizer* at the Dell Support Site.

Dell support policy

For information about Dell support policy, search Dell Support Site.

4

Revision history

Tracks all updates that are made to the document. It typically includes the date of change, version number, and a brief description of the modification. This log helps maintain transparency, accountability, and a clear timeline of progress.

Table 32. Revision history

Revision	Date	Description
A00	05-2026	Original publish date.