
User Manual

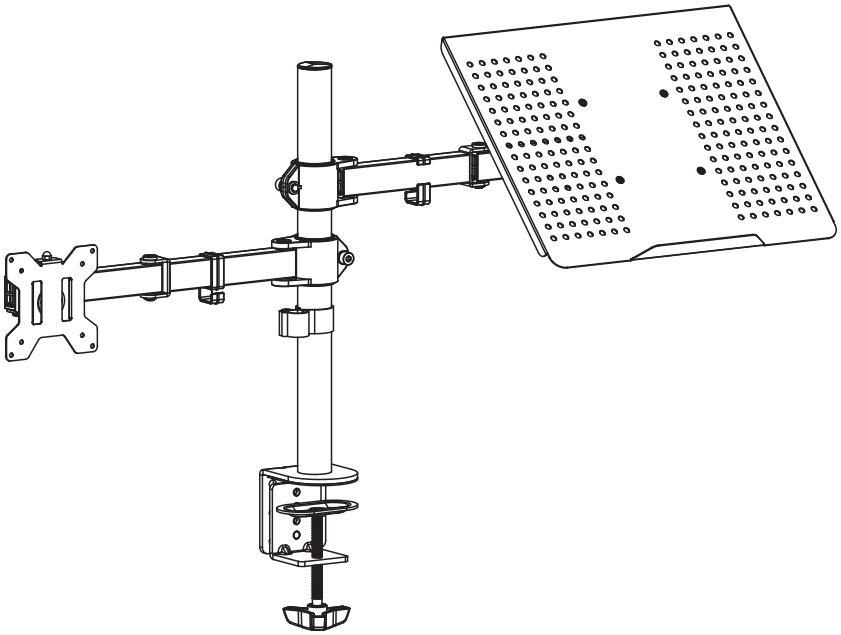

Single Monitor and Laptop Desk Mount

STAND-V002C Series

Individual Product SKUs

STAND-V002C *STAND-V002CW*

⚠ WARNING ⚠

If you do not understand these directions, or if you have any doubts about the safety of the installation, please contact our product support team at 309-278-5303 or help@vivo-us.com for further assistance. Check carefully to make sure there are no missing or defective parts. Failure to report missing parts within 30 days may result in denial of free replacement. Improper installation may cause damage or serious injury. Do not use this product for any purpose that is not explicitly specified in this manual. Do not exceed weight capacity. We cannot be liable for damage or injury caused by improper mounting, incorrect assembly or inappropriate use.



WARNING: CHOKING HAZARD

SMALL PARTS - NOT FOR CHILDREN UNDER 3 YEARS. ADULT SUPERVISION IS REQUIRED.



WEIGHT LIMITS:
Monitor Arm: 22lbs (10kg)
Laptop Tray: 9.9lbs (4.5kg)

DO NOT EXCEED WEIGHT LIMIT. FAILURE TO DO SO MAY RESULT IN SERIOUS INJURY AND DAMAGE TO PROPERTY.



TIPOVER WARNING

SERIOUS OR FATAL CRUSHING INJURIES CAN OCCUR FROM TIPOVER.
TO HELP PREVENT TIPOVER:

- NEVER ALLOW CHILDREN TO CLIMB, STAND, HANG, OR PLAY ON ANY PART OF TV STAND
- USE TIPOVER RESTRAINT OR ANCHOR STAND TO WALL.

NOTE: USE OF TIPOVER RESTRAINTS MAY ONLY REDUCE, BUT NOT ELIMINATE RISK OF TIPOVER.

Need Help? We're Here For You

US-Based Customer Support from Trained Professionals

Monday-Friday from 7am-7pm CST
Saturday 8am-4pm CST



Email Us
help@vivo-us.com



Chat with Live Agent
www.vivo-us.com




Give Us a Call
309-278-5303 ext. 1

Assembly Video & Product Info
www.vivo-us.com/products/stand-v002c


Package Contents



A (x1)
Pole




B (x1)
Clamp



C (x2)
Arm



D (x2)
VESA Plate



E (x1)
Laptop Tray



F (x1)
Grommet Base



G (x1)
Soft Pad



H (x4)
Arm Cable Clip



I (x1)
Pole Cable Clip



J (x1)
Pole Cap

Included Hardware & Tools



S-A (x4)
M4x8 Screw




S-B (x4)
M4 Nut



S-C (x2)
M6 Nut



S-D (x3)
M6x16 Screw



M-A (x8)
M4x12
Thumbscrew



M-B (x8)
M4x30 Screw




M-C (x8)
M4 Spacer



T-A (x1)
3mm Allen
Wrench



T-B (x1)
5mm Allen
Wrench



T-C (x1)
Wrench


Tools Needed



Phillips Screwdriver

Weight Limit:

Monitor Arm: 22lbs (10kg)
Laptop Tray: 9.9lbs (4.5kg)

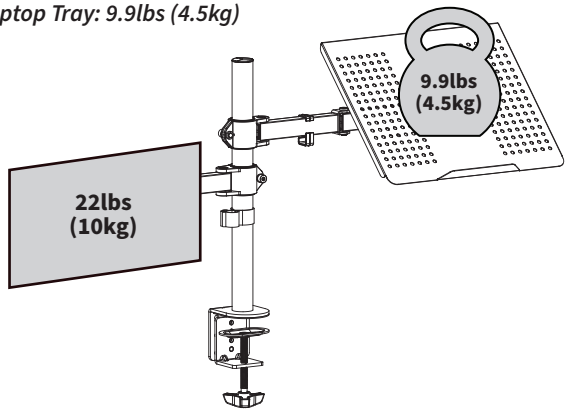

Assembly Steps


STEP 1

– Option 1 –


Clamp Installation

*For desktop thickness of **0.4-3.3”(10-85mm)***

Loosen Clamp Bolt **(B1)** on Clamp **(B)**. Install Clamp to Pole **(A)** using M6x16 Screws **(S-D)** and 3mm Allen Wrench **(T-A)**.

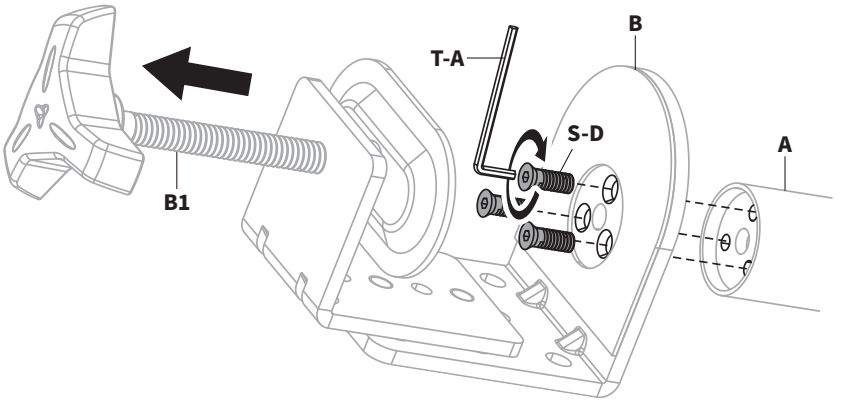

Secure the Clamp Assembly to the desktop.

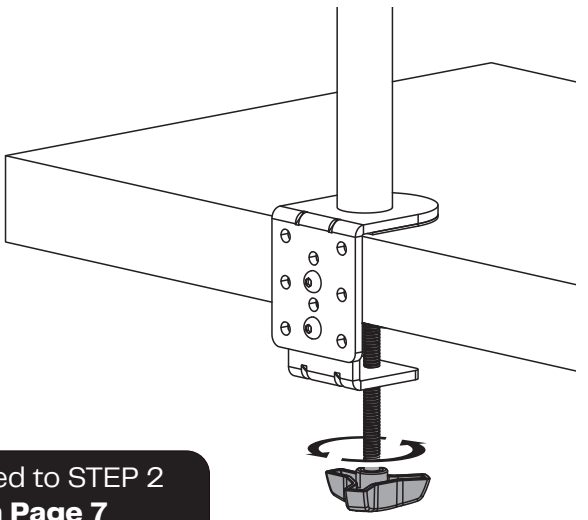


Proceed to STEP 2
on **Page 7**

– Option 2 –


Grommet Installation

*For desktop thickness of **0.4-2.9”(10-75mm)***

Using a Phillips screwdriver, remove the screw from Clamp **(B)** and separate Clamp Bolt **(B1)** and Clamp Plate **(B2)** from the clamp assembly. Thread Clamp Plate onto Clamp Bolt.

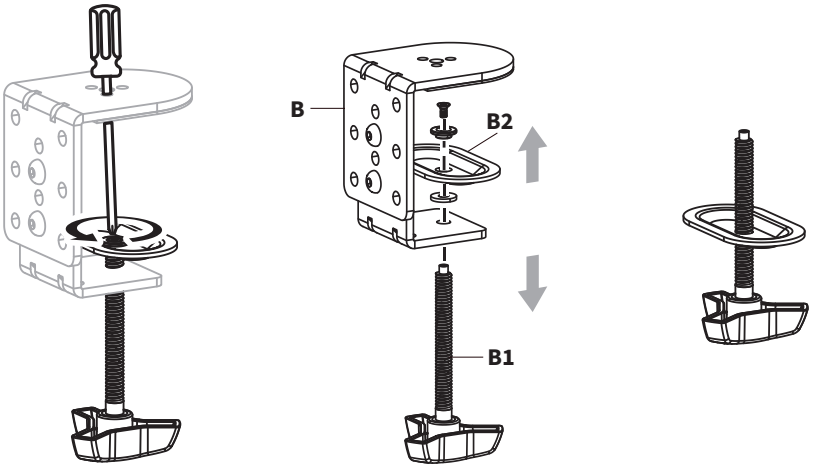


Install Grommet Base **(F)** to Pole **(A)** using M6x16mm Screws **(S-D)** and 3mm Allen Wrench **(T-A)**. Remove adhesive backing from Soft Pad **(G)** and stick it to the bottom of Grommet Base **(F)**.

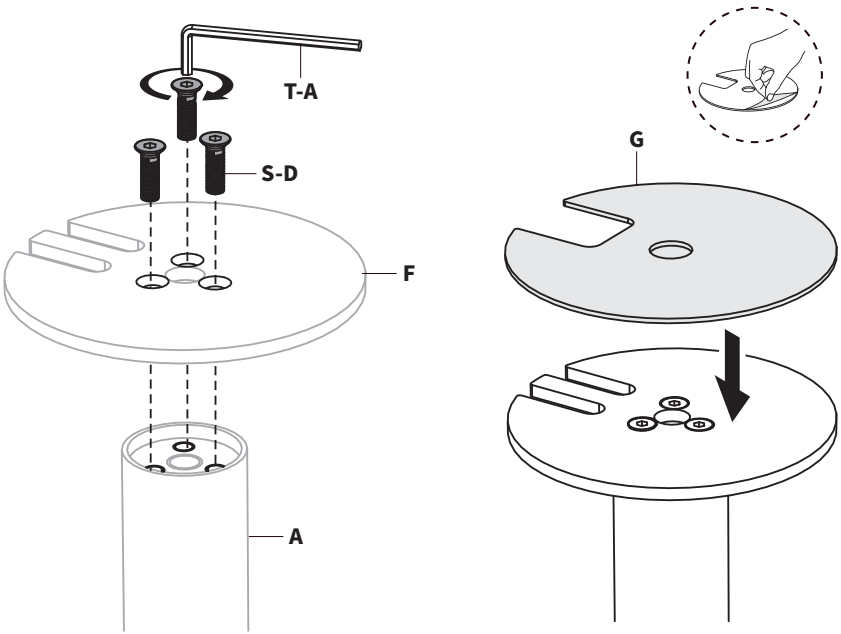

Grommet Installation – Cont'd

Thread Clamp Bolt **(B1)** with Clamp Plate **(B2)** through the mounting hole and into Pole **(A)**.

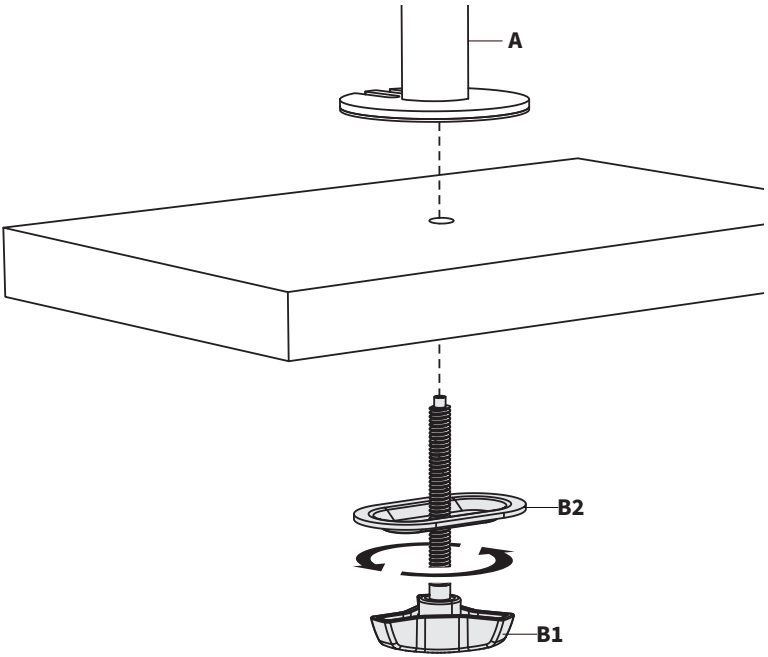




Don't Have a Grommet Hole?

If you do not have an existing hole for installation, drill a hole through your desktop in your desired mounting location using a 3/8" (10mm) drill bit.


STEP 2

Slide Arms **(C)** over Pole **(A)** and secure at desired heights using 5mm Allen Wrench **(T-B)**. Insert Pole Cap **(J)** into the top of Pole **(A)**.

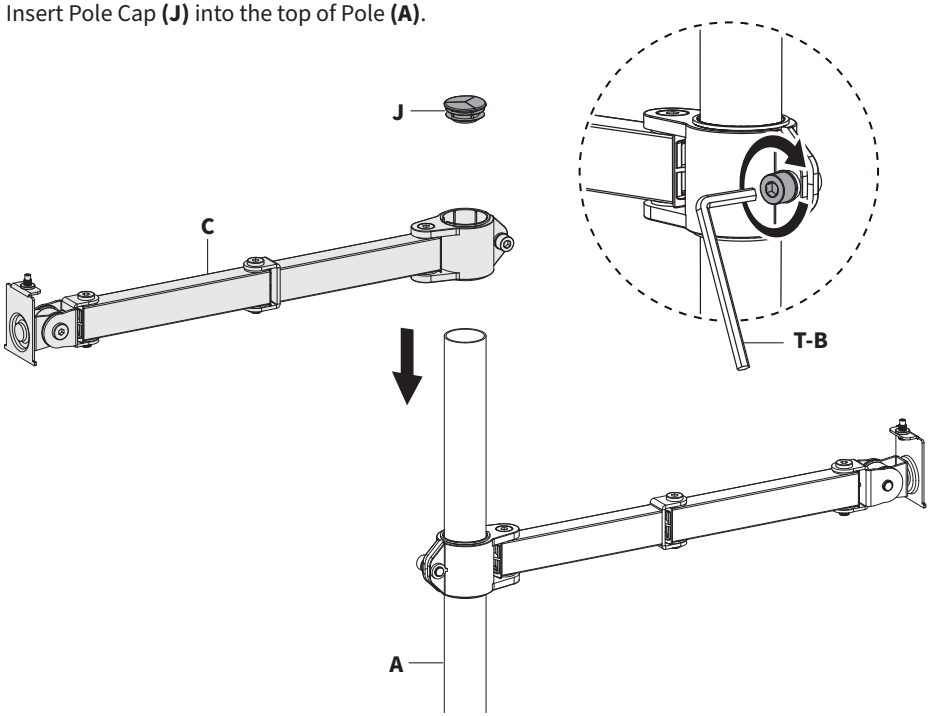


STEP 3


Attach Arm Cable Clips **(H)** to Arms **(C)** and Pole Cable Clip **(I)** to Pole **(A)**.

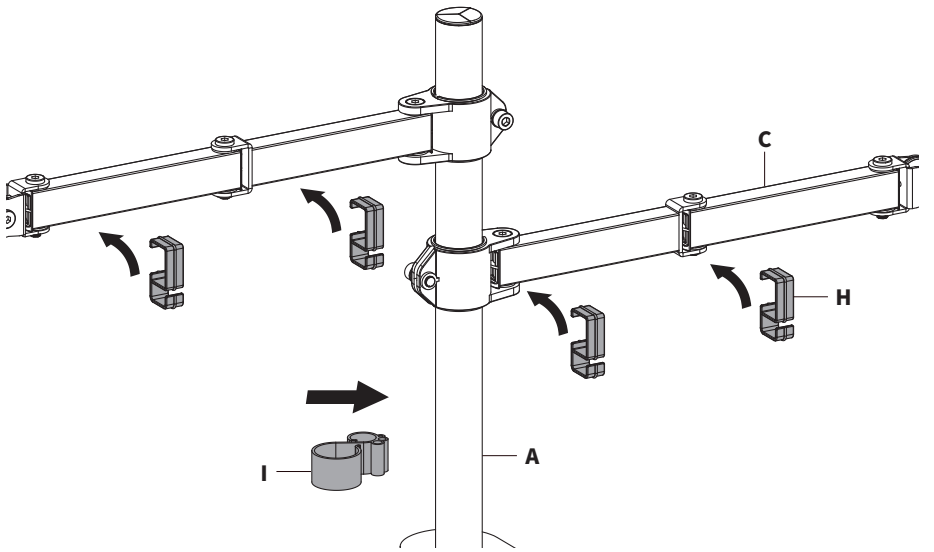


STEP 4

Attach VESA Plate **(D)** to the back of the monitor using M4x12 Thumbscrews **(M-A)** or M4x30 Screws **(M-B)** with M4 Spacers **(M-C)**.

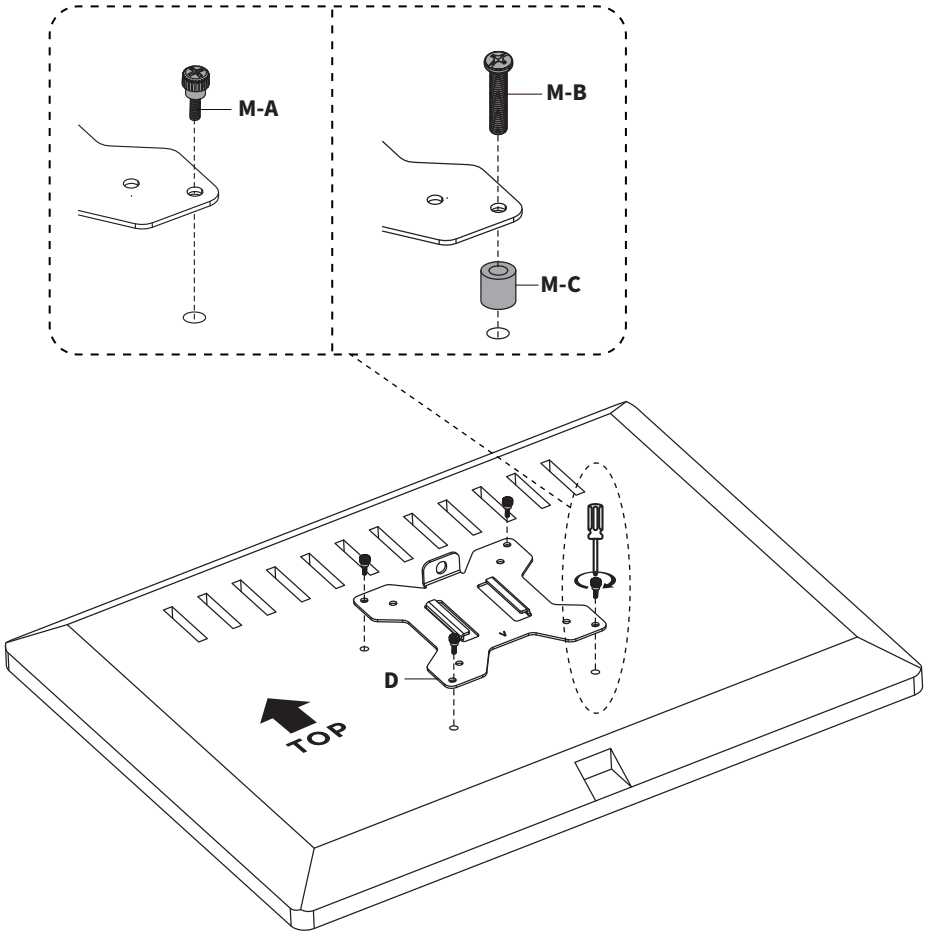

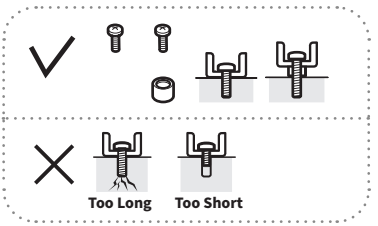




Ensure the **Lip** on VESA Plate is on the top.


STEP 5

Assemble VESA Plate **(D)** to Laptop Tray **(E)** using M4x8 Screws **(S-A)** and M4 Nuts **(S-B)**. Tighten using Wrench **(T-C)** and a Phillips screwdriver.

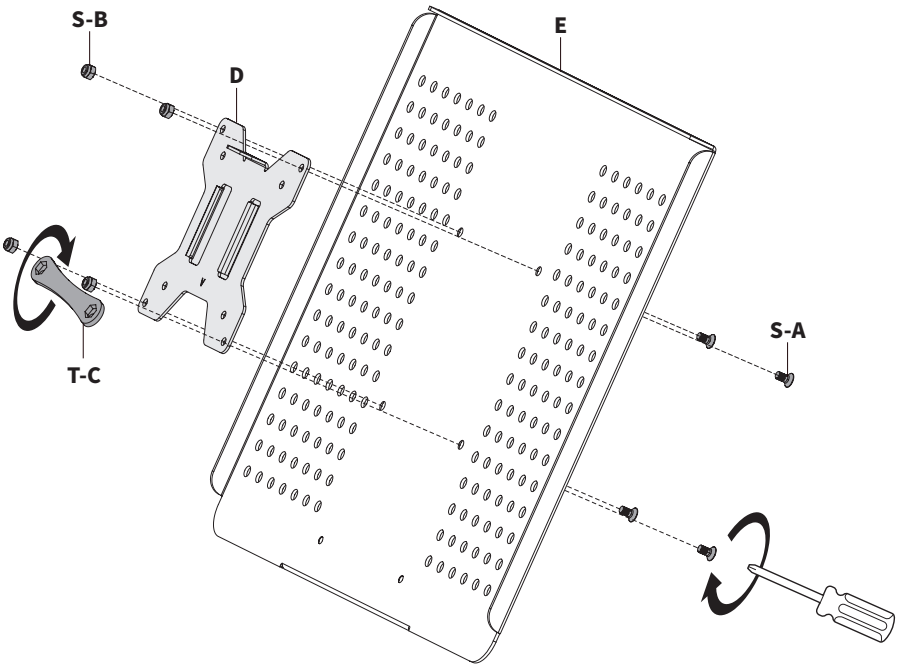


STEP 6

Slide VESA Plates **(D)** onto Arms **(C)**. Secure the assembly in place using M6 Nuts **(S-C)**.

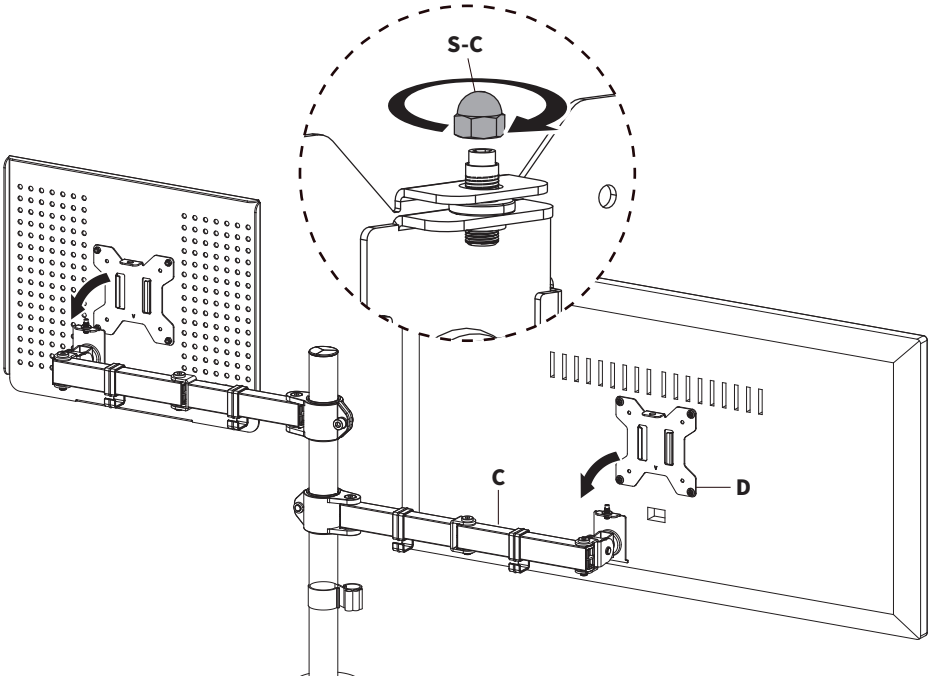

STEP 7


Place your laptop on Laptop Tray **(E)**.

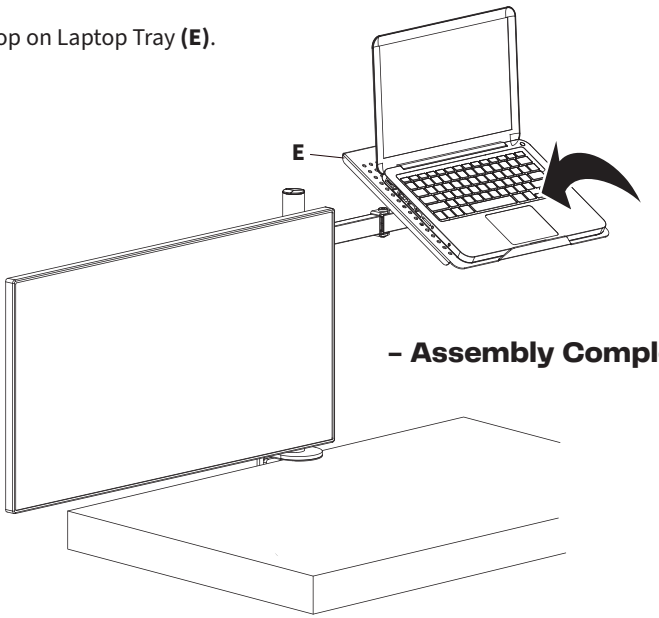


– Assembly Complete! –

Adjustments

Use 5mm Allen Wrench **(T-B)** to adjust tension of tilt angle.

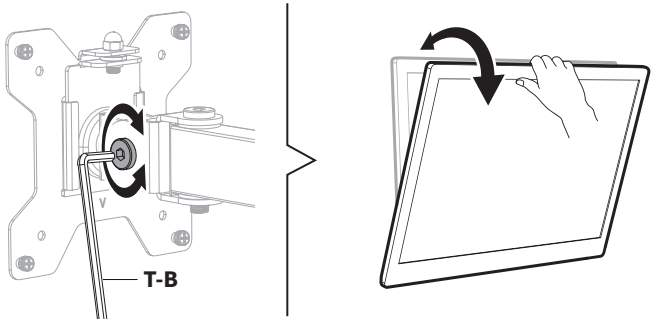

Your monitor can be swung and rotated by hand.

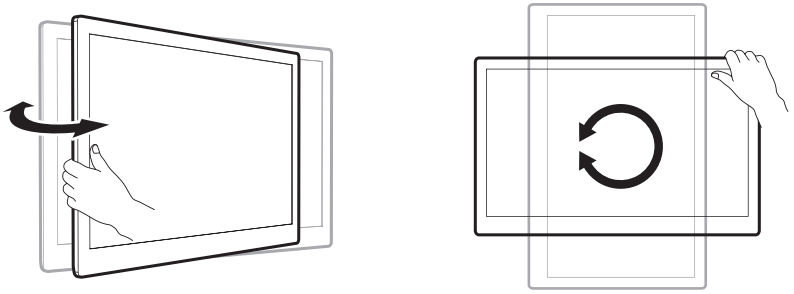

LAST UPDATED: 7/7/25
REV3
STAND-V002C: v3.2
STAND-V002CW: vMixed



Need Help? **We're Here For You**

Monday-Friday from 7am-7pm CST
Saturday 8am-4pm CST



Email Us
help@vivo-us.com



Chat with Live Agent
www.vivo-us.com



Give Us a Call
309-278-5303 ext. 1



VIVO-us



@vivo_us



@VIVOus



VIVO

FOR MORE GREAT VIVO PRODUCTS,
CHECK OUT OUR WEBSITE AT: WWW.VIVO-US.COM