
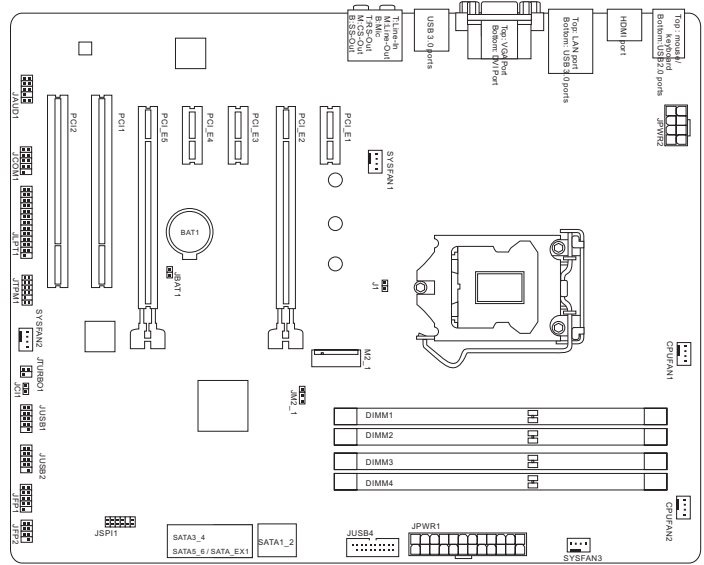


# Z97S SLI Krait Edition

## (MS-7922v2.0) ATX Motherboard

Supports 4th and 5th Generation Intel® Core™ Processors, and Intel® Pentium® and Celeron® Processors for Socket LGA1150

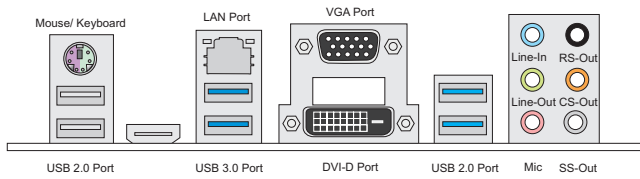

### Motherboard Specification

<p><b>Processor Support</b></p> <ul style="list-style-type: none"> <li>Supports 4th and 5th Generation Intel® Core™ Processors, and Intel® Pentium® and Celeron® Processors for Socket LGA1150</li> </ul> <p><b>Base Clock</b></p> <ul style="list-style-type: none"> <li>100 MHz</li> </ul> <p><b>Chipset</b></p> <ul style="list-style-type: none"> <li>Intel® Z97 Express Chipset</li> </ul> <p><b>Memory Support</b></p> <ul style="list-style-type: none"> <li>Support 4 DDR3 3200(OC)/ 3100(OC)/ 3000(OC)/ 2800(OC)/2666(OC)/ 2600(OC)/ 2400(OC)/ 2200(OC)/ 2133(OC)/ 2000(OC)/1866(OC)/ 1600/ 1333/ 1066 MHz up to 32GB max</li> <li>Supports Dual-Channel mode</li> </ul> <p><b>LAN</b></p> <ul style="list-style-type: none"> <li>Supports LAN 10/100/1000 Fast Ethernet by Realtek® RTL8111G</li> </ul> <p><b>Audio</b></p> <ul style="list-style-type: none"> <li>Chip integrated by Realtek® ALC892</li> <li>Flexible 8-channel audio with jack sensing</li> <li>Compliant with Azalia 1.0 Spec</li> </ul> <p><b>SATA</b></p> <ul style="list-style-type: none"> <li>6 SATA 6Gb/s (SATA1~SATA6) ports by Intel® Z97</li> </ul> <p><b>SATA Express Slot</b></p> <ul style="list-style-type: none"> <li>1 SATA Express port by Intel® Z97 (switch form SATA 5-6)</li> </ul> <p><b>M.2 Slot</b></p> <ul style="list-style-type: none"> <li>Support PCIE M.2 Storage by Intel® Z97 (switch from SATA5-6)</li> </ul> <p><b>USB 3.0</b></p> <ul style="list-style-type: none"> <li>6 USB 3.0 ports by Intel® Z97 (rear x 4, front x 2)</li> </ul> <p><b>Connectors</b></p> <ul style="list-style-type: none"> <li>Back panel <ul style="list-style-type: none"> <li>1 PS/2 mouse/ keyboard combo port</li> <li>2 USB 2.0 ports</li> <li>4 USB 3.0 ports</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>1 VGA port</li> <li>1 DVI port</li> <li>1 HDMI port</li> <li>1 LAN port</li> <li>6 flexible audio ports</li> </ul> <p><b>On-Board</b></p> <ul style="list-style-type: none"> <li>2 USB 2.0 connectors</li> <li>1 USB 3.0 connector</li> <li>1 Chassis Intrusion connector</li> <li>1 Serial port connector</li> <li>1 Front Panel Audio connector</li> <li>1 Parallel port connector</li> <li>1 TPM Module connector</li> <li>2 4-pin CPU fan connectors</li> <li>3 4-pin system fan connectors</li> <li>2 System panel connectors</li> </ul> <p><b>Slots</b></p> <ul style="list-style-type: none"> <li>2 PCIE x16 slots</li> <li>3 PCIE x1 slots</li> <li>2 PCI slots</li> </ul> <p><b>Form Factor</b></p> <ul style="list-style-type: none"> <li>ATX (30.48 x 24.38 cm)</li> </ul> <p><b>Feature on Focus</b></p> <ul style="list-style-type: none"> <li>M-Flash</li> <li>PCIE 3.0</li> <li>PCIE M.2 Storage Support</li> <li>SATA 6Gb/s</li> <li>Super Charger</li> <li>SATA Express</li> <li>USB3.0</li> <li>2 Way Cross Fire</li> <li>2 WAY SLI</li> <li>Click BIOS 4</li> <li>OC Genie 4</li> <li>Total Fan Control</li> </ul> <p><b>Mounting</b></p> <ul style="list-style-type: none"> <li>9 mounting holes</li> </ul>
--	--

These specification is subject to change without prior notice.