



# RAZER LEVIATHAN V2 X

MASTER GUIDE

Light up your setup with an audio experience like never seen before. Meet the **Razer Leviathan V2 X**—a compact, USB Type C powered PC gaming soundbar that makes a worthy addition to your battlestation for all your games, movies, and music.

CONTENTS

1. WHAT'S INSIDE ..... 3

2. WHAT'S NEEDED ..... 4

3. LET'S GET YOU COVERED ..... 4

4. TECHNICAL SPECIFICATIONS..... 5

5. SETTING UP YOUR RAZER LEVIATHAN V2 X..... 6

6. CONNECTING TO YOUR SOUNDBAR ..... 7

7. USING THE SOUNDBAR ..... 9


8. CONFIGURING YOUR RAZER LEVIATHAN V2 X VIA RAZER SYNAPSE ..... 13

9. SAFETY AND MAINTENANCE .....24

10. LEGALESE.....25

## 1. WHAT'S INSIDE


- Razer Leviathan V2 X

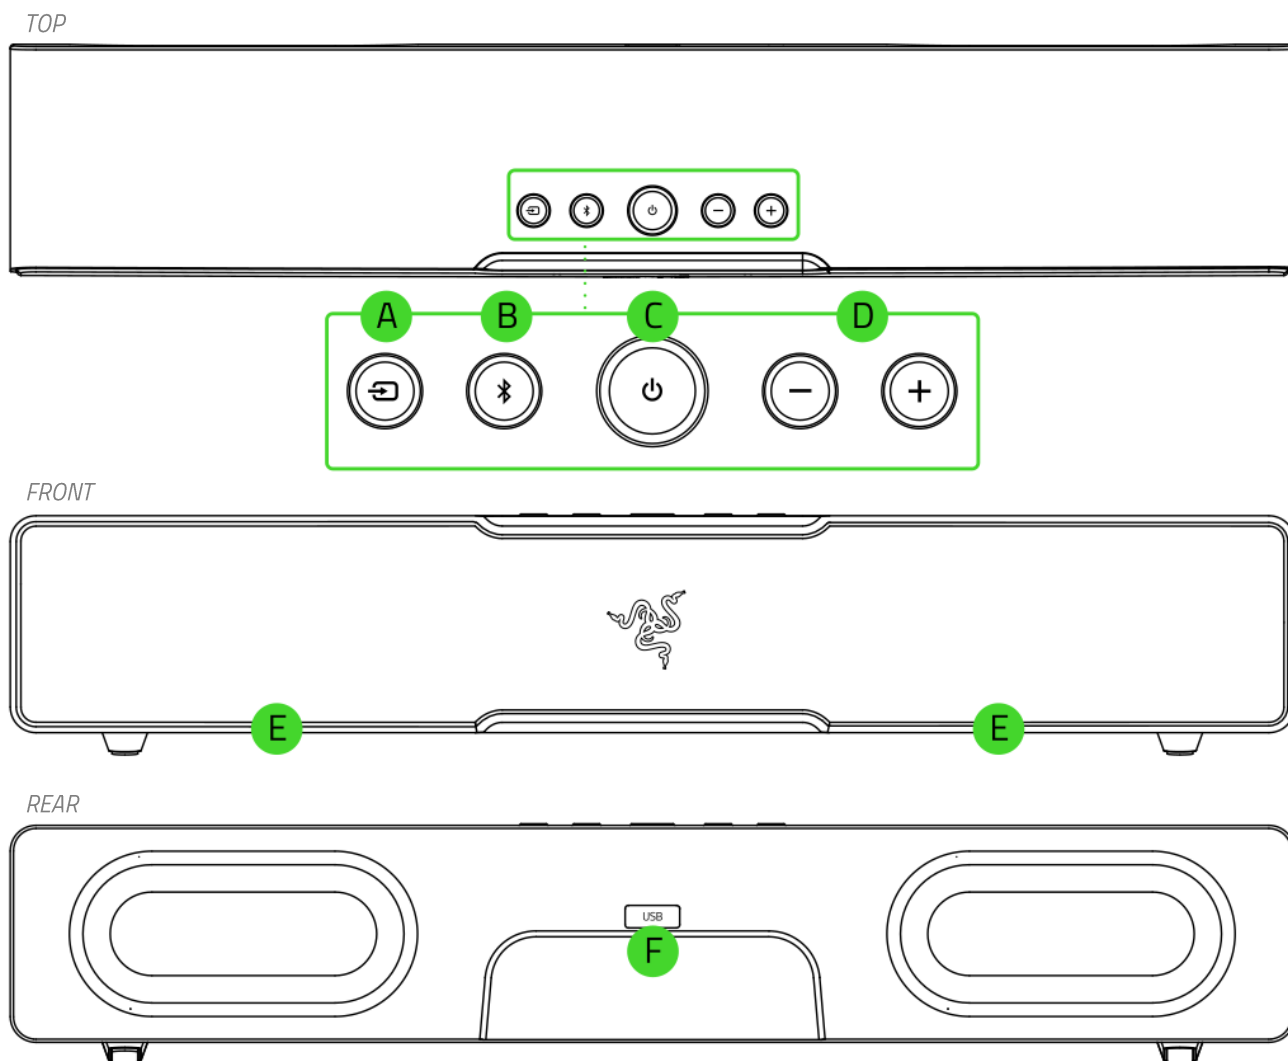

- A. Source button
- B. Bluetooth button
- C. Power button
- D. Volume control buttons

- E. Soundbar lighting Powered by Razer Chroma™ RGB
- F. Type C port

- Type C cable

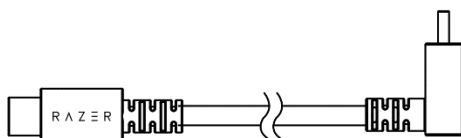

- Important Product Information Guide

---

## 2. WHAT'S NEEDED

### PRODUCT REQUIREMENTS

- Type C port or devices with Bluetooth connectivity

### RAZER SYNAPSE REQUIREMENTS

- Windows® 10 64-bit (or higher)
- Internet connection for software installation

### RAZER AUDIO APP REQUIREMENTS

- iOS 13 / Android 10 (or higher) device with Bluetooth connectivity
- Internet connection for app installation


---

## 3. LET'S GET YOU COVERED



Register your product and score exclusive benefits

[razerid.razer.com/warranty](https://razerid.razer.com/warranty)

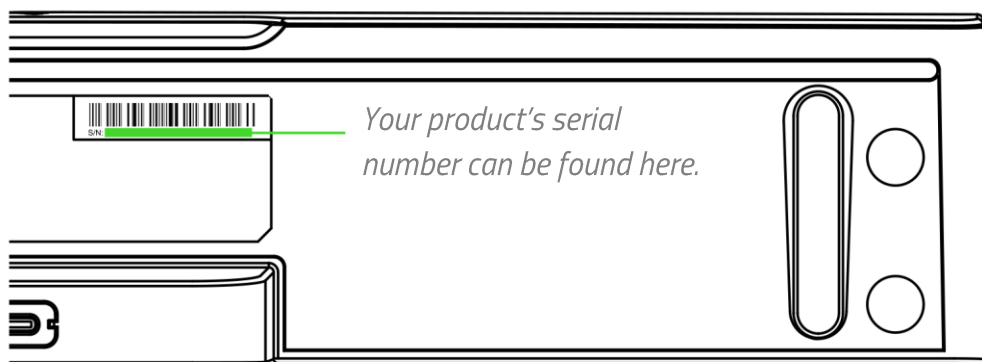

---


## 4. TECHNICAL SPECIFICATIONS

- Razer Chroma™ RGB (14 zones)
- Bluetooth 5.0
- USB audio input
- Razer Audio app
- Customizable EQ
- Frequency Response: 85 Hz – 20 kHz
- Max SPL: 90 dB
- Input Power: USB Type C with Power Delivery
- Driver specifications:
  - Full Range Racetrack Drivers: 2 x 2 x 4" / 2x 48 x 95 mm
  - Passive Radiator: 2 x 2 x 4.1" / 2 x 48 x 105 mm
- Driver Type: Full range drivers, passive radiator
- Connectivity:
  - Bluetooth connection
  - USB connection to PC
  - Toggle PC Audio Devices (supported via Razer Synapse)


---

## 5. SETTING UP YOUR RAZER LEVIATHAN V2 X

1. Position the soundbar on a flat, stable surface as required in your setup.

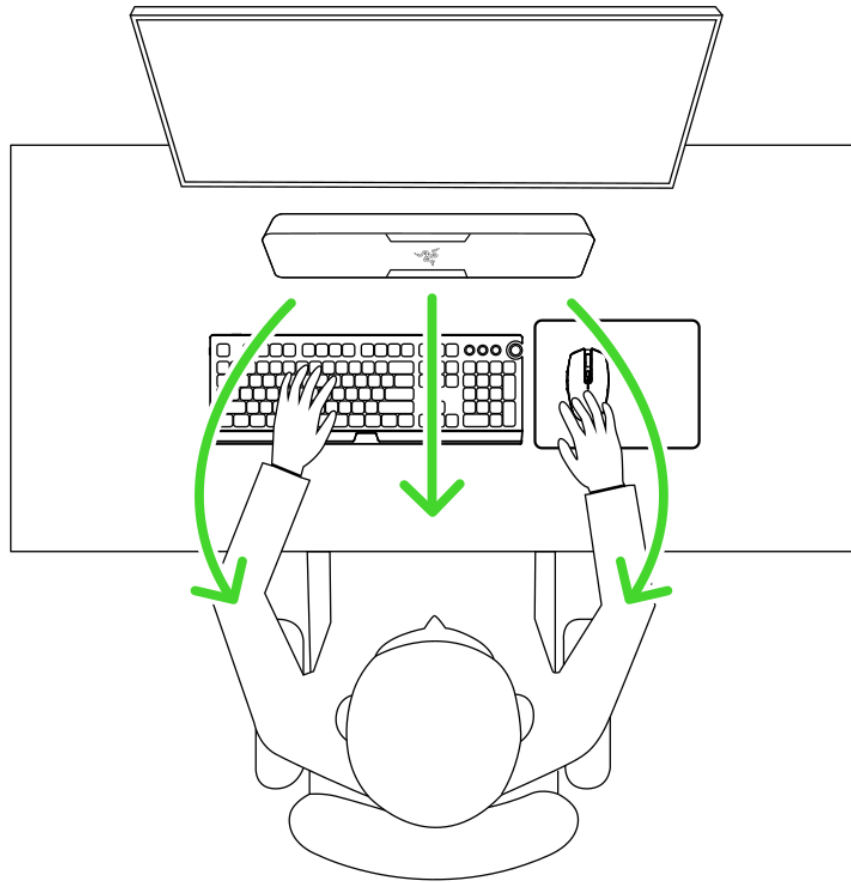

2. Connect the soundbar to any of the Type C ports on your PC.

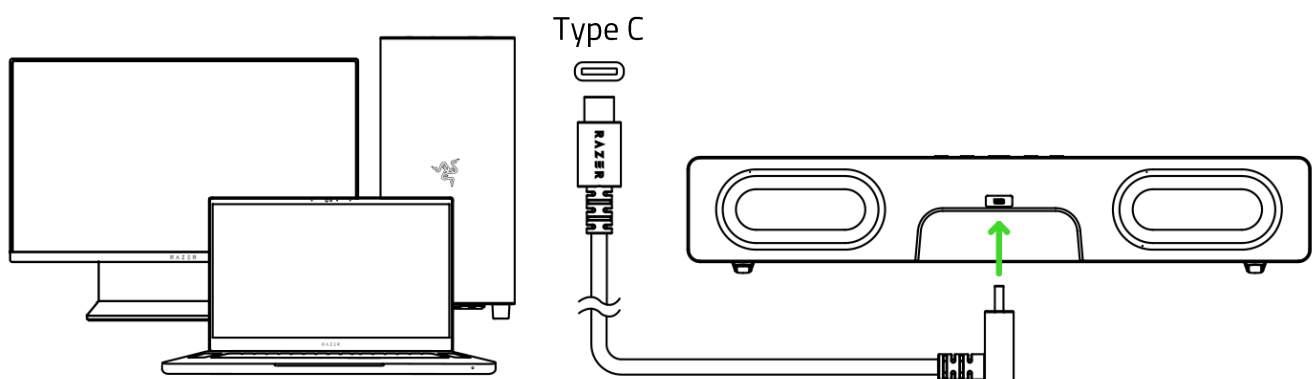


**i** Install Razer Synapse when prompted or download the installer from [razer.com/synapse](https://www.razer.com/synapse).

---

## 6. CONNECTING TO YOUR SOUNDBAR


### A. TO A PC VIA PC MODE

1. Press the power button to power on the soundbar. The soundbar lighting will briefly turn solid green, indicating that the soundbar is in PC mode.

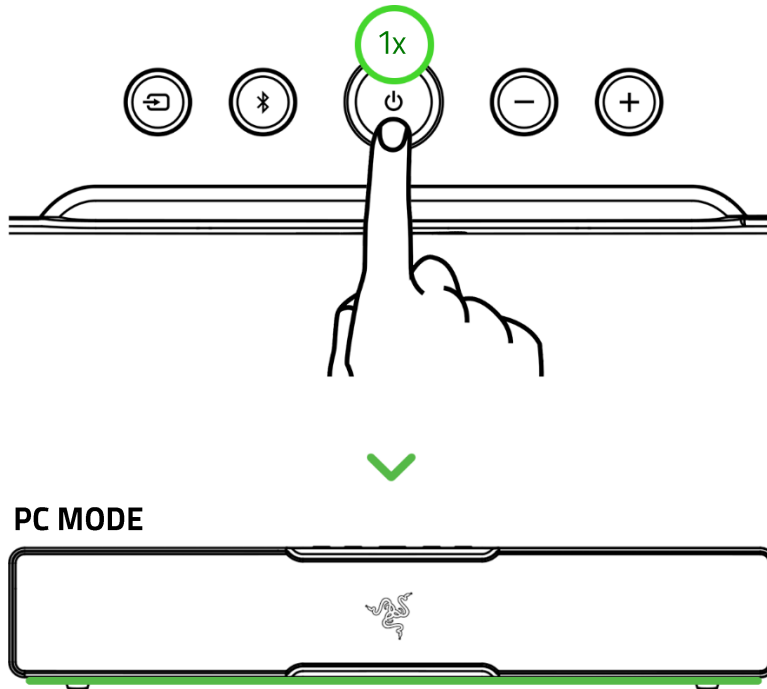

**i** Make sure the soundbar is connected to a Type C port on your PC. PC mode (solid green) will only be displayed briefly before showing spectrum cycling (default) or its current lighting effect.

2. Set the Razer Leviathan V2 X as the default **Output** device on your PC.

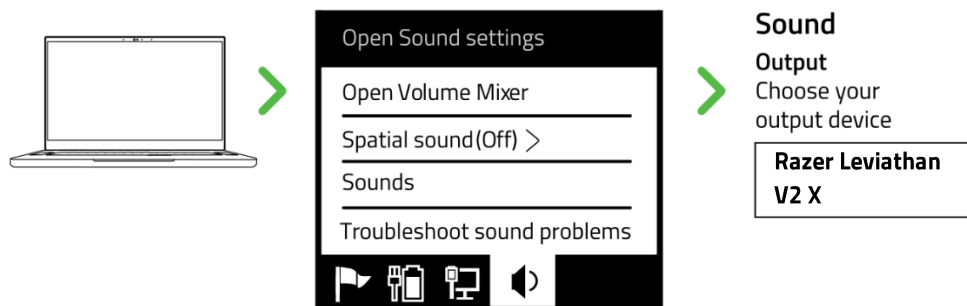


**i** When using the soundbar with compatible devices, set the Razer Leviathan V2 X as its default output device (if applicable).


The Razer Leviathan V2 X is now ready for use in PC mode.

## B. TO OTHER DEVICES VIA BLUETOOTH MODE


1. While powered on and in PC mode, press the Bluetooth button to switch to Bluetooth mode. The soundbar lighting will scroll back and forth to indicate that the soundbar is in pairing mode.

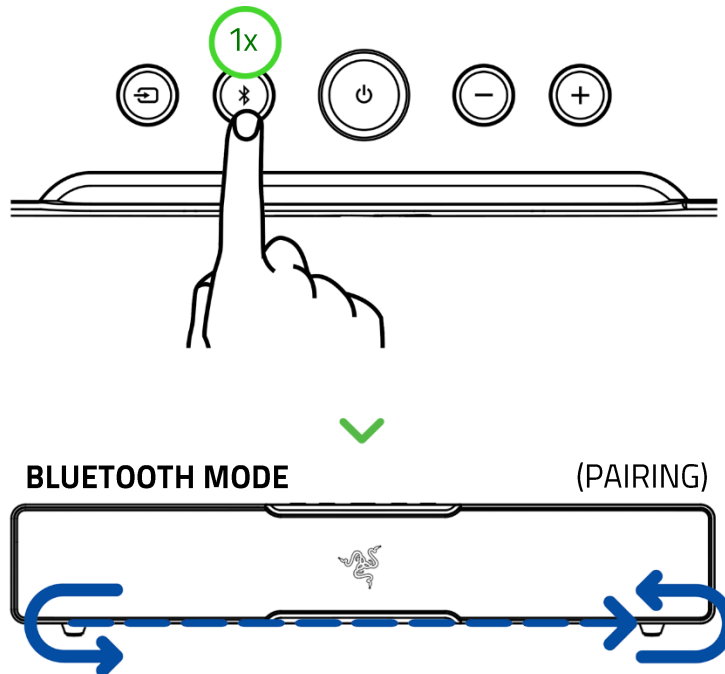

2. Activate Bluetooth on your device and select "**Razer Leviathan V2 X (BT)**" from the list of devices found.

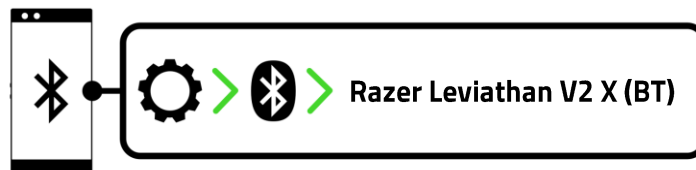

3. Wait until both devices are connected. The soundbar lighting will briefly show solid blue to indicate that the soundbar is now connected to your device.

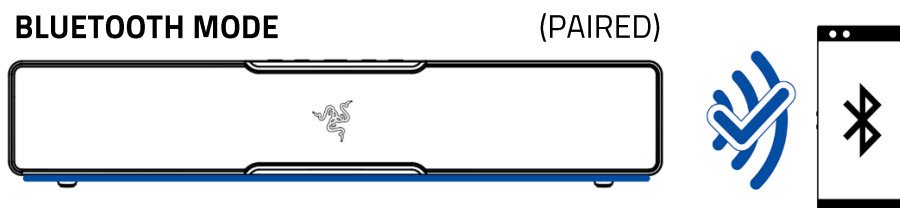

**i** Bluetooth mode (connected, solid blue) will only be displayed briefly before showing spectrum cycling (default) or its current lighting effect.


The Razer Leviathan V2 X is now ready for use in Bluetooth mode.

---

## 7. USING THE SOUNDBAR

### POWER BUTTON

Press the Power button to power on or off the soundbar. The soundbar lighting will diverge in green when powered on or converge in red when powered off.

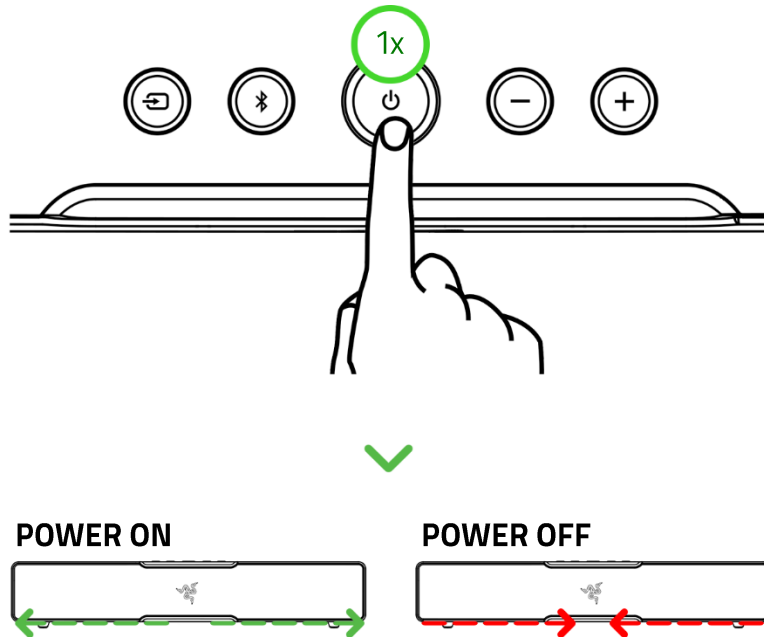


**i** The last audio source will be active when the soundbar is powered on.

### SOURCE BUTTON

#### Switching between audio sources


While powered on, press the Source button to switch between PC mode and Bluetooth mode.

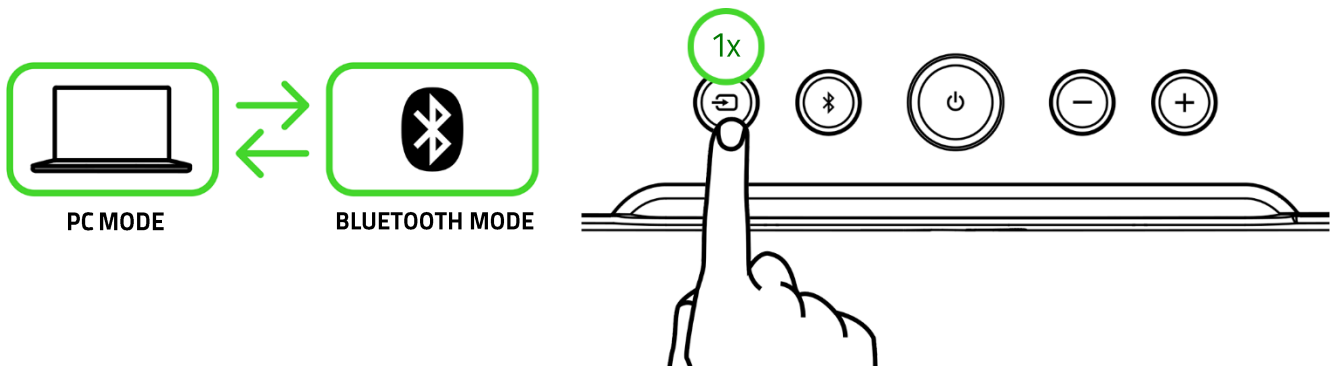

**i** When switching to Bluetooth mode, soundbar lighting will briefly show solid blue when the soundbar reconnects to your device; pairing mode will be activated when no devices are found.

## Toggling between PC audio devices (PC mode only)


While powered on and in PC mode, press and hold the Source button to switch between the soundbar and a selected secondary PC playback device on Razer Synapse. [Learn more about PC audio device toggling](#)

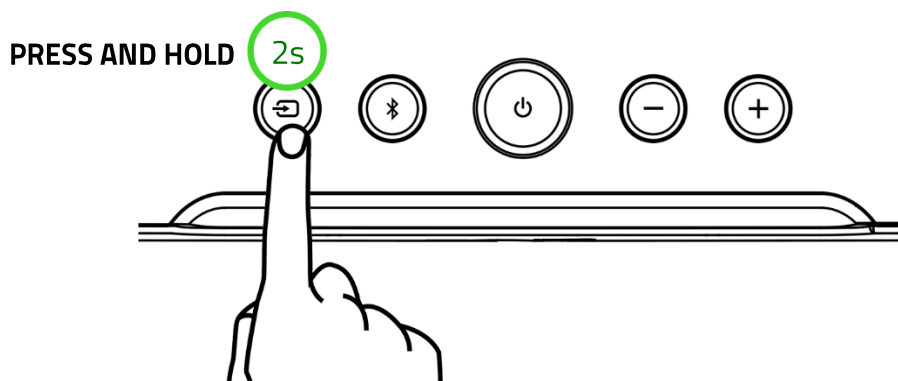

## BLUETOOTH BUTTON


### Reactivating Bluetooth pairing mode (for new devices)

1. While in Bluetooth mode, press and hold the Bluetooth button for 5 seconds to activate pairing mode.

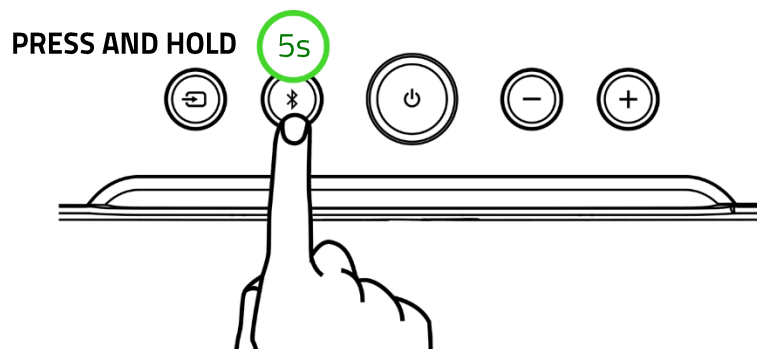

**BLUETOOTH MODE**

(PAIRING)

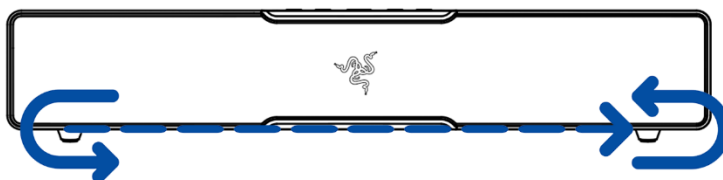


**i** Bluetooth pairing mode can only be activated from Bluetooth mode.

2. Activate Bluetooth on your device and select "**Razer Leviathan V2 X (BT)**" from the list of devices found.




3. Wait until both devices are connected. The soundbar lighting will briefly show solid blue to indicate that the soundbar is now connected to your device.

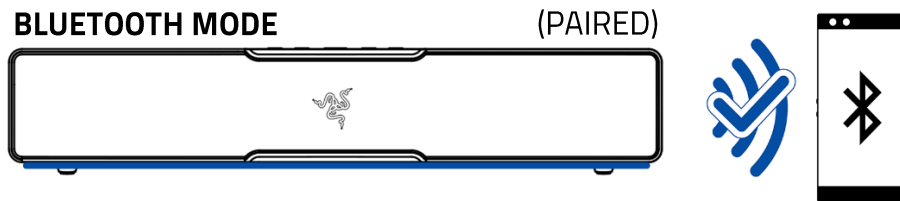

### Switching to Bluetooth mode

When in PC mode, press the Bluetooth button to switch to Bluetooth mode and reconnect the soundbar to the last known device. The soundbar lighting will briefly turn solid blue to indicate that the soundbar is now connected to your device.

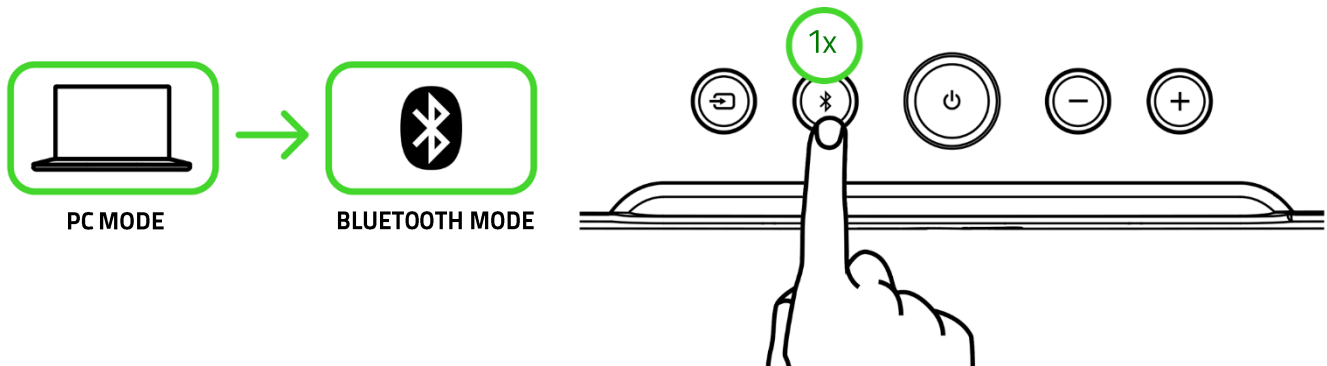

**i** The soundbar will activate Bluetooth pairing mode when no device is found.


## Other functions

Other Bluetooth button functions are available when the soundbar is powered on with Bluetooth as the audio source.

|              |                |
|--------------|----------------|
| Single press | Play/pause     |
| Double press | Skip track     |
| Triple press | Previous track |

## VOLUME CONTROL BUTTONS

Press the volume control buttons to adjust the volume of the current audio mode. The soundbar lighting will briefly show the current volume level before diverging or converging as you increase or decrease its volume.

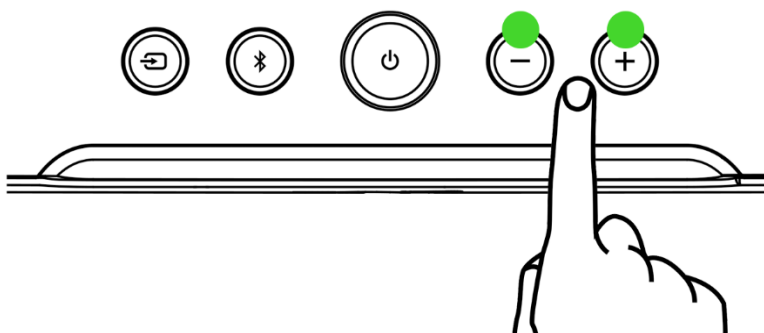

## PERSONALIZE YOUR EXPERIENCE

### Razer Synapse (PC)

Use the Razer Synapse app to tweak the soundbar's RGB lighting and audio settings to best suit your entertainment needs.

**i** Only available on Windows® 10 64-bit (or higher).

### Razer Audio app (Mobile)

Conveniently switch from your PC to your mobile devices, mute or adjust the soundbar's volume, change its EQ settings using presets or your own setting, and much more via the Razer Audio app.



Razer Audio



## 8. CONFIGURING YOUR RAZER LEVIATHAN V2 X VIA RAZER SYNAPSE


**i** Internet connection is required for installation, updates, and cloud-based features. Registering for a Razer ID account is recommended but optional. All listed features are subject to change based on the current software version, the connected device(s), and supported apps and software.

### SYNAPSE TAB

The Synapse tab is your default tab when you first launch Razer Synapse. This tab allows you to navigate the Dashboard subtab.


#### Dashboard

The Dashboard subtab is an overview of your Razer Synapse, where you can access all your Razer devices, modules, and online services.

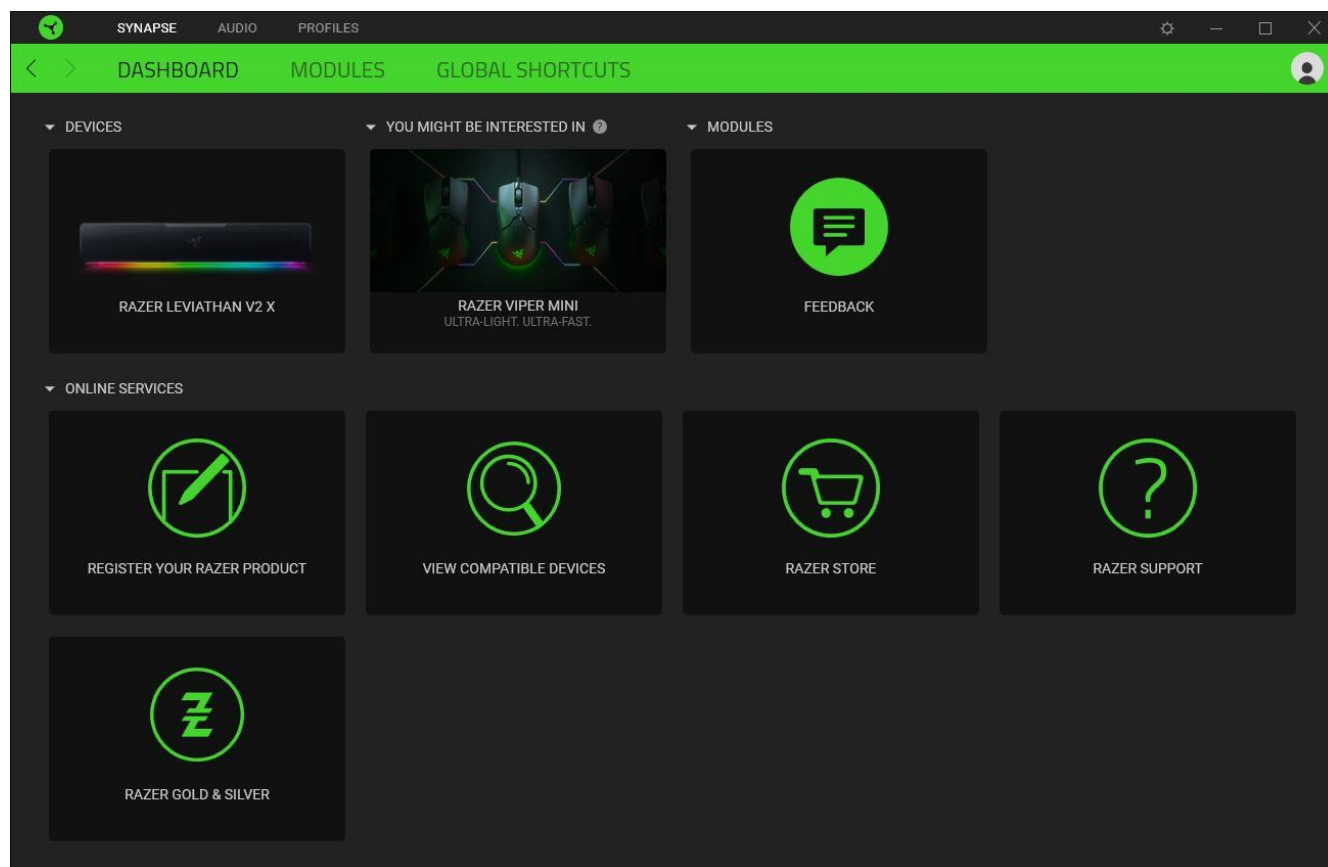

## Modules


The Modules subtab displays all installed and available modules for installation.

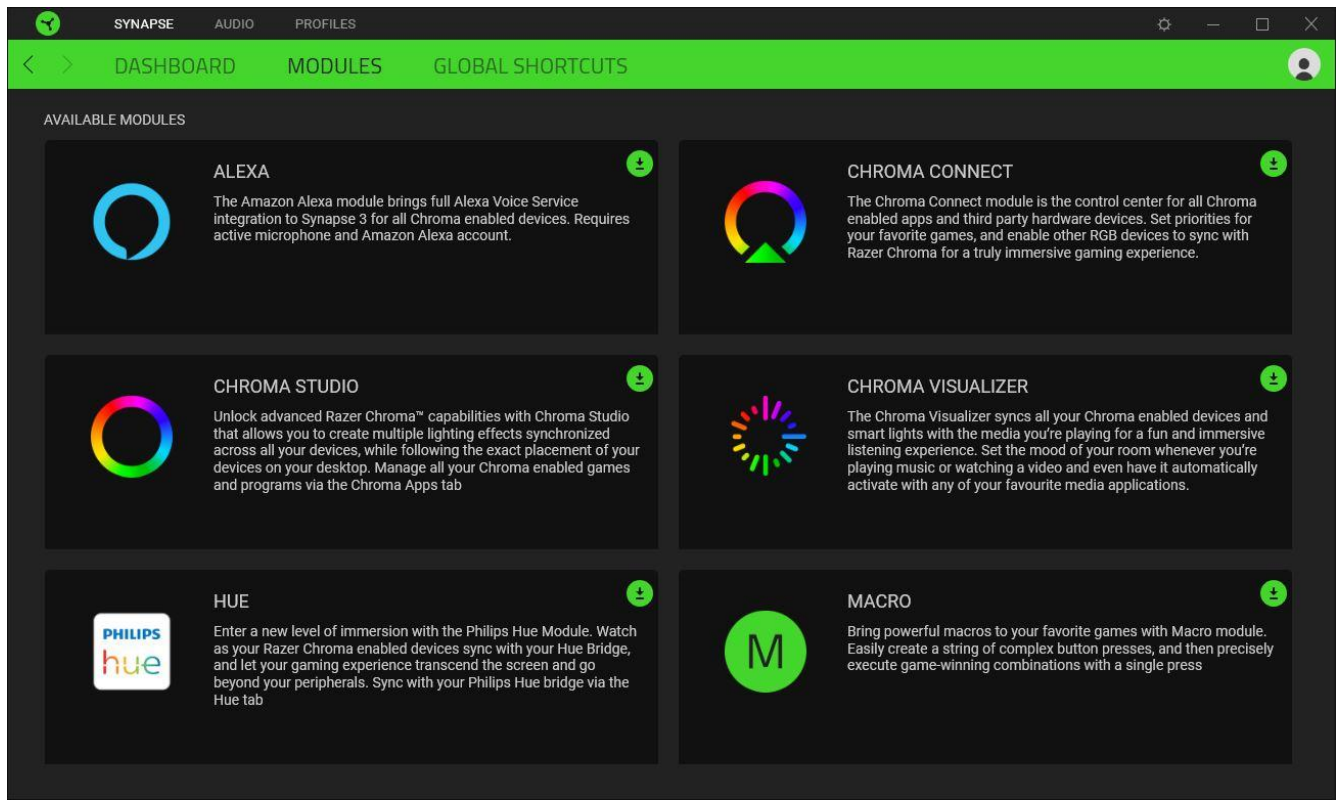

## Global Shortcuts

Bind operations or Razer Synapse functions to custom key-combinations from any Razer Synapse-enabled device inputs, which apply across all device profiles. [Learn more about Profiles](#)

**!** *Only Razer Synapse-enabled device inputs will be recognized.*

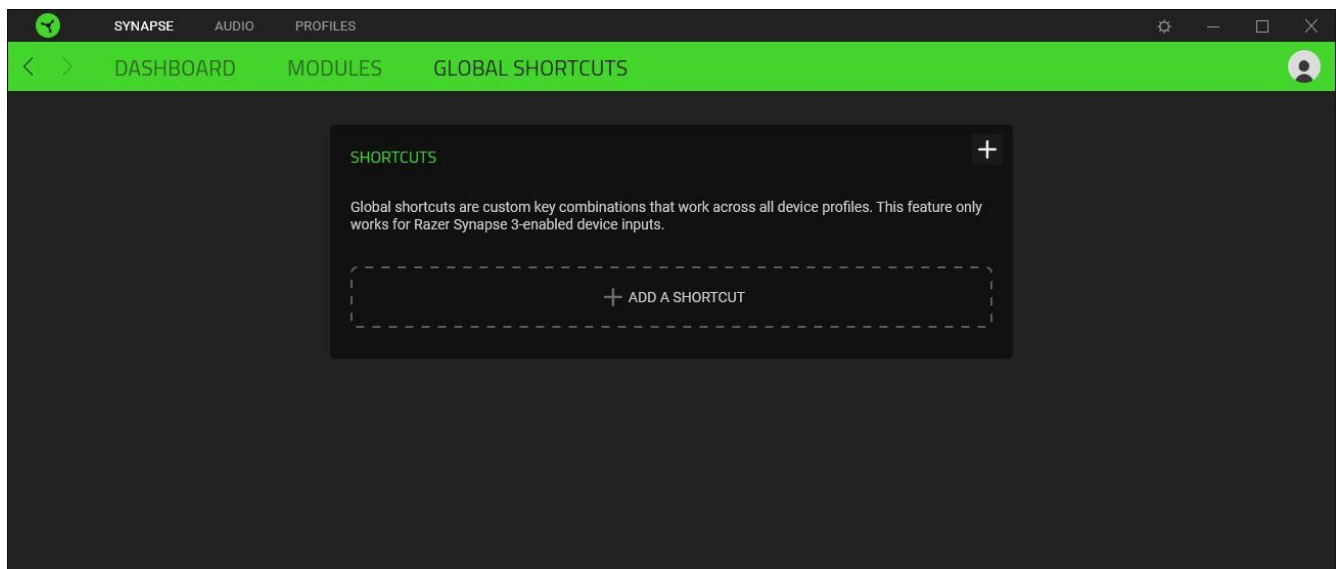


## AUDIO TAB

The Audio tab is the main tab for your Razer Leviathan V2 X. From here, you can customize your soundbar's settings to unleash its full potential. Changes made under this tab are automatically saved to your system and cloud storage.

### Sound

The Sound subtab is for adjusting the soundbar's volume, setting a secondary playback device, switching to Bluetooth audio source, and changing its audio equalizer using presets or your own setting.

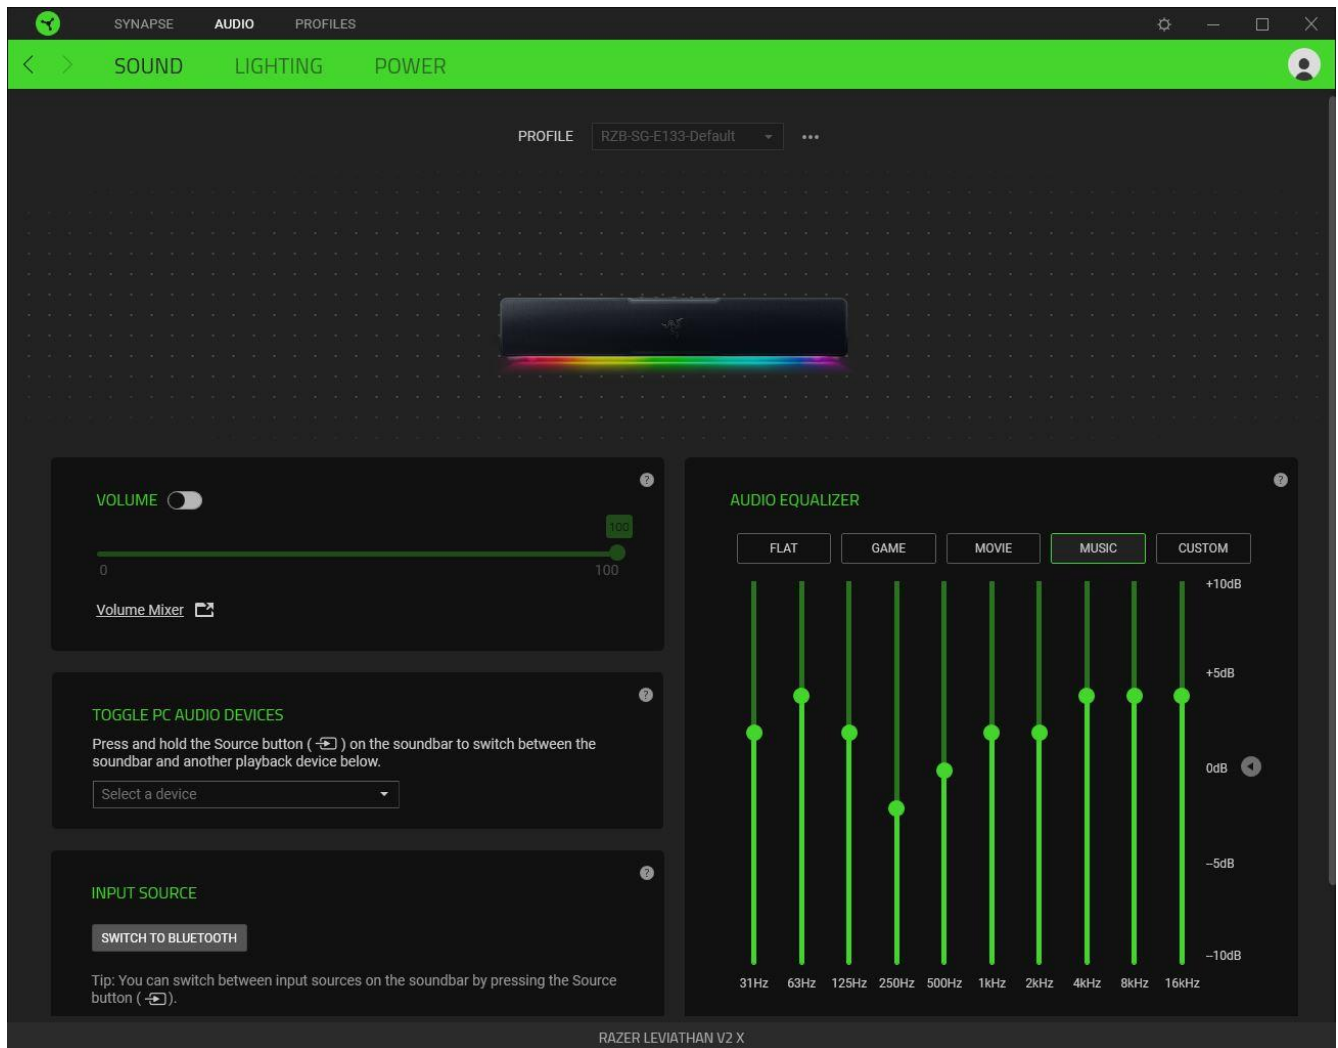

### Profile

Profile is a data storage for keeping all your Razer peripheral's settings. By default, the profile name is based on your system's name. To add, rename, duplicate, or delete a profile, simply press the Miscellaneous button ( ●●● ).

### Volume

Adjust the audio volume of the soundbar. You may also access the Windows volume mixer of the current playback device, where you can proportionally adjust the overall volume of the system or individually adjust the volume of each active application.

### Toggle PC audio devices

Set a secondary playback device that you can immediately switch audio with when you press and hold the Source button on the soundbar.

### Input source

Allows you to set the soundbar to Bluetooth mode using Razer Synapse.


 *Razer Synapse won't be able to revert to PC mode when the soundbar has been set to Bluetooth mode. To set the soundbar to PC mode, press the Source button on the soundbar.*

### Audio equalizer

Select any available equalizer preset created for the best audio experience designed for balance, gaming immersion, movie viewing, or enjoying your favorite music. Manually adjusting any equalizer preset will automatically set it to Custom.

## Lighting

The Lighting subtab enables you to customize the lighting on the soundbar.

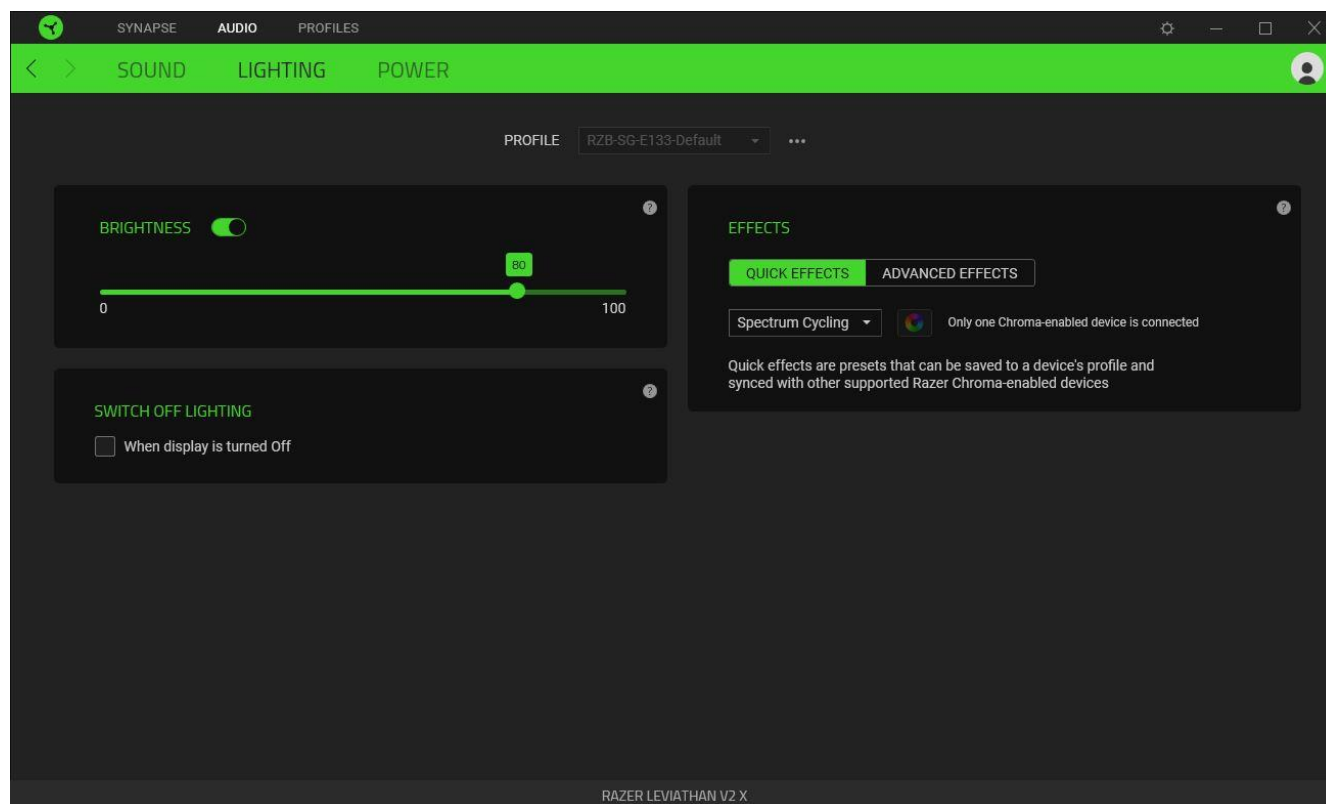

### Brightness

You can turn off the soundbar lighting by toggling the Brightness option or increase/decrease the luminance using the slider.

### Switch Off Lighting

This power-saving tool allows you to disable soundbar lighting when your system's display is turned off.

### Quick Effects

Several quick effects can be selected and applied to your soundbar's lighting, as listed here:

|                                                                                     | Name              | Description                                                                           | How to set up              |
|-------------------------------------------------------------------------------------|-------------------|---------------------------------------------------------------------------------------|----------------------------|
|  | Ambient awareness | The soundbar lighting will reflect the averaged color on the selected screen region   | Select a screen region     |
|  | Audio meter       | The LEDs will light up according to the audio level with a default spectrum of colors | Select a Color Boost level |

|                                                                                   |                  |                                                                                                         |                                                                 |
|-----------------------------------------------------------------------------------|------------------|---------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------|
|  | Breathing        | The soundbar lighting will fade in and out of the selected color(s)                                     | Select up to 2 colors or randomize colors                       |
|  | Fire             | The soundbar lighting will mimic the motion of flames                                                   | No further customization required                               |
|  | Spectrum cycling | The soundbar lighting will cycle between 16.8 million colors indefinitely                               | No further customization required                               |
|  | Starlight        | Each LED on the soundbar lighting will have a chance of fading in and out at a random time and duration | Select up to 2 colors or randomize colors and select a duration |
|  | Static           | The soundbar lighting will remain lit in the selected color                                             | Select a color                                                  |
|  | Wave             | The soundbar lighting will scroll in the direction selected                                             | Select either left-to-right or right-to-left wave direction     |

If you have other supported Razer Chroma-enabled devices, you can synchronize their quick effects with your Razer device by clicking the Chroma Sync button (  ).


 *Only devices that support the selected lighting effect will synchronize.*

### Advanced Effects

The Advanced Effects option allows you to choose a Chroma Effect you want to use on your Razer Chroma-enabled peripheral. To start making your own Chroma Effect, simply press the Chroma Studio button (  ).

## Power

Use the Power subtab to enable the soundbar to enter standby mode when left idle for a certain period.

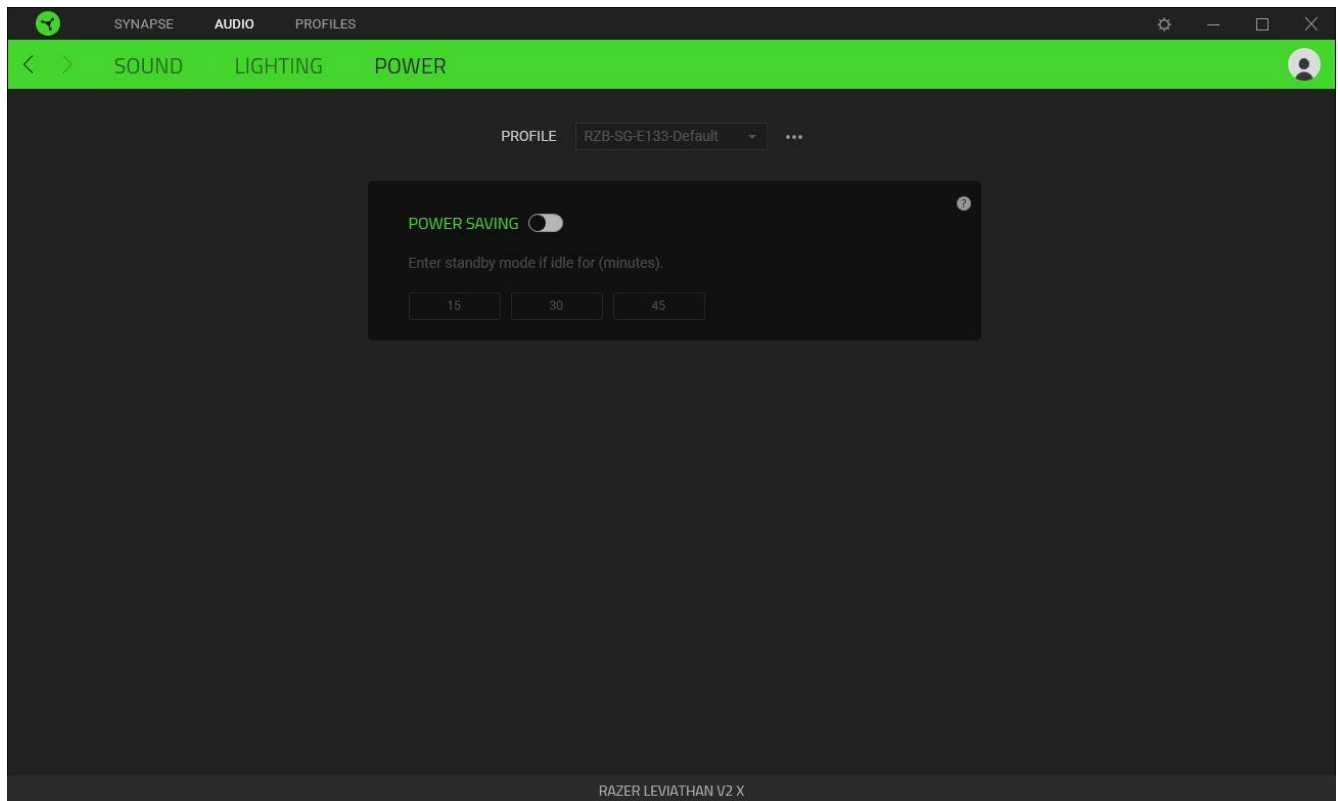


## PROFILES TAB

The Profiles tab is a convenient way to manage all your profiles and link them to your games and applications.

### Devices


View which games are linked to each device's profiles or which Chroma Effect is linked to specific games using the Devices subtab.

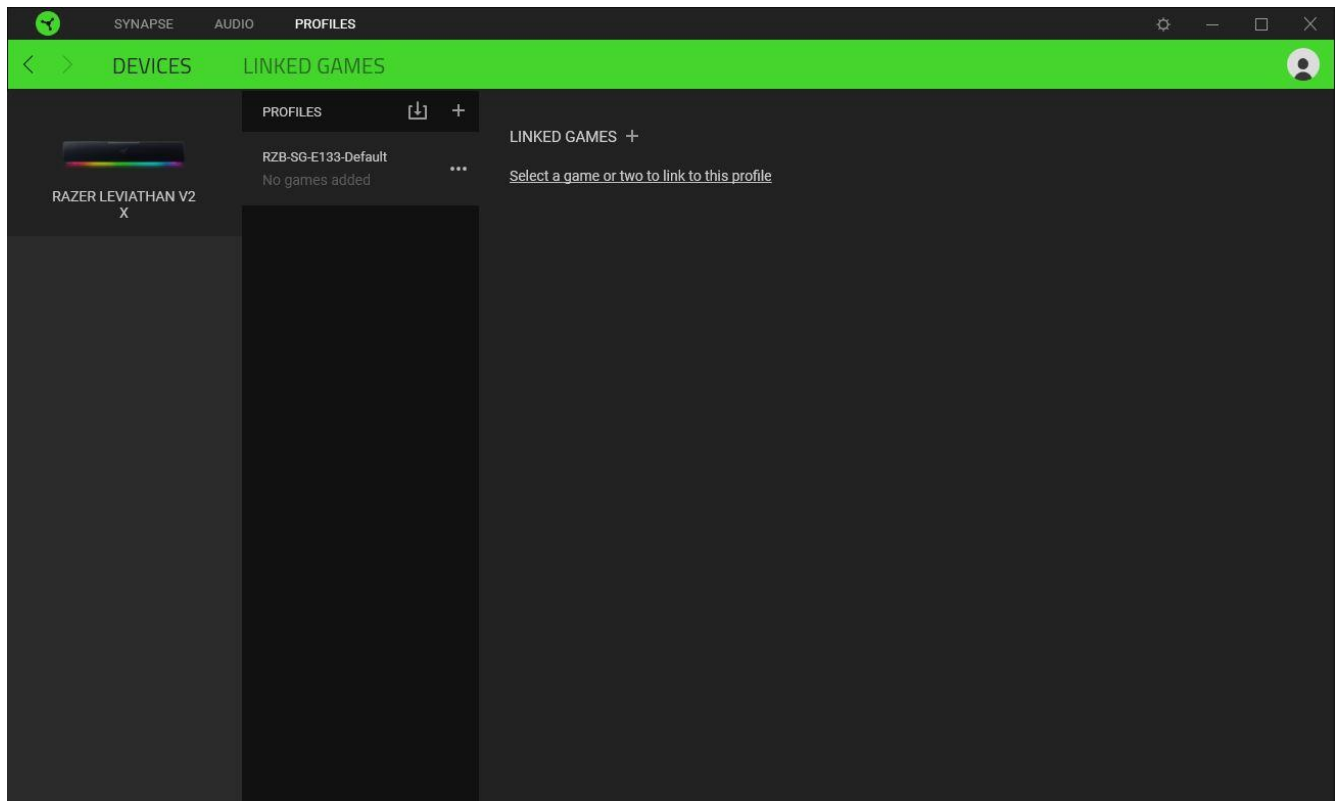

You can import Profiles from your computer or the cloud through the import button (  ) or create new profiles within the selected device using the add button (  ). To rename, duplicate, export, or delete a profile, simply press the Miscellaneous button (  ). Each profile can be set to activate when you run an application using the Linked Games option.

## Linked Games


The Linked Games subtab allows you to add games, view devices linked to games, or search for added games. You can also sort games based on alphabetical order, last played, or most played. Added games will still be listed here, even if they are not linked to a Razer device.

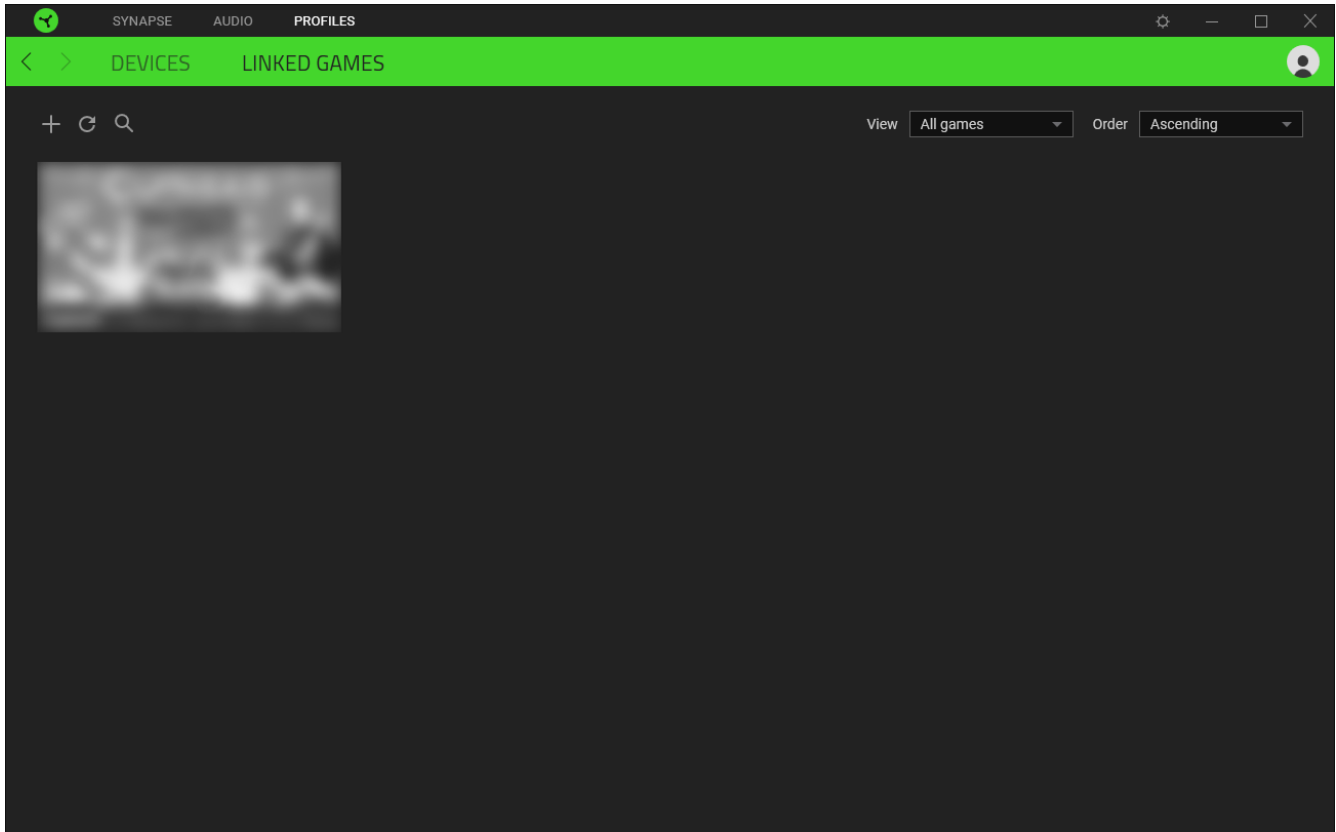

To link games to connected Razer devices or Chroma Effects, simply click on any game from the list, and then click **Select a device and its profile to launch automatically during gameplay** to select the Razer device or Chroma Effect it will link with. Once connected, you may click the Miscellaneous button ( ●●● ) of the corresponding Chroma Effect or device to select a specific Chroma Effect or profile.

## SETTINGS WINDOW

The Settings window, accessible by clicking the (⚙️) button on Razer Synapse, enables you to configure the startup behavior and display language of Razer Synapse, view the master guides of each connected Razer device, or perform a factory reset on any connected Razer device.

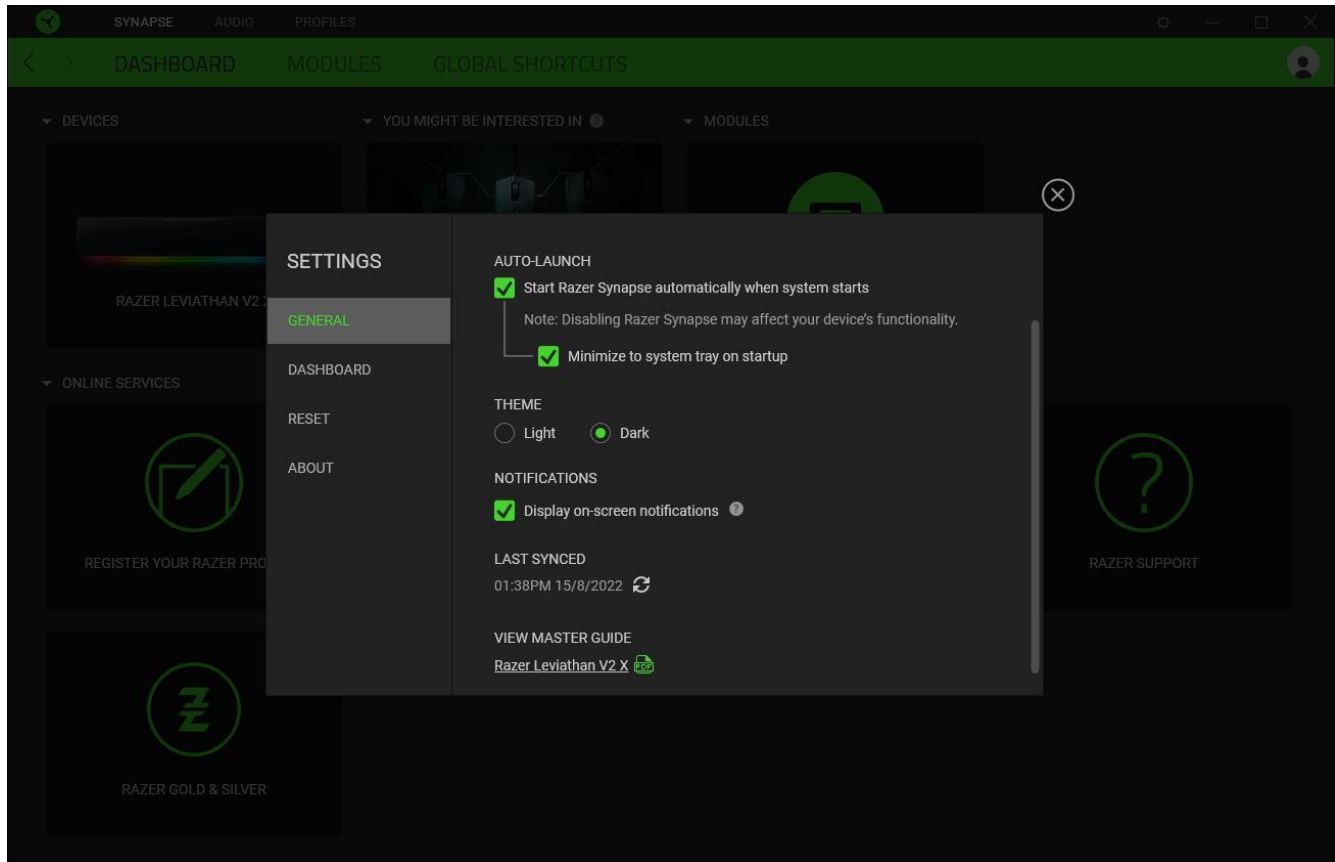

### General tab

The General tab lets you change the software's display language, startup behavior, theme, and on-screen notifications display. You may also manually sync your profiles to the cloud (↻) or view the master guide of all connected Razer devices and installed modules.

### Dashboard tab

Use the Dashboard tab to customize which Razer device recommendations based on your setup, and the games you play will appear on the Dashboard.

### Reset tab

The Reset tab allows you to perform a factory reset on all connected Razer devices with on-board memory and/or reset Razer Synapse tutorials to acquaint yourself again with Razer Synapse's new features on its next launch.



*All profiles stored on the selected device's on-board memory will be erased when you reset a Razer device.*

## **About tab**

The About tab displays brief software information and copyright statement, and provides relevant links for its terms of use. You may also use this tab to check for software updates, or as quick access to Razer's social communities.

---

## 9. SAFETY AND MAINTENANCE

### SAFETY GUIDELINES

To achieve maximum safety while using your Razer Leviathan V2 X, we suggest that you adopt the following guidelines:

- Should you have trouble operating the device properly and troubleshooting does not work, unplug the device and contact the Razer hotline or go to [support.razer.com](https://support.razer.com) for assistance.
- Do not take apart the device and do not attempt to operate it under abnormal current loads. Doing so will void your warranty.
- Keep the device away from liquid, humidity, or moisture. Operate the device only within the specific temperature range of 0°C (32°F) to 40°C (104°F). Should the temperature exceed this range, unplug and/or switch off the device to stabilize the temperature to an optimal level.
- Listening to excessively loud volumes over extended periods can damage your hearing. Furthermore, legislation of certain countries permits a maximum sound level of 86db to affect your hearing for 8 hours a day. We, therefore, recommend that you reduce the volume to a comfortable level when listening for prolonged periods. Please, take good care of your hearing.

### MAINTENANCE AND USE

The Razer Leviathan V2 X requires minimum maintenance to keep it in optimum condition. Once a month, we recommend you clean the soundbar and its subwoofer using a soft cloth or cotton swab to prevent dirt buildup. Do not use soap or harsh cleaning agents.

---

## 10. LEGALESE

### **COPYRIGHT AND INTELLECTUAL PROPERTY INFORMATION**

©2022 Razer Inc. All rights reserved. Razer, the triple-headed snake logo, Razer logo, "For Gamers. By Gamers.", and "Razer Chroma" logo are trademarks or registered trademarks of Razer Inc. or affiliated companies in the United States and other countries. All other trademarks are the property of their respective owners.

Android, Google, Google Logo, Google Play, and the Google Play logo are registered trademarks of Google LLC.

Apple, the Apple logo, and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc. iOS is a trademark or registered trademark of Cisco in the U.S. and other countries and is used under license.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc., and any use of such marks by Razer is under license.

Windows and the Windows logo are trademarks of the Microsoft group of companies.

Razer Inc. ("Razer") may have copyright, trademarks, trade secrets, patents, patent applications, or other intellectual property rights (whether registered or unregistered) concerning the product in this guide. Furnishing of this guide does not give you a license to any such copyright, trademark, patent or other intellectual property right. The Razer Leviathan V2 X (the "Product") may differ from pictures whether on packaging or otherwise. Razer assumes no responsibility for such differences or for any errors that may appear. Information contained herein is subject to change without notice.

### **LIMITED PRODUCT WARRANTY**

For the latest and current terms of the Limited Product Warranty, please visit [razer.com/warranty](https://www.razer.com/warranty).

### **LIMITATION OF LIABILITY**

Razer shall in no event be liable for any lost profits, loss of information or data, special, incidental, indirect, punitive or consequential or incidental damages, arising in any way out of distribution of, sale of, resale of, use of, or inability to use the Product. In no event shall Razer's liability exceed the retail purchase price of the Product.

## GENERAL

These terms shall be governed by and construed under the laws of the jurisdiction in which the Product was purchased. If any term herein is held to be invalid or unenforceable, then such term (in so far as it is invalid or unenforceable) shall be given no effect and deemed to be excluded without invalidating any of the remaining terms. Razer reserves the right to amend any term at any time without notice.