


FM2-A55M-E33(MS-7721v2.3) m-ATX Mainboard

Supports AMD® Fusion FM2 series

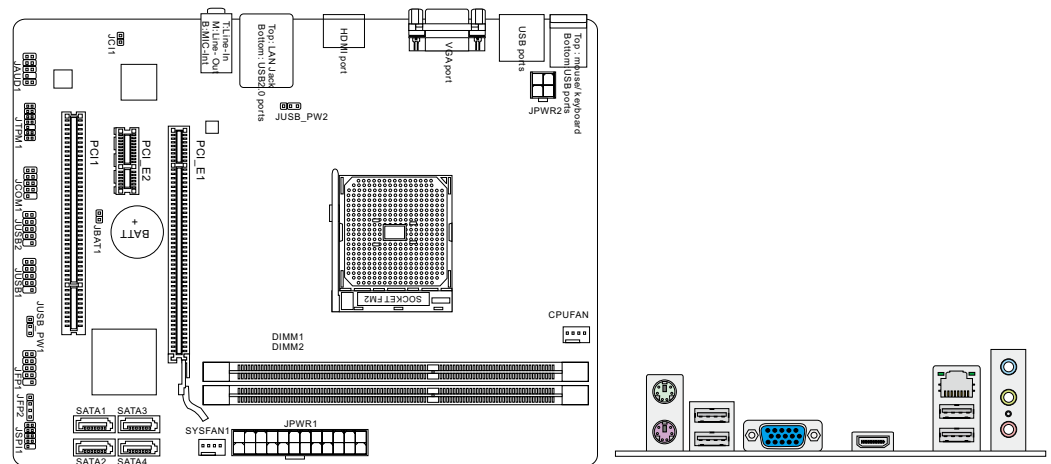

Mainboard Specification

Processor Support	Connectors
Supports AMD® Fusion FM2 series	Back panel
Chipset	1 PS/2 mouse port
AMD® A55 chipset	1 PS/2 keyboard port
Memory Support	1 VGA port
- DDR3 1066/1333/1600/1866 SDRAM (16GB Max) - Supports dual channel mode	1 HDMI port
LAN	4 USB 2.0 ports
Supports LAN 10/100/1000 Fast Ethernet by Realtek® RTL8111E	1 LAN jack 3 flexible audio jacks
Audio	On-Board Connectors
- Chip integrated by Realtek® ALC887 - Flexible 8-channel audio with jack sensing - Compliant with Azalia 1.0 Spec	2 USB 2.0 connectors 1 Front Panel Audio connector 1 Serial connector 1 TPM Module connector 1 Chassis Intrusion connector
SATA	Slots
4 SATA 3Gb/s ports by AMD® A55	1 PCI Express x16 slot 1 PCI Express x1 slot 1 PCI slot
	Form Factor
	Micro-ATX (22.6cm X 17.3cm)
	Feature on Focus
	- All Solid Cap design - M-Flash included - Directx 11 - Dual Graphic
	Mounting
	6 mounting holes

These specification is subject to change without prior notice.