


A78M-E35 (MS-7721v6.0) m-ATX Motherboard

Supports FM2+ Socket for AMD® A- series/ Athlon™ Series Processor

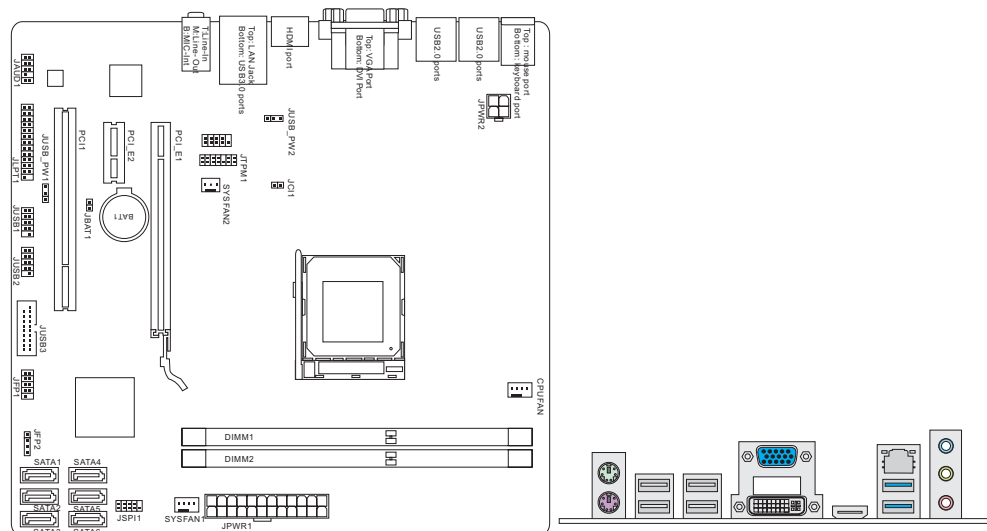

Motherboard Specification

Processor Support - Supports FM2+ Socket for AMD® A- series/ Athlon™ Series Processor Chipset - AMD® A78 chipset Memory Support 2 DIMMs support for DDR3-2133/ 1866/1600/1333 MHz up to 32GB max - Supports dual channel mode LAN - Supports Gb LAN 10/100/1000 Fast Ethernet by Realtek® RTL8111G Audio - Chip integrated by Realtek® ALC887 - Flexible 8-channel audio with jack sensing - Compliant with Azalia 1.0 Spec SATA 6 SATA 6Gb/s ports by AMD® A78 USB 3.0 4 USB 3.0 ports by AMD® A78 (rear x 2, front x 2)	Connectors Back panel 1 PS/2 mouse port 1 PS/2 keyboard port 1 VGA port 1 DVI port 1 HDMI port 4 USB 2.0 ports 2 USB 3.0 ports 1 LAN jack 3 flexible audio jacks On-Board Connectors 2 USB 2.0 connectors 1 USB 3.0 connector 1 Front Panel Audio connector 1 Serial connector 1 TPM Module connector 1 Chassis Intrusion connector 1 Parallel port Slots 1 PCI Express x16 slot 1 PCI Express x1 slot 1 PCI slot, Support 3.3V/ 5V PCI bus Interface Form Factor - Micro-ATX (22.6 cm X 21.6 cm) Feature on Focus - M-Flash included - USB Safeguard - USB 3.0 - SATA 6Gb/s - Directx 11 - Dual Graphic - AMD Memory profile technology Mounting 6 mounting holes
--	---

These specification is subject to change without prior notice.