




# 5.25 Multipanel - 61 in 1 Card Reader / FireWire / USB 2.0 / eSATA / Audio

## Description

This Delock multipanel can be installed into the 5.25 drive bay of your PC. Black, silver and beige front bezel are included for different chassis colours. This card reader can read and write 61 different memory card formats. Furthermore you can connect different devices to the multipanel.

## Images

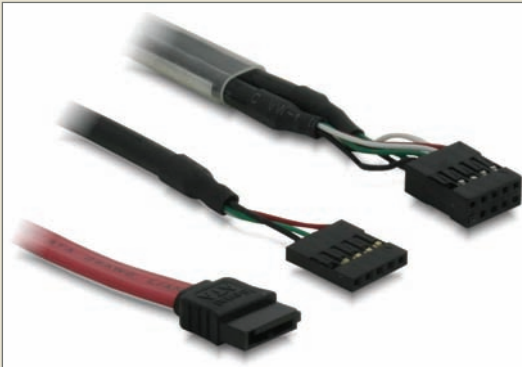

Ref.	91631
EAN	4043619916313
Country of origin	Taiwan
Customs tariff number	84719000

## Specification

- For 5.25 bay mounting
- USB 2.0 Card Reader 61 in 1
- 2 x USB 2.0 ports, 1 x FireWire A port, 1 x eSATA port
- Audio ports: Line-In, Line-Out, Microphone
- Hot Swap, Plug & Play
- Supports following memory cards:

<b>Slot 1</b> Smart Card / XD	Smart Media, Smart Media ROM, xD, xD type M, xD type H
<b>Slot 2</b> Secure Digital / Multi Media Card	SD, SD High Capacity (SDHC), SDXC, SD Ultra II, SD UDMA II, SD Extreme III, SDHC Turbo, SDHC Ultra, SDHC Extreme, SDHC Extreme III, Turbo-SD, Turbo Mini SD*, Mini SD*, Mini SDHC*, MMC-I, MMC-II, MMC 4.0, MMC plus, HS-MMC, MMCmobile*, MMCmobile Dual-Voltage*, RS-MMC*, RS-MMC 4.0*, RS-MMC Dual-Voltage*
<b>Slot 3</b> Micro SD / M2	MicroSD, Micro SDHC, Micro SDHC Turbo, Mirco SDXC, T-Flash, MMCmicro, MS Micro (M2)
<b>Slot 4</b> Compact Flash / Micro Drive	CF I, CF II, CF 4.0, CF ultra II, CF Extreme, CF Extreme III, CF Extreme IV, CF Extreme IV UDMA, UDMA Extreme, UDMA 6 Extreme Pro, ULTIMA II, Micro Drive, Magicstor
<b>Slot 5</b> Memory Stick	MS, High Speed MS (HS-MS), MS-ROM, MS Magic Gate, MS Pro, MS-Pro Magic Gate, MS-Duo, MS-Duo Magic Gate, MS-Pro Duo, MS-Pro Duo HighSpeed, MS-Pro HG-Duo, MS-Pro Duo Magic Gate

\* Adapter required

### System requirements

- Windows 2000/XP/Vista/7, Mac OS 8.6x or above, Linux OS 2.6 or above
- PC with one free 5.25 bay
- One free internal 4 pin and 9 pin USB 2.0 port
- One free internal SATA port
- A free slot to lead out the audio cables
- Three free external audio ports and one ext. FireWire A port