
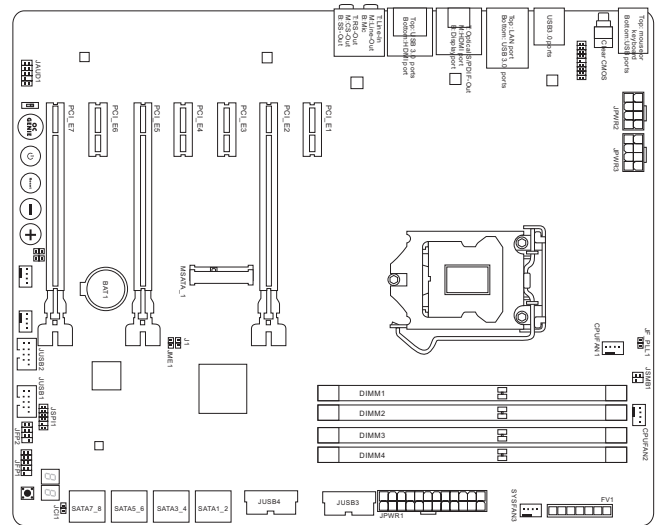


Z87 MPOWER MAX AC

(MS-7815v1.3) ATX Motherboard

Support for Intel® Core™ i7/ Core™ i5/
Core™ i3/ Pentium®/ Celeron® processors in
an LGA 1150 socket

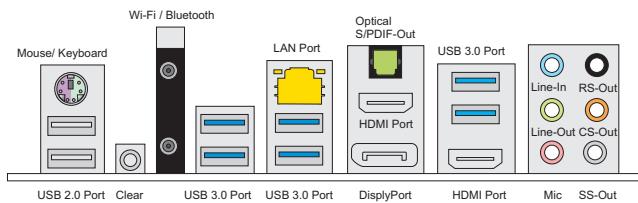

Motherboard Specification

Processor Support Support for Intel® Core™ i7 / Core™ i5 / Core™ i3 / Pentium® / Celeron® processors in an LGA 1150 socket	6 flexible audio ports - On-Board 2 USB 2.0 connectors 2 USB 3.0 connectors 1 Chassis Intrusion connector 1 Front Panel Audio connector 1 V-Check points 1 Power Button 1 Reset Button 1 OC Genie Button 2 Base Clock Buttons
Base Clock 100/125/167 MHz	Slots 3 x PCI Express 3.0 x16 slots 4 x PCIe x1 slots 1 x m-SATA slot
Chipset Intel® Z87 chipset	Form Factor ATX (304.8 x 243.84 mm)
Memory Support 4 DIMMs support 1066, 1333, 1600, 1866(OC), 2133(OC), 2400(OC), 2666(OC), 2800(OC), 3000(OC) or Higher up to 32GB max - Supports Dual-Channel mode	Feature on Focus - AMD CrossFire - Audio Boost - Clear CMOS Button - Click BIOS 4 - Command Center - Direct OC - Easy Button - Gaming Device Port - GO2BIOS - Intel Wireless Display - Killer Ethernet - LN2 Mode - Lucid Virtu MVP 2.0 - Military Class 4 - NVIDIA SLI - OC Certified - OC Genie 4 - Super Charger - Super RAID - Total Fan Control - V-Check Points - Intel® Wi-Fi/ BT 4.0 Module - Intel® WiDi Support
LAN Supports LAN 10/100/1000 Fast Ethernet by Atheros Killer E2205	Mounting 9 mounting holes
Wireless Communication module - Wi-Fi 802.11 ac/b/g/n supports Intel Wireless Display (WiDi) - Bluetooth 4.0, 3.0+HS, 2.1+EDR	
Audio - Chip integrated by Realtek® ALC1150 - Flexible 8-channel audio with jack sensing - Compliant with Azalia 1.0 Spec	
SATA 6 (SATA1~6) 6Gb/s ports from Z87 with RAID support 2 (SATA7~8) 6Gb/s ports from ASMedia ASM1061	
USB 3.0 10 x USB 3.0 ports (6 Rear / 4 Front)	
Connectors - Back panel 1 PS/2 mouse/ keyboard port 2 USB 2.0 ports 6 USB 3.0 ports 1 Clear CMOS 1 Optical S/PDIF OUT connector 2 HDMI ports 1 Display port 1 Wi-Fi module connector 1 LAN port	

These specification is subject to change without prior notice.