

TV Wall Mount and Entertainment Shelf

Instruction Manual

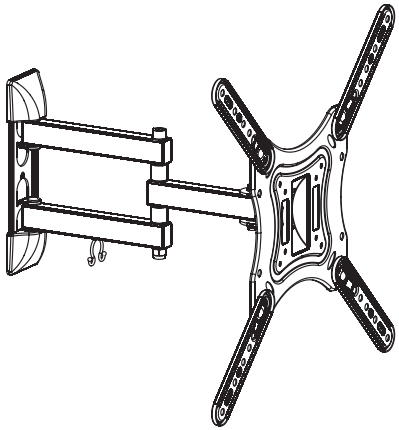

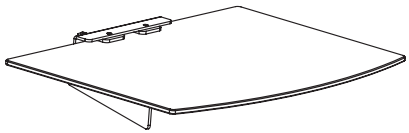

SKU: MOUNT-VWSF1,W

Scan the QR code with your mobile device or follow the link for helpful videos and specifications related to this product.

https://vivo-us.com/products/mount-vwsf1

GET IN TOUCH | Monday-Friday from 7:00am-7:00pm CST

help@vivo-us.com


www.vivo-us.com
Chat live with an agent!

309-278-5303

⚠ WARNING!

If you do not understand these directions, or if you have any doubts about the safety of the installation, please call a qualified technician. Check carefully to make sure there are no missing or defective parts. Improper installation may cause damage or serious injury. Do not use this product for any purpose that is not explicitly specified in this manual. Do not exceed weight capacity. We cannot be liable for damage or injury caused by improper mounting, incorrect assembly or inappropriate use.

PACKAGE CONTENTS



A (x1)
Mount




B (x2)
Plastic Cover



C (x1)
Cable Clip



D (x4)
VESA Adapter



E (x1)
Shelf



F (x1)
Shelf



G (x2)
Shelf Clip



H (x2)
Suction Cup



S-A (x4)
M6x15



S-B (x2)
M5x8mm
Screw



S-C (x4)
M6 Nut



M-A (x4)
M6x14mm
Screw



M-B (x4)
M8x20mm
Screw



M-C (x4)
Spacer



W-A (x3)
ST6.3x55mm Bolt



W-B (x3)
Anchor



W-C (x1)
M6 Washer



W-A2 (x3)
ST5.5x50mm Bolt



W-B2 (x3)
Anchor



W-C2 (x3)
M6 Washer

NOTE: NOT ALL HARDWARE INCLUDED WILL BE USED



DO NOT INSTALL INTO DRYWALL ALONE

DRYWALL ALONE CANNOT SUPPORT WEIGHT OF YOUR TV. Mount must be installed into wood stud or concrete/brick walls ONLY. Failure to follow instructions may result in damage to TV and/or serious personal injury. Please verify intended mounting location before proceeding. If unsure, please contact us at 309-278-5353 or help@vivo-us.com.

TOOLS NEEDED



Drill



Phillips Screwdriver

DO NOT EXCEED WEIGHT CAPACITY.

Failure to do so may result in serious injury.



TV Mount



Shelf

⚠ WARNING: CHOKING HAZARD


SMALL PARTS - NOT FOR CHILDREN UNDER 3 YEARS. ADULT SUPERVISION IS REQUIRED.


TV MOUNT ASSEMBLY STEPS


STEP 1


OPTION A: Wood Stud Wall

Use Mount **(A)** to mark mounting holes on wall where stud is located. Use of studfinder and level is recommended. Using a 3/16" bit, drill approximately 2.2" into marked locations. Screw two ST6.3x55mm Bolts **(W-A)** into top holes, making sure to leave 3mm of threads exposed.

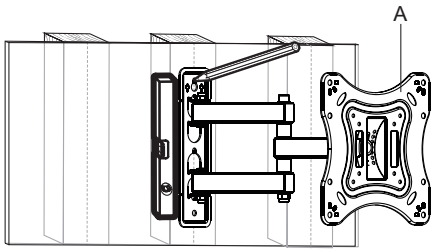

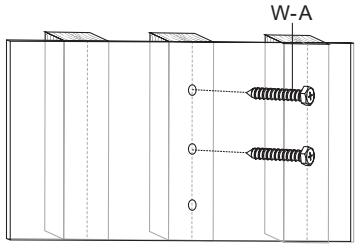

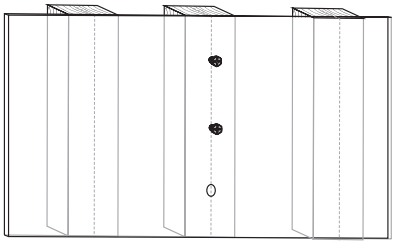







Anchors NOT Intended For Drywall Use


Anchors (W-B) are included for concrete/brick installations ONLY.


OPTION B: Concrete/Brick Wall

Use Mount **(A)** to mark mounting holes on wall. Using a 3/8" bit, drill approximately 2.4" into marked locations. Insert Wall Anchors **(W-B)** and screw two ST6.3x55mm Bolts **(W-A)** into top holes, making sure to leave 3mm of threads exposed.

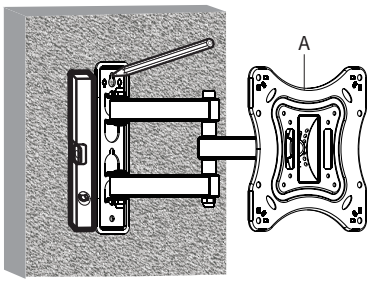









STEP 2

Mount VESA Adapters **(D)** to VESA Plate on Mount **(A)** using M6x15mm Screws **(S-A)** and M6 Nuts **(S-C)** in the appropriate configuration to match your television mounting holes.

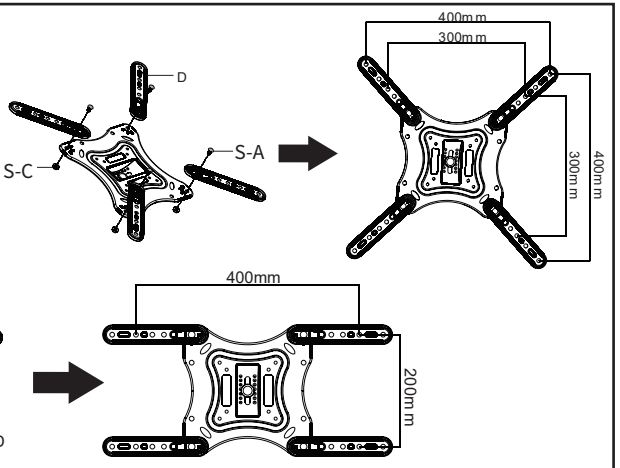


STEP 3

After placing TV on a flat surface, attach VESA plate to back using Screws **(M-A, M-B)**. Make sure top of mount is facing top of TV. If screws are too long, Spacers **(M-C)** may be required as shown in diagram.

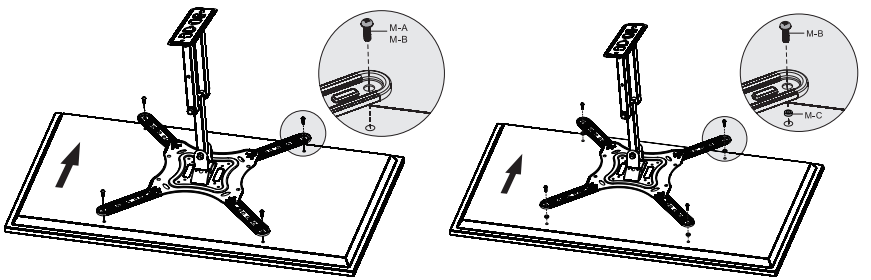


STEP 4

Slide Mount **(A)** over two Screws **(W-A)** already inserted into wall and insert third ST6.3x55mm Screw **(W-A)** and M6 Washer **(W-C)** into bottom hole. Tighten using Phillips screwdriver.

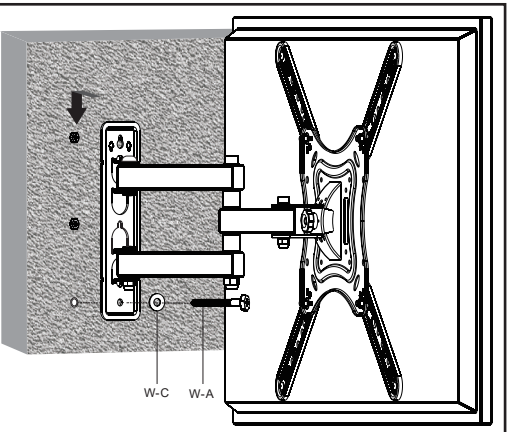


STEP 5

Insert Plastic Covers **(B)** as shown in diagram.

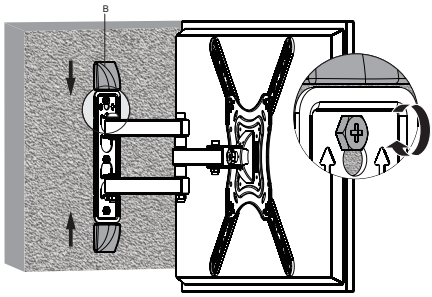


STEP 6

Attach Cable Clip **(C)** to bottom of Mount **(A)**.



STEP 7

Run cables through Cable Clip **(C)** and adjust monitor to desired angle as shown in diagram.

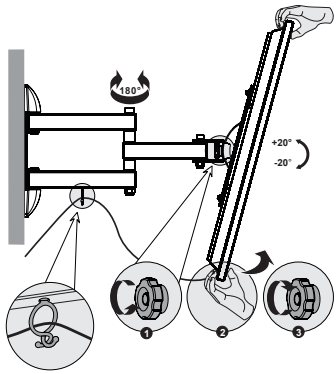



SHELF ASSEMBLY STEPS

STEP 1

OPTION A: Wood Wall


Using the Shelf Bracket **(E)** as a guide, mark the mounting holes on the wall where a stud is located. With a 4mm bit, drill approximately 2" into wall. Mount the Shelf Bracket **(E)** onto wall using ST.5x50mm Bolts **(W-A2)** and M6 Washers **(W-C2)**. Ensure the mounting screws are anchored into the center of the studs. The use of a stud finder is highly recommended.






STEP 1 (Continued)


OPTION B: Concrete/Brick Wall
Using Shelf Bracket **(E)** as a guide, mark mounting holes on wall. With a 5/16" bit, drill approximately 2.2" into wall. Insert Concrete Anchors **(W-B2)**, ST5.5x50mm Bolts **(W-A2)** and M6 Washers **(W-C2)** to mount the Shelf Bracket **(E)** onto wall as shown in diagram.

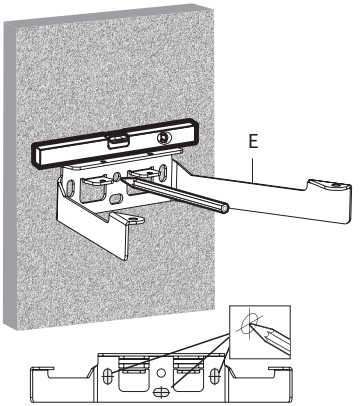

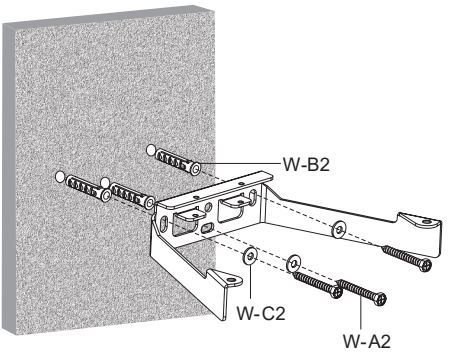


STEP 2

Insert Shelf Clips **(G)** into Shelf Bracket **(E).**

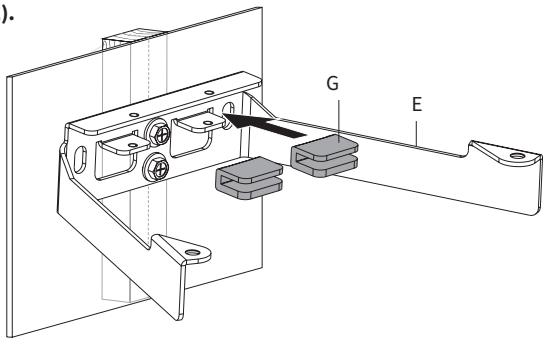


STEP 3

Attach Suction Cups **(H)** to Shelf Bracket **(E)** as shown in diagram.

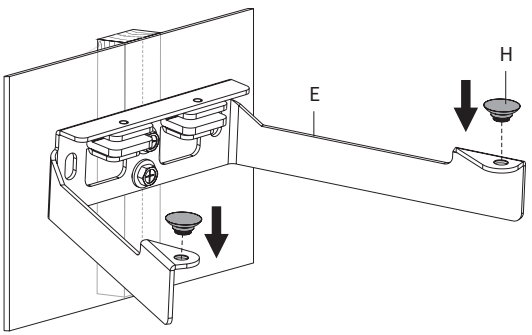


STEP 4

Slide Shelf **(F)** into Clips **(G)**.

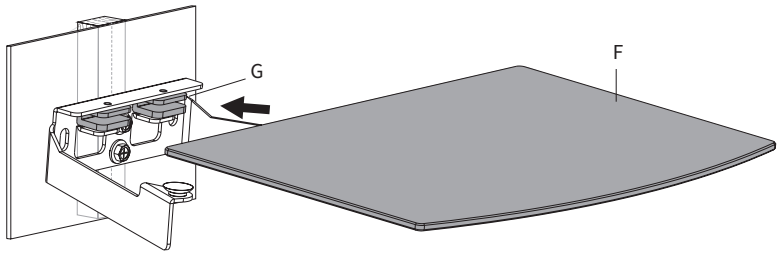


STEP 5

Use M5x8mm Screws **(S-B)** into Shelf Bracket **(E)** to secure the Shelf **(F)** into place using a Phillips screwdriver as shown in the diagram.

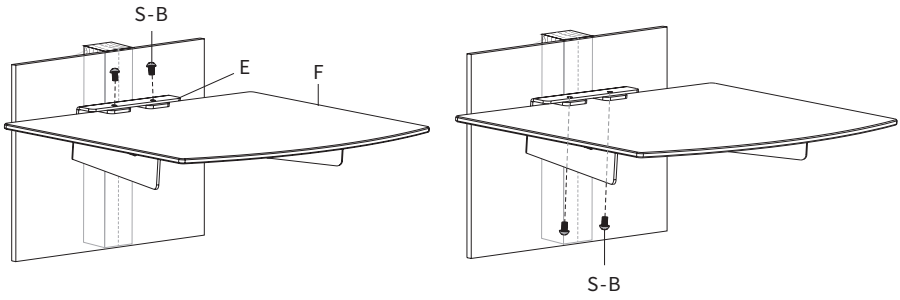

STEP 6

Place desired objects on shelf.

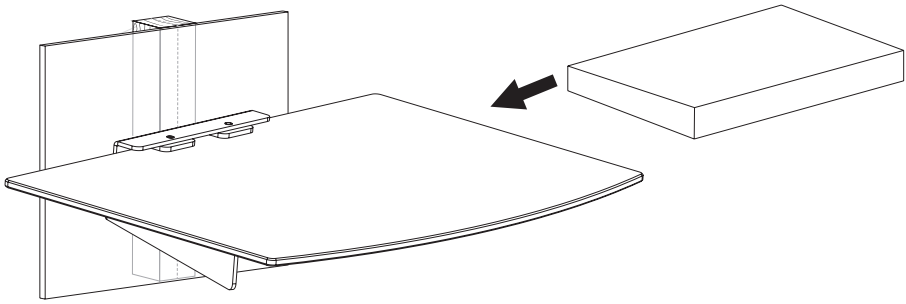

Open **Monday - Friday 7:00am - 7:00pm** CST,
our dedicated support team can offer immediate assistance with rapid response times. If any parts are received damaged or defective, please contact us. We are happy to replace parts to ensure you have a fully functioning product.

309-278-5303

AVG. RESOLUTION TIME *(within office hrs)*: **5M 4S**

---

www.vivo-us.com
Chat live with an agent!

AVG. RESOLUTION TIME *(within office hrs)*: **< 15 M**

---

help@vivo-us.com

AVG. RESPONSE TIME *(within office hrs)*: **1HR 8M**
- 23% within < 15m
- 38% within < 30m
- 61% within < 1hr
- 83% within < 2hr
- 92% within < 3hr