


PATH TO THE FUTURE



Picture and logos

SELLING POINTS

- Aktuelles QD-OLED-Panel der 5. Generation – Neues RGB-Streifen-Subpixel-Layout für schärfere Bilder
- DarkArmor-Film – Sorgt für 40 % tiefere Schwarztöne und eine 2,5-mal kratzfestere Bildschirmoberfläche.
- Uniform Luminance – Anpassung der HDR-Kurve, mit der ein gleichmäßig ausgeleuchtetes HDR-Erlebnis möglich ist.
- MSI OLED Care 3.0 – Der AI Care Sensor reduzierte das Risiko von OLED-Bildschatten/Einbrennen.
- Atemberaubendes HDR – VESA DisplayHDR True Black 500.
- Spitzenhelligkeit von 1300 Nits – sorgt für ein herausragendes HDR mit einer Spitzenhelligkeit von 1300 Nits.
- Delta E_{≤2} – Farbtreue auf Marktstandards.
- Kristallklare Bewegung – VESA ClearMR 18000 zertifiziert.
- 3 Jahre Anti-Einbrenn-Garantie – Inklusive Abdeckung für OLED-Einbrennen.

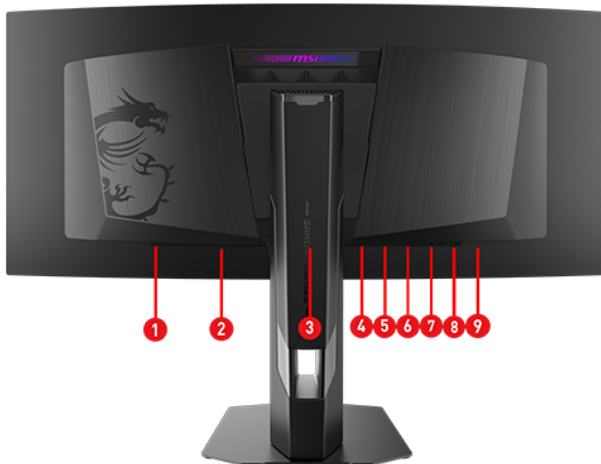

1. Kensington Lock
2. Stromanschluss
3. 5-Wege Joystick Navigation
4. Kopfhörer-Ausgang
5. 2x HDMI™ 2.1 (UWQHD@360Hz)
6. DisplayPort 2.1a (UHBR13.5)
7. Typ-C (DP alt.) mit 98W PD
8. USB 2.0 Typ-B
9. 2x USB 2.0 Typ-A



MONITOR

MPG 341CQRDE QD-OLED X36

MPG 341CQR QD-OLED X36

SPECIFICATION

Model	SKU Number	9S6-3DE29A-001
	Entity MKT Name	MPG 341CQR QD-OLED X36
	Part No	9S6-3DE29A-001
	Color	ID1/Black-Black
Display	Screen Size	34" (86.36 cm)
	Active Display Area (mm)	800.06(H) x 337.06(V)
	Curvature	Curve 1800R
	Panel Type	QD-OLED
	Resolution	3440x1440 (UWQHD)
	Pixel pitch (mm)	0.2315(H)x0.2315(V)
	Aspect Ratio	21:9
	Dynamic Refresh Rate technology	NVIDIA G-SYNC Compatible / AMD FreeSync™ Premium Pro
	Dynamic Refresh Rate Activated Range	48~360Hz
	HDR (High dynamic range)	VESA DisplayHDR True Black 500
	SDR Brightness (nits)	300
	HDR Brightness (Peak nits)	1300
	Contrast Ratio	1500000:1
	Signal Frequency	30~596.2 KHz(H) / 48~360 Hz(V)
	Refresh Rate	360Hz
	Response Time (GTG)	0.03ms
	View Angles	178°(H)/178°(V)
	NTSC (CIE1976 area percentage/overlap)	121.3%/94.2%
	NTSC (CIE1931 area percentage/overlap)	105.4%/92.3%
	sRGB (CIE1976 area percentage/overlap)	139.1%/100%
	sRGB (CIE1931 area percentage/overlap)	148.8%/100%
	Adobe RGB (CIE1976 area percentage/overlap)	119.2%/97.8%
	Adobe RGB (CIE1931 area percentage/overlap)	109.7%/99.1%
	DCI-P3 (CIE1976 area percentage/overlap)	110.8%/99.3%
	DCI-P3 (CIE1931 area percentage/overlap)	109.7%/99.1%
	Rec.709 (CIE1976 area percentage/overlap)	139.1%/100%
	Rec.709 (CIE1931 area percentage/overlap)	148.8%/100%
	Rec.2020 (CIE1976 area percentage/overlap)	80.7%/80.7%
	Rec.2020 (CIE1931 area percentage/overlap)	78.7%/78.7%
	Surface Treatment	Anti-Reflection
	Display Colors	1.07B
	Color bit	10 bits
Schnittstellen	USB Type C (DisplayPort Alternate)	1
	Headphone-out	1
	USB 3.2 Gen 1 Type A	2
	USB 3.2 Gen 1 Type B	1
	Lock type	Kensington Lock
	HDMI	2
	HDMI version	2.1
	HDMI HDCP version	2.3
	DisplayPort	1
	DisplayPort version	2.1a (UHBR13.5)
	DisplayPort HDCP version	2.3
Garantie	Warranty	36M
Power	Power Type	Internal Power Board
	Power Input	100~240V, 50/60Hz
	On-mode Power Consumption (KWh/1000h)	32
	Annual Energy Consumption (KWh)	32
	Standby-mode Power Consumption (W)	0.5
	Off-mode Power Consumption (W)	0.3
	Energy Efficiency Rating	F
	Power Cord Type	C13



M O N I T O R

MPG 341CQRDE QD-OLED X36

M P G 3 4 1 C Q R Q D - O L E D X 3 6

Zubehör	DisplayPort Cable	1
	HDMI Cable	1
	DVI Cable	0
	USB Type A to Type B Cable	1
	USB Type C to Type A Cable	0
	USB Type C to Type C Cable	0
	Thunderbolt Cable	0
	VGA Cable	0
	3.5mm audio Cable	0
	3.5mm combo audio Cable	0
	3.5mm Mic Cable	0
	Power Cord	1
	AC Adaptor	0
	Quick Guide	1
	Warranty Card	0
	Mouse Bungee Unit	0
Design	Adjustment (Tilt)	-5° ~ 15°
	Adjustment (Swivel)	-30° ~ 30°
	Adjustment (Height)	0 ~ 110 mm
	Adjustment (Pivot)	-10° ~ 10°
	VESA Mounting	100x100mm
Abmessungen & Gewicht (Product)	Product Dimension with Stand (WxDxH) (mm)	812.83 x 228.30 x 543.08
	Product Dimension without Stand (WxDxH) (mm)	812.83 x 118.54 x 372.09
	Stand Dimension (WxDxH) (mm)	235.48 x 228.30 x 408.30
	Weight (Net kg)	7.77
	Weight Without Stand (kg)	5.2
Abmessungen & Gewicht (Verpackung)	Inside Carton Dimension (WxDxH) (cm)	99.5 x 20 x 50.5
	Outer Carton Dimension (WxDxH) (cm)	101.8 x 21.4 x 52.5
	Weight (Gross kg)	13.49
Barcode Info	EAN	4711377404099