

# Dell 14S

DS14260

Setup and Specifications

## Notes, cautions, and warnings

 **NOTE:** A NOTE indicates important information that helps you make better use of your product.

 **CAUTION:** A CAUTION indicates either potential damage to hardware or loss of data and tells you how to avoid the problem.

 **WARNING:** A WARNING indicates a potential for property damage, personal injury, or death.

# Contents

|                                                                            |           |
|----------------------------------------------------------------------------|-----------|
| <b>Chapter 1: Views of Dell 14S DS14260.....</b>                           | <b>4</b>  |
| Right view.....                                                            | 4         |
| Left view.....                                                             | 4         |
| Top view.....                                                              | 5         |
| Front view.....                                                            | 6         |
| Bottom view.....                                                           | 7         |
| Locate the Service Tag or Express Service Code label of your computer..... | 7         |
| Battery-status light.....                                                  | 8         |
| <b>Chapter 2: Set up your Dell 14S DS14260.....</b>                        | <b>9</b>  |
| <b>Chapter 3: Specifications of Dell 14S DS14260.....</b>                  | <b>11</b> |
| Dimensions and weight.....                                                 | 11        |
| Processor.....                                                             | 11        |
| Chipset.....                                                               | 13        |
| Operating system.....                                                      | 13        |
| Memory.....                                                                | 13        |
| External ports and slots.....                                              | 13        |
| Internal slots.....                                                        | 14        |
| Wireless module.....                                                       | 14        |
| Audio.....                                                                 | 15        |
| Storage.....                                                               | 15        |
| Keyboard.....                                                              | 16        |
| Keyboard function keys.....                                                | 16        |
| Camera.....                                                                | 18        |
| Touchpad.....                                                              | 18        |
| Power adapter.....                                                         | 19        |
| Power adapter requirements of Dell 14S DS14260.....                        | 19        |
| Battery.....                                                               | 20        |
| Power requirements (for computers shipped with 3-cell, 70 Wh battery)..... | 21        |
| Display.....                                                               | 22        |
| Sensors .....                                                              | 23        |
| GPU—Integrated.....                                                        | 23        |
| External display support.....                                              | 24        |
| Hardware security.....                                                     | 24        |
| Operating and storage environment.....                                     | 24        |
| Dell low blue light display.....                                           | 25        |
| ComfortView.....                                                           | 25        |
| Dell Optimizer.....                                                        | 25        |
| Dell support policy.....                                                   | 25        |
| <b>Chapter 4: Getting help and contacting Dell Technologies.....</b>       | <b>26</b> |
| <b>Chapter 5: Revision history.....</b>                                    | <b>27</b> |

# Views of Dell 14S DS14260

## Right view



Figure 1. Right view

### 1. Global headset jack

Supports connection of headphones or combo headsets with integrated microphone for audio input and output.

### 2. USB 3.2 Gen 1 (5 Gbps) port

Supports data transfer speed up to 5 Gbps for connecting external storage and peripheral devices.

## Left view

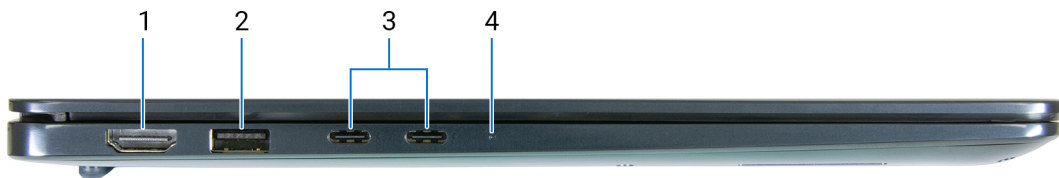


Figure 2. Left view

### 1. HDMI 2.1 port

Outputs high-definition video and audio to external displays, TVs, or HDMI-in devices. Supports resolutions up to 4096 × 2160 at 60 Hz with HDCP 2.3 for secure content playback, enabling users to extend or mirror their display for entertainment, presentations, or multi-screen setups.

### 2. USB 3.2 Gen 1 (5 Gbps) port

Supports data transfer speed up to 5 Gbps for connecting external storage and peripheral devices.

### 3. Thunderbolt 4 port with Power Delivery and DisplayPort (2)

Transfers data at high speed, charges your device, and connects to external displays—all through one port:

- **Thunderbolt 4:** Offers up to 40 Gbps data transfer speed, enabling ultra-fast file transfers, external SSDs, and high-performance peripherals. Offers backward compatibility with USB 3.2, USB 2.0, and Thunderbolt 3.
- **DisplayPort:** Allows video output to external monitors (supports up to dual 4K@60Hz or single 8K@60Hz displays), making it ideal for docking stations or multi-monitor setups. Compatible with USB-C to HDMI/DP adapters and docking stations.
- **USB4 Compatibility:** Ensures broad support for USB devices with efficient bandwidth sharing and backward compatibility with USB 3.2, USB 2.0, and Thunderbolt 3.
- **Power Delivery (PD):** Supports charging of laptops, tablets, and other devices with up to 100 W power through the same port, reducing the need for separate power adapters.

#### 4. Battery indicator LED

Indicates the current battery charge level and charging status through LED signals, helping users monitor power availability and charging progress.

If the computer is connected to an electrical outlet, the battery indicator LED operates as follows:

- Solid white: The battery is charging. When the charge is complete the LED turns off.

If the computer is running on the battery, the battery indicator LED operates as follows:

- Off: The battery is fully charged, at an adequate charge level, or the computer is turned off.
- Solid amber: The battery charge level is low, with approximately 30 minutes or less of remaining battery life.

## Top view



**Figure 3. Top view**

#### 1. Power button

Provides standard power control (on/off).

**NOTE:** The power-button behavior can be customized in the operating system.

#### 2. Touchpad

Used to move the mouse pointer. You can tap, swipe, or drag your finger to click, scroll, or move items on the screen—like using a mouse.

## Front view



Figure 4. Front view

**CAUTION:** The maximum operating angle for the display-panel hinge is 180 degrees.

**1. Left microphone**

Provide digital sound input for audio recording and voice calls.

**2. Infrared camera**

Enables secure, contactless user authentication by supporting facial recognition through Windows Hello.

**3. Infrared emitter**

Emits infrared light to support the infrared camera in detecting facial features and tracking motion for secure and responsive functionality.

**4. RGB camera**

Allow users to conduct video calls, capture still images, and record video content for communication and documentation purposes.

**5. Camera-status light**

Illuminates automatically to indicate active camera usage, alerting users when the camera is recording or streaming.

**6. Right microphone**

Provide digital sound input for audio recording and voice calls.

**7. Display**

Provides visual output.

## Bottom view



Figure 5. Bottom view

### 1. Speakers

Provide audio output.

### 2. Service Tag label

The Service Tag is a unique alphanumeric identifier that enables Dell service technicians to identify the hardware components in your computer and access warranty information.

### 3. MyDell QR code

MyDell is your hub for content personalized to your Dell 14S DS14260, including videos, articles, manuals, and easy access to support.

## Locate the Service Tag or Express Service Code label of your computer

The Service Tag is a unique alphanumeric identifier that allows Dell service technicians to identify the hardware components in your computer and access warranty information. The Express Service Code is a numeric version of the Service Tag.

For more information about how to find the Service Tag of your computer, search [Dell Support Site](#).



**Figure 6. Service Tag/Express Service Code location**

## Battery-status light

The following table lists the battery-status light of your Dell 14S DS14260.

**Table 1. Battery-status light behavior**

| Power source | LED behavior | System power state | Battery charge level |
|--------------|--------------|--------------------|----------------------|
| AC adapter   | Off          | S0 or S5           | 100%                 |
| AC adapter   | Solid white  | S0 or S5           | < 100%               |
| Battery      | Off          | S0 or S5           | 11-100%              |
| Battery      | Solid amber  | S0 or S5           | < 10%                |

- S0 (ON): The computer is turned on.
- S3 (Sleep): Screen is off, and the computer is in sleep mode.
- S4 (Hibernate): The computer consumes the least power in the Hibernate state than in the ON or OFF state. The computer is almost in the OFF state. The context data is written to a storage device, allowing you to resume from where you left after the computer is turned on.
- S5 (OFF): The computer is in a shutdown state.

# Set up your Dell 14S DS14260

## About this task

**NOTE:** The images in this document may differ from your computer depending on the configuration you ordered.

## Steps

1. Connect the power adapter and press the power button.

**NOTE:** To conserve battery power, the battery might enter power-saving mode. Ensure that the power adapter is connected before turning on the computer.



**Figure 7. Connect the power adapter and press the power button**

2. Finish the operating system setup.

### For Windows:

Follow the on-screen instructions to complete the setup. When setting up, it is recommended that you:


- Connect to a network for Windows updates.

**NOTE:** If connecting to a secured wireless network, enter the password for the wireless network access when prompted.

- If connected to the Internet, sign-in with an existing Microsoft account or create an account. If not connected to the Internet, create an offline account.
- On the **Support and Protection** screen, enter your contact details.

3. Locate and use Dell apps from the Windows Start menu. This step is optional but recommended.

**Table 2. Locate Dell apps**

| Resources                                                                         | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | <p>Dell Optimizer is an application that is designed to enhance computer performance and productivity by optimizing settings for power, battery, display, collaboration touchpad, and presence detection. It also provides access to applications purchased with your new computer.</p> <p>For more information, see Dell Optimizer User's Guide at <a href="#">Dell Support Site</a>.</p>                                                                                                                                                                                                                                    |
|  | <p><b>Dell Product Registration</b></p> <p>Register your computer with Dell.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|  | <p><b>Dell Help &amp; Support</b></p> <p>Access help and support for your computer.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|  | <p><b>SupportAssist</b></p> <p>SupportAssist is a proactive and predictive technology that offers automated technical support for Dell computers. It proactively monitors both hardware and software, addressing performance issues, preventing security threats, and automating engagement with Dell Technical Support.</p> <p>For more information, see the SupportAssist documentation at <a href="#">Dell Support Site</a>.</p> <p> <b>NOTE:</b> In SupportAssist, click the warranty expiry date to renew or upgrade your warranty.</p> |

# Specifications of Dell 14S DS14260

## Dimensions and weight

The following table lists the height, width, depth, and weight of your Dell 14S DS14260.

**Table 3. Dimensions and weight**

| Description                                                                                                                                                                         | Values                                                                                                                                                                                                    |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Front height                                                                                                                                                                        | 6.89 mm (0.27 in.)                                                                                                                                                                                        |
| Rear height                                                                                                                                                                         | 11.40 mm (0.45 in.)                                                                                                                                                                                       |
| Width                                                                                                                                                                               | 313.70 mm (12.35 in.)                                                                                                                                                                                     |
| Depth                                                                                                                                                                               | 224 mm (8.82 in.)                                                                                                                                                                                         |
| Weight<br> <b>NOTE:</b> The weight of your computer depends on the configuration that you ordered. | <ul style="list-style-type: none"><li>• For computers shipped with non-touch displays:<br/>1.49 kg (3.28 lb)</li><li>• For computers shipped with touch-enabled displays:<br/>1.54 kg (3.40 lb)</li></ul> |

## Processor

The following tables list the details of the processors that are supported in your Dell 14S DS14260.

**Table 4. Processor**

| Description                                                                                                                                                                                             | Option One                      | Option two                       | Option three                    | Option four                      | Option five                       | Option six                       |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|----------------------------------|---------------------------------|----------------------------------|-----------------------------------|----------------------------------|
| Processor type                                                                                                                                                                                          | Series 3 Intel Core Ultra 5 322 | Series 3 Intel Core Ultra 5 336H | Series 3 Intel Core Ultra 7 355 | Series 3 Intel Core Ultra 7 356H | Series 3 Intel Core Ultra X7 358H | Series 3 Intel Core Ultra 9 386H |
| Processor wattage                                                                                                                                                                                       | 25 W                            | 25 W                             | 25 W                            | 25 W                             | 25 W                              | 25 W                             |
| Processor total core count                                                                                                                                                                              | 6                               | 12                               | 8                               | 16                               | 16                                | 16                               |
| Performance-cores                                                                                                                                                                                       | 2                               | 4                                | 4                               | 4                                | 4                                 | 4                                |
| Efficient-cores                                                                                                                                                                                         | Not supported                   | 4                                | Not supported                   | 8                                | 8                                 | 8                                |
| Low Power Efficient-cores                                                                                                                                                                               | 4                               | 4                                | 4                               | 4                                | 4                                 | 4                                |
| Processor total thread count<br> <b>NOTE:</b> Intel Hyper-Threading Technology is available only on Performance-cores. | 6                               | 12                               | 8                               | 16                               | 16                                | 16                               |
| Processor speed                                                                                                                                                                                         | Up to 4.4 GHz                   | Up to 4.6 GHz                    | Up to 4.7 GHz                   | Up to 4.7 GHz                    | Up to 4.8 GHz                     | Up to 4.9 GHz                    |
| Performance-cores frequency                                                                                                                                                                             |                                 |                                  |                                 |                                  |                                   |                                  |
| Processor base frequency                                                                                                                                                                                | 2.5 GHz                         | 1.9 GHz                          | 2.3 GHz                         | 1.9 GHz                          | 1.9 GHz                           | 2.1 GHz                          |
| Maximum turbo frequency                                                                                                                                                                                 | 4.4 GHz                         | 4.6 GHz                          | 4.7 GHz                         | 4.7 GHz                          | 4.8 GHz                           | 4.9 GHz                          |
| Efficient-cores frequency                                                                                                                                                                               |                                 |                                  |                                 |                                  |                                   |                                  |
| Processor base frequency                                                                                                                                                                                | Not supported                   | 1.5 GHz                          | Not supported                   | 1.5 GHz                          | 1.5 GHz                           | 1.6 GHz                          |
| Maximum turbo frequency                                                                                                                                                                                 | Not supported                   | 3.4 GHz                          | Not supported                   | 3.5 GHz                          | 3.5 GHz                           | 3.7 GHz                          |
| Low Power Efficient-cores frequency                                                                                                                                                                     |                                 |                                  |                                 |                                  |                                   |                                  |
| Processor base frequency                                                                                                                                                                                | 1.9 GHz                         | 1.5 GHz                          | 1.7 GHz                         | 1.5 GHz                          | 1.5 GHz                           | 1.6 GHz                          |
| Maximum turbo frequency                                                                                                                                                                                 | 3.3 GHz                         | 3.2 GHz                          | 3.5 GHz                         | 3.3 GHz                          | 3.3 GHz                           | 3.5 GHz                          |
| Processor cache                                                                                                                                                                                         | 12 MB                           | 18 MB                            | 12 MB                           | 18 MB                            | 18 MB                             | 18 MB                            |
| Integrated graphics                                                                                                                                                                                     | Intel Graphics                  | Intel Graphics                   | Intel Graphics                  | Intel Graphics                   | Intel Arc B390                    | Intel Graphics                   |
| Neural Processing Units (NPU) Performance                                                                                                                                                               | Up to 46 TOPS                   | Up to 47 TOPS                    | Up to 49 TOPS                   | Up to 50 TOPS                    | Up to 50 TOPS                     | Up to 50 TOPS                    |

# Chipset

The following table lists the details of the chipset that is supported by your Dell 14S DS14260.

**Table 5. Chipset**

| Description    | Values                       |
|----------------|------------------------------|
| Chipset        | Integrated in the processor  |
| DRAM bus width | 64-bit                       |
| Flash EPROM    | 8 MB (SBIOS) + 32 MB (VBIOS) |
| PCIe bus       | Up to Gen4                   |

# Operating system

Your Dell 14S DS14260 supports the following operating systems:

- Windows 11 Home
- Windows 11 Pro

# Memory

The following table lists the memory specifications of your Dell 14S DS14260.

**Table 6. Memory specifications**

| Description                     | Values                                                                                                                                                                                 |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Memory slots                    | Onboard memory<br> <b>NOTE:</b> The memory is integrated on the system board and is not upgradable. |
| Memory type                     | Dual-channel LPDDR5x                                                                                                                                                                   |
| Memory speed                    | 7467 MT/s                                                                                                                                                                              |
| Maximum memory configuration    | 32 GB                                                                                                                                                                                  |
| Minimum memory configuration    | 16 GB                                                                                                                                                                                  |
| Memory configurations supported | <ul style="list-style-type: none"><li>• 16 GB, LPDDR5x, 7467 MT/s, dual-channel (onboard)</li><li>• 32 GB, LPDDR5x, 7467 MT/s, dual-channel (onboard)</li></ul>                        |

# External ports and slots

The following table lists the external ports and slots on your Dell 14S DS14260.

**Table 7. External ports and slots**

| Description | Values                                                                                                                                                                 |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| USB ports   | <ul style="list-style-type: none"><li>• Two USB 3.2 Gen 1 (5 Gbps) ports</li><li>• Two Thunderbolt 4 (40 Gbps) ports with Power Delivery and DisplayPort 2.1</li></ul> |

**Table 7. External ports and slots (continued)**

| Description         | Values                                                                                                                                                                                                                                                   |
|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                     |  <b>NOTE:</b> You can connect a Dell Docking Station to these ports. For more information, search in the Knowledge Base Resource at <a href="#">Dell Support Site</a> . |
| Audio port          | One global headset port                                                                                                                                                                                                                                  |
| Video port(s)       | <ul style="list-style-type: none"> <li>One HDMI 2.1 port</li> <li>Two USB Type-C Thunderbolt 4 (40 Gbps) with Power Delivery and DisplayPort 2.1 ports</li> </ul>                                                                                        |
| Media-card reader   | Not supported                                                                                                                                                                                                                                            |
| Power-adaptor port  | USB Type-C                                                                                                                                                                                                                                               |
| Security-cable slot | Not supported                                                                                                                                                                                                                                            |

## Internal slots

The following table lists the internal slots of your Dell 14S DS14260.

**Table 8. Internal slots**

| Description | Values                                                                                                                                                                                                                                                                                                                                                                                |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| M.2         | <ul style="list-style-type: none"> <li>One M.2 Key-M (2230) slot for a solid-state drive</li> <li>One M.2 2230 Key-E slot for Wi-Fi and Bluetooth combo card</li> </ul>  <b>NOTE:</b> To learn more about the features of different types of M.2 cards, search <a href="#">Dell Support Site</a> . |

## Wireless module

The following table lists the Wireless Local Area Network (WLAN) modules that are supported on your Dell 14S DS14260.

**Table 9. Wireless module specifications**

| Description               | Option one                                                                                                                                                                                                                                                                                           | Option two                                                                                                                                                                                                                                                                                             |
|---------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Model number              | Intel Wi-Fi 7 BE213                                                                                                                                                                                                                                                                                  | Intel Wi-Fi 7 BE211                                                                                                                                                                                                                                                                                    |
| Transfer rate             | Up to 2.88 Gbps                                                                                                                                                                                                                                                                                      | Up to 5 Gbps                                                                                                                                                                                                                                                                                           |
| Frequency bands supported | <ul style="list-style-type: none"> <li>2.4 GHz</li> <li>5 GHz</li> <li>6 GHz</li> </ul>  <b>NOTE:</b> The 6 GHz frequency is only supported on computers that are installed with the Windows 11 operating system. | <ul style="list-style-type: none"> <li>2.4 GHz</li> <li>5 GHz</li> <li>6 GHz</li> </ul>  <b>NOTE:</b> The 6 GHz frequency is only supported on computers that are installed with the Windows 11 operating system. |
| Wireless standards        | <ul style="list-style-type: none"> <li>WiFi 802.11a/b/g</li> <li>Wi-Fi 4 (Wi-Fi 802.11n)</li> </ul>                                                                                                                                                                                                  | <ul style="list-style-type: none"> <li>WiFi 802.11a/b/g</li> <li>Wi-Fi 4 (Wi-Fi 802.11n)</li> </ul>                                                                                                                                                                                                    |

**Table 9. Wireless module specifications (continued)**

| Description                                                                                                                      | Option one                                                                                                                                                                                                                                                                | Option two                                                                                                                                                                                                                                                                |
|----------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                                                                                  | <ul style="list-style-type: none"> <li>Wi-Fi 5 (WiFi 802.11ac)</li> <li>Wi-Fi 6E (WiFi 802.11ax)</li> <li>Wi-Fi 7 (WiFi 802.11be)</li> </ul> <p><b>NOTE:</b> Wi-Fi 7 standard is only supported on computers that are installed with the Windows 11 operating system.</p> | <ul style="list-style-type: none"> <li>Wi-Fi 5 (WiFi 802.11ac)</li> <li>Wi-Fi 6E (WiFi 802.11ax)</li> <li>Wi-Fi 7 (WiFi 802.11be)</li> </ul> <p><b>NOTE:</b> Wi-Fi 7 standard is only supported on computers that are installed with the Windows 11 operating system.</p> |
| Encryption                                                                                                                       | <ul style="list-style-type: none"> <li>64-bit and 128-bit WEP</li> <li>AES-CCMP</li> <li>TKIP</li> </ul>                                                                                                                                                                  | <ul style="list-style-type: none"> <li>64-bit and 128-bit WEP</li> <li>AES-CCMP</li> <li>TKIP</li> </ul>                                                                                                                                                                  |
| Bluetooth wireless card<br><b>NOTE:</b> The functionality of the Bluetooth wireless card may vary based on the operating system. | Bluetooth 6.0 wireless card                                                                                                                                                                                                                                               | Bluetooth 6.0 wireless card                                                                                                                                                                                                                                               |

## Audio

The following table lists the audio specifications of your Dell 14S DS14260.

**Table 10. Audio specifications**

| Description                | Values                         |
|----------------------------|--------------------------------|
| Audio controller           | Cirrus Logic SmartAmps         |
| Stereo conversion          | Supported                      |
| Internal audio interface   | SoundWire interface            |
| External audio interface   | One global headset port        |
| Number of speakers         | Two                            |
| Internal-speaker amplifier | Supported                      |
| External volume controls   | Keyboard shortcut controls     |
| Speaker output:            |                                |
| Average                    | 2 W + 2 W = 4 W                |
| Peak                       | 10 W + 10 W = 20 W             |
| Microphone                 | Dual digital-array microphones |

## Storage

This section lists the storage options on your Dell 14S DS14260.

Your Dell 14S DS14260 supports one M.2 solid-state drive slot. The primary drive is the M.2 2230 solid-state drive:

- 512 GB SSD TLC M.2 2230 PCIe Gen4
- 1 TB SSD TLC M.2 2230 PCIe Gen4

- 2 TB SSD TLC M.2 2230 PCIe Gen4

Table 11. Storage specifications

| Storage type               | Interface type    | Capacity   |
|----------------------------|-------------------|------------|
| M.2 2230 solid-state drive | PCIe NVMe Gen4 x4 | Up to 2 TB |

## Keyboard

The following table lists the keyboard specifications of your Dell 14S DS14260.

Table 12. Keyboard specifications

| Description        | Values                                                                                                                                                                                                                                                                                                                                                                                                                                |
|--------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Keyboard type      | Zero-lattice, spill-resistant keyboard with battery-saving mini-LED backlit technology and standard AI hotkey                                                                                                                                                                                                                                                                                                                         |
| Keyboard layout    | QWERTY                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Number of keys     | <ul style="list-style-type: none"> <li>• Arabic, Canada (Bilingual) (MUI), Chinese (Traditional), English International, English US, Greek, Hebrew, Hungarian, Korean, Thai: 79 keys</li> <li>• Belgian, Czech/Slovak (MUI), English UK, French (European), German, Italian, Nordic (MUI), Portuguese, Spanish (Castilian), Swiss/European: 80 keys</li> <li>• Japanese: 83 keys</li> </ul>                                           |
| Key pitch          | X = 18.05 mm key pitch<br>Y = 18.05 mm key pitch                                                                                                                                                                                                                                                                                                                                                                                      |
| Keyboard shortcuts | <p>Some keys on your keyboard have two symbols on them. These keys can be used to type alternate characters or to perform secondary functions. To type the alternate character, press Shift and the desired key. To perform secondary functions, press Fn and the desired key.</p> <p><b>NOTE:</b> You can define the primary behavior of the function keys (F1–F12) changing <b>Function Key Behavior</b> in BIOS setup program.</p> |

## Keyboard function keys

**NOTE:** Keyboard characters may differ depending on the keyboard language configuration. Keys that are used for shortcuts remain the same across all language configurations.

Some keys on your keyboard have two symbols on them. These keys can be used to type alternate characters or to perform secondary functions. The symbol that is shown on the lower part of the key refers to the character that is typed out when the key is pressed. If you press shift and the key, the symbol that is shown on the upper part of the key is typed out. For example, if you press **2**, 2 is typed out; if you press **Shift + 2**, @ is typed out.

The keys F1-F12 at the top row of the keyboard are function keys for multimedia control, as indicated by the icon on the key. Press the function key to enable the task represented by the icon. For example, pressing F1 mutes the audio (see the table below).

However, if the function keys F1-F12 are needed for specific software applications, multimedia functionality can be disabled by pressing **fn + esc**. Later, multimedia control can be invoked by pressing **fn** and the respective function key. For example, mute audio by pressing **fn + F1**.

**Table 13. Function key primary behavior**

| Function key | Primary behavior                                                                                                                                                                                                                        |
|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| F1           | Mute or unmute audio                                                                                                                                                                                                                    |
| F2           | Decrease volume                                                                                                                                                                                                                         |
| F3           | Increase volume                                                                                                                                                                                                                         |
| F4           | Play or Pause                                                                                                                                                                                                                           |
| F5           | Turn on or turn off keyboard backlight.<br> <b>NOTE:</b> Toggle to cycle the keyboard backlight status through off, low-backlight, and high-backlight. |
| F6           | Decrease brightness                                                                                                                                                                                                                     |
| F7           | Increase brightness                                                                                                                                                                                                                     |
| F8           | Switch to external display                                                                                                                                                                                                              |
| F10          | Print screen                                                                                                                                                                                                                            |
| F11          | Home                                                                                                                                                                                                                                    |
| F12          | End                                                                                                                                                                                                                                     |

The **fn** key is also used with selected keys on the keyboard to invoke secondary functions.

**Table 14. Secondary behavior**

| Function key     | Secondary behavior            |
|------------------|-------------------------------|
| fn + esc         | Toggle fn-key lock            |
| fn + S           | Toggle scroll lock            |
| fn + B           | Pause or Break                |
| fn + R           | System request                |
| fn + P           | Privacy screen                |
| fn + Copilot     | Open the application menu     |
| fn + spacebar    | Open the emoji menu           |
| fn + T           | Toggle ultra performance mode |
| fn + Left arrow  | Home                          |
| fn + Right arrow | End                           |

## Keys with alternate characters

There are other keys on your keyboard with alternate characters. The symbols that are shown at the bottom of these keys are the main characters that are displayed when the key is pressed; the symbols that are shown at the top of these keys are displayed when the key is pressed with the shift key. For example, if you press **2**, **2** is displayed; if you press **Shift** and **2**, **@** is displayed.

# Camera

The following table lists the camera specifications of your Dell 14S DS14260.

**Table 15. Camera specifications**

| Description                 | Values                                                   |
|-----------------------------|----------------------------------------------------------|
| Number of cameras           | One                                                      |
| Camera type                 | FHD RGB and IR with User Presence Detection (UPD) camera |
| Camera location             | Front camera                                             |
| Camera sensor type          | CMOS sensor technology                                   |
| Camera resolution:          |                                                          |
| Still image                 | 2.07 megapixels                                          |
| Video                       | 1920 x 1080 (FHD) at 30 fps                              |
| Infrared camera resolution: |                                                          |
| Video                       | 360 x 360 at 15 fps                                      |
| Diagonal viewing angle:     |                                                          |
| Camera                      | 83 degrees                                               |
| Infrared camera             | 81.30 degrees                                            |

# Touchpad

The following table lists the touchpad specifications of your Dell 14S DS14260.

**Table 16. Touchpad specifications**

| Description          | Values                                                                                                                 |
|----------------------|------------------------------------------------------------------------------------------------------------------------|
| Touchpad resolution: | > 300 dpi                                                                                                              |
| Touchpad dimensions: |                                                                                                                        |
| Horizontal           | 128 mm (5.04 in.)                                                                                                      |
| Vertical             | 78.50 mm (3.09 in.)                                                                                                    |
| Touchpad gestures    | For more information about the touchpad gestures available on Windows, search <a href="#">Microsoft Support Site</a> . |

# Power adapter

The following table lists the power adapter specifications of your Dell 14S DS14260.

**Table 17. Power-adapter specifications**

| Description                                                                                                                                                                                                                                                                          | Values                                                                                                               |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------|
| Type                                                                                                                                                                                                                                                                                 | 65 W AC adapter, USB Type-C                                                                                          |
| Power-adapter dimensions:                                                                                                                                                                                                                                                            |                                                                                                                      |
| Height                                                                                                                                                                                                                                                                               | 26.50 mm (1.04 in.)                                                                                                  |
| Width                                                                                                                                                                                                                                                                                | 60.00 mm (2.36 in.)                                                                                                  |
| Depth                                                                                                                                                                                                                                                                                | 96.50 mm (3.80 in.)                                                                                                  |
| Input voltage                                                                                                                                                                                                                                                                        | 100 VAC to 240 VAC                                                                                                   |
| Input frequency                                                                                                                                                                                                                                                                      | 50 Hz to 60 Hz                                                                                                       |
| Input current (maximum)                                                                                                                                                                                                                                                              | 1.70 A                                                                                                               |
| Output current (continuous)                                                                                                                                                                                                                                                          | <ul style="list-style-type: none"><li>• 20 V/3.25 A</li><li>• 15 V/3 A</li><li>• 9 V/3 A</li><li>• 5 V/3 A</li></ul> |
| Rated output voltage                                                                                                                                                                                                                                                                 | <ul style="list-style-type: none"><li>• 20 VDC</li><li>• 15 VDC</li><li>• 9 VDC</li><li>• 5 VDC</li></ul>            |
| Temperature range:                                                                                                                                                                                                                                                                   |                                                                                                                      |
| Operating                                                                                                                                                                                                                                                                            | 0°C to 45°C (32°F to 109°F)                                                                                          |
| Storage                                                                                                                                                                                                                                                                              | –40°C to 70°C (–40°F to 158°F)                                                                                       |
|  <b>CAUTION:</b> Operating and storage temperature ranges may differ among components, so operating or storing the device outside these ranges may impact the performance of specific components. |                                                                                                                      |

## Power adapter requirements of Dell 14S DS14260

 **NOTE:** If you did not purchase the Dell-branded power adapter that is recommended for your computer, ensure that the power adapter you use meets the following requirements.

The following table lists the power adapter requirements for your Dell 14S DS14260.

**Table 18. Power adapter requirements**

| Description                                                                                                                                                                                                                                                          | Value          |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|
| Power that is required from a power adapter to achieve optimal performance                                                                                                                                                                                           | 65 W           |
| Power that charges the computer at a slower speed<br> <b>NOTE:</b> A warning message may appear informing you about the use of a lower-powered adapter and slower charging speed. | Less than 65 W |

**Table 18. Power adapter requirements (continued)**

| Description                                                                                                                                                                                                                                                                                                      | Value                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Minimum power that is required from a power adapter to operate the computer and charge the battery<br> <b>NOTE:</b> A warning message appears informing you about the use of a lower-powered adapter and slower charging speed. | 27 W                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| USB Power Delivery (PD) fast charging                                                                                                                                                                                                                                                                            | Supported                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| ExpressCharge mode                                                                                                                                                                                                                                                                                               | Supported<br> <b>NOTE:</b> Ensure that the computer with a 70 Wh battery is connected to a 65 W power adapter for this feature to be supported.<br> <b>NOTE:</b> ExpressCharge mode must also be enabled in the BIOS Setup screen. Select <b>Power &gt; Battery Configuration &gt; ExpressCharge</b> , then press <b>Enter</b> |

## Battery

The following table lists the battery specifications of your Dell 14S DS14260.

**Table 19. Battery specifications**

| Description                                                                                                                                                                                                                                                                                                                                                                 | Values                                                                                                                                       |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|
| Battery type                                                                                                                                                                                                                                                                                                                                                                | 3-cell, 70 Wh, Lithium Ion Polymer, ExpressCharge                                                                                            |
| Battery voltage                                                                                                                                                                                                                                                                                                                                                             | 15.60 VDC                                                                                                                                    |
| Battery weight (maximum)                                                                                                                                                                                                                                                                                                                                                    | 0.27 kg (0.60 lb)                                                                                                                            |
| Battery dimensions:                                                                                                                                                                                                                                                                                                                                                         |                                                                                                                                              |
| Height                                                                                                                                                                                                                                                                                                                                                                      | 5.65 mm (0.22 in.)                                                                                                                           |
| Width                                                                                                                                                                                                                                                                                                                                                                       | 272.00 mm (10.71 in.)                                                                                                                        |
| Depth                                                                                                                                                                                                                                                                                                                                                                       | 84.70 mm (3.33 in.)                                                                                                                          |
| Temperature range:                                                                                                                                                                                                                                                                                                                                                          |                                                                                                                                              |
| Operating                                                                                                                                                                                                                                                                                                                                                                   | <ul style="list-style-type: none"> <li>Charge: 0°C to 50°C (32°F to 122°F)</li> <li>Discharge: 0°C to 60°C (32°F to 140°F)</li> </ul>        |
| Storage                                                                                                                                                                                                                                                                                                                                                                     | -20°C to 65°C (-4°F to 149°F)                                                                                                                |
| Battery operating time                                                                                                                                                                                                                                                                                                                                                      | Varies depending on operating conditions and can significantly reduce under certain power-intensive conditions                               |
| Battery charging time (approximate)<br> <b>NOTE:</b> You can control the charging time, duration, start and end time, and so on, using the settings on the Dell Optimizer application. For more information about Dell Optimizer application, search <a href="#">Dell Support Site</a> . | <ul style="list-style-type: none"> <li>ExpressCharge: 2 hours</li> <li>Standard charge: 3 hours (when the computer is turned off)</li> </ul> |
| Coin-cell battery                                                                                                                                                                                                                                                                                                                                                           | Not supported                                                                                                                                |
|  <b>CAUTION:</b> Operating and storage temperature ranges may differ among components, so operating or storing the device outside these ranges may impact the performance of specific components.                                                                                        |                                                                                                                                              |

Table 19. Battery specifications (continued)

| Description                                                                                                                                                                                        | Values |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|
|  <b>CAUTION:</b> Dell Technologies recommends that you charge the battery regularly for optimal power consumption. |        |

Power requirements (for computers shipped with 3-cell, 70 Wh battery)

 **NOTE:** The information in this section is applicable to the European Union (EU) countries.

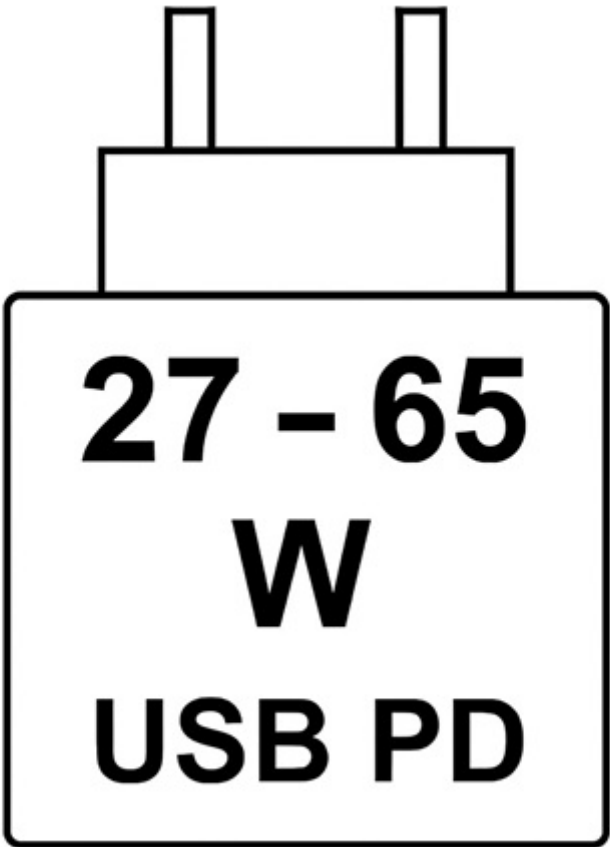


Figure 8. Pictogram for 70 Wh battery

The power that is delivered by the charger must be between a minimum of 27 Watts that is required by the radio equipment, and a maximum of 65 Watts in order to achieve the maximum charging speed.

This computer supports USB Power Delivery (PD) fast charging.

# Display

The following table lists the display specifications of your Dell 14S DS14260.

**Table 20. Display specifications**

| Description                             | Option one                                                                                                 | Option two                                                                                                 | Option three                                                                                               | Option four                                | Option five                                |
|-----------------------------------------|------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|--------------------------------------------|--------------------------------------------|
| Display type                            | 14-inch, Full High Definition+ (FHD+)                                                                      | 14-inch, Full High Definition+ (FHD+)                                                                      | 14-inch, Quad High Definition (QHD+)                                                                       | 14-inch, Full High Definition+ (FHD+ OLED) | 14-inch, Full High Definition+ (FHD+ OLED) |
| Display-panel technology                | WLED                                                                                                       | WLED                                                                                                       | WLED                                                                                                       | Organic Light Emitting Diode (OLED)        | Organic Light Emitting Diode (OLED)        |
| Display-panel dimensions (active area): |                                                                                                            |                                                                                                            |                                                                                                            |                                            |                                            |
| Height                                  | 188.50 mm (7.42 in.)                                                                                       | 188.50 mm (7.42 in.)                                                                                       | 188.50 mm (7.42 in.)                                                                                       | 188.64 mm (7.42 in.)                       | 188.64 mm (7.42 in.)                       |
| Width                                   | 301.59 mm (11.87 in.)                                                                                      | 301.59 mm (11.87 in.)                                                                                      | 301.59 mm (11.87 in.)                                                                                      | 301.82 mm (11.87 in.)                      | 301.82 mm (11.87 in.)                      |
| Diagonal                                | 355.60 mm (14.00 in.)                                                                                      | 355.60 mm (14.00 in.)                                                                                      | 355.60 mm (14.00 in.)                                                                                      | 355.92 mm (14.00 in.)                      | 355.92 mm (14.00 in.)                      |
| Display-panel native resolution         | 1920 x 1200                                                                                                | 1920 x 1200                                                                                                | 2560 x 1600                                                                                                | 1920 x 1200                                | 1920 x 1200                                |
| Luminance (typical)                     | 400 nits                                                                                                   | 400 nits                                                                                                   | 500 nits                                                                                                   | 300 nits                                   | 300 nits (OLED only)                       |
| Megapixels                              | 2.30                                                                                                       | 2.30                                                                                                       | 4.10                                                                                                       | 2.30                                       | 300 nits (OLED only)                       |
| Color gamut                             | 45% NTSC                                                                                                   | 100% sRGB                                                                                                  | 100% sRGB                                                                                                  | 100% DCI-P3 (90% min)                      | 100% DCI-P3 (90% min)                      |
| Pixels Per Inch (PPI)                   | 162                                                                                                        | 162                                                                                                        | 216                                                                                                        | 162                                        | 162                                        |
| Contrast ratio (typical)                | <ul style="list-style-type: none"> <li>Minimum: 800:1</li> <li>Typical: 1000:1</li> </ul>                  | <ul style="list-style-type: none"> <li>Minimum: 800:1</li> <li>Typical: 1000:1</li> </ul>                  | <ul style="list-style-type: none"> <li>Minimum: 1000:1</li> <li>Typical: 1200:1</li> </ul>                 | Typical: 100,000:1                         | Typical: 100,000:1                         |
| Response time (maximum)                 | 35 ms                                                                                                      | 35 ms                                                                                                      | 35 ms                                                                                                      | 1 ms                                       | 1 ms                                       |
| Refresh rate                            | 48 Hz to 60 Hz (fixed)                                                                                     | 48 Hz to 60 Hz (fixed)                                                                                     | 48 Hz to 120 Hz (variable)                                                                                 | 60 Hz (fixed)                              | 60 Hz (fixed)                              |
| Horizontal view angle                   | <ul style="list-style-type: none"> <li>Minimum: +/- 80 degrees</li> <li>Typical: +/- 89 degrees</li> </ul> | <ul style="list-style-type: none"> <li>Minimum: +/- 80 degrees</li> <li>Typical: +/- 89 degrees</li> </ul> | <ul style="list-style-type: none"> <li>Minimum: +/- 80 degrees</li> <li>Typical: +/- 89 degrees</li> </ul> | Minimum: +/- 85 degrees                    | Minimum: +/- 85 degrees                    |
| Vertical view angle                     | <ul style="list-style-type: none"> <li>Minimum: +/- 80 degrees</li> <li>Typical: +/- 85 degrees</li> </ul> | <ul style="list-style-type: none"> <li>Minimum: +/- 80 degrees</li> <li>Typical: +/- 89 degrees</li> </ul> | <ul style="list-style-type: none"> <li>Minimum: +/- 80 degrees</li> <li>Typical: +/- 89 degrees</li> </ul> | Minimum: +/- 85 degrees                    | Minimum: +/- 85 degrees                    |
| Pixel pitch                             | 0.157 mm                                                                                                   | 0.157 mm                                                                                                   | 0.149 mm                                                                                                   | 0.157 mm                                   | 0.157 mm                                   |

**Table 20. Display specifications (continued)**

| Description                 | Option one    | Option two | Option three  | Option four   | Option five   |
|-----------------------------|---------------|------------|---------------|---------------|---------------|
| Power consumption (maximum) | 3.7 W         | 4.5 W      | 5.7 W         | 5.7 W         | 6.0 W         |
| Anti-glare vs glossy finish | Anti-Glare    | Anti-Glare | Anti-Glare    | Anti-Glare    | Glossy finish |
| Touch options               | Not supported | Supported  | Not supported | Not supported | Supported     |

## Sensors

The following table lists the sensors of your Dell 14S DS14260.

**Table 21. Sensor**

| Sensor support                                                                                                                                                                                                           |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| IR User Proximity Detection                                                                                                                                                                                              |
| Accelerometer                                                                                                                                                                                                            |
| Adaptive Thermal Performance (laptop compared with desktop mode) requires Gyro/Accelerometer<br> <b>NOTE:</b> This is for thermal only. |
| Hall Effect Sensor                                                                                                                                                                                                       |
| Sensor Hub (integrated)                                                                                                                                                                                                  |

## GPU—Integrated

The following table lists the specifications of the integrated Graphics Processing Unit (GPU) supported by your Dell 14S DS14260.

**Table 22. GPU—Integrated**

| Controller     | External display support                                                                                                                                      | Memory size          | Processor                                                                                                                                                                               |
|----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Intel Graphics | <ul style="list-style-type: none"> <li>One HDMI 2.1 (TMDS) port</li> <li>Two Thunderbolt 4 (40 Gbps) with Power Delivery and DisplayPort 2.1 ports</li> </ul> | Shared system memory | <ul style="list-style-type: none"> <li>Series 3 Intel Core Ultra 5 processors</li> <li>Series 3 Intel Core Ultra 7 processors</li> <li>Series 3 Intel Core Ultra 9 processor</li> </ul> |
| Intel Arc B390 | <ul style="list-style-type: none"> <li>One HDMI 2.1 (TMDS) port</li> <li>Two Thunderbolt 4 (40 Gbps) with Power Delivery and DisplayPort 2.1 ports</li> </ul> | Shared system memory | Series 3 Intel Core Ultra X7 processor                                                                                                                                                  |

# External display support

The following table lists the external display support for your Dell 14S DS14260.

Table 23. External display support

| Graphics card  | Supported external displays with laptop display enabled | Supported external displays with laptop display disabled |
|----------------|---------------------------------------------------------|----------------------------------------------------------|
| Intel Graphics | 3                                                       | 4                                                        |
| Intel Arc B390 | 3                                                       | 4                                                        |

# Hardware security

The following table lists the hardware security of your Dell 14S DS14260.

Table 24. Hardware security

| Hardware security                                                          |
|----------------------------------------------------------------------------|
| FIPS 140-3 certification for TPM                                           |
| TCG Certification for TPM (Trusted Computing Group)                        |
| TPM 2.0 discrete                                                           |
| Post Quantum Cryptography(PQC) - EC                                        |
| Chassis Intrusion Detection                                                |
| BIOS - TPM clear and/or system boot lock after chassis intrusion detection |

# Operating and storage environment

This table lists the operating and storage specifications of your Dell 14S DS14260.

**Airborne contaminant level:** G1 as defined by ISA-S71.04-1985

Table 25. Computer environment

| Description                                                                                                                                                                                                                                                                         | Operating                                   | Storage                                       |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------|-----------------------------------------------|
| Temperature range                                                                                                                                                                                                                                                                   | 0°C to 35°C (32°F to 95°F)                  | –40°C to 65°C (–40°F to 149°F)                |
| Relative humidity (maximum)                                                                                                                                                                                                                                                         | 10% to 90% (non-condensing)                 | 0% to 95% (non-condensing)                    |
| Vibration (maximum)*                                                                                                                                                                                                                                                                | 0.66 GRMS                                   | 1.30 GRMS                                     |
| Shock (maximum)                                                                                                                                                                                                                                                                     | 110 G†                                      | 160 G†                                        |
| Altitude range                                                                                                                                                                                                                                                                      | –15.20 m to 3048 m (–49.87 ft to 10,000 ft) | –15.20 m to 10,668 m (–49.87 ft to 35,000 ft) |
|  <b>CAUTION:</b> Operating and storage temperature ranges may differ among components, so operating or storing the device outside these ranges may impact the performance of specific components. |                                             |                                               |

\* Measured using a random vibration spectrum that simulates the user environment.

† Measured using a 2 ms half-sine pulse.

## Dell low blue light display

 **WARNING:** Prolonged exposure to blue light from the display may lead to long-term effects such as eye strain, eye fatigue, or damage to the eyes.

Blue light is a color in the light spectrum which has a short wavelength and high energy. Chronic exposure to blue light, particularly from digital sources may disrupt sleep patterns and cause long-term effects such as eye strain, eye fatigue, or damage to the eyes.

The display on this computer is designed to minimize blue light and complies with TÜV Rheinland's requirement for low blue light displays.

Low blue light mode is enabled at the factory, so no further configuration is necessary.

To reduce the risk of eye strain, it is also recommended that you:

- Position the display at a comfortable viewing distance between 20 and 28 inches (50 cm and 70 cm) from your eyes.
- Blink frequently to moisten your eyes, wet your eyes with water, or apply suitable eye drops.
- Take an extended break for 20 minutes every two hours.
- Look away from your display, and gaze at a distant object at 20 ft (609.60 cm) away for at least 20 seconds during each break.

## ComfortView

 **WARNING:** Prolonged exposure to blue light from the display may lead to long-term effects such as eye strain, eye fatigue, or damage to the eyes.

Blue light is a color in the light spectrum which has a short wavelength and high energy. Chronic exposure to blue light, particularly from digital sources, may disrupt sleep patterns and cause long-term effects such as eye strain, eye fatigue, or damage to the eyes.

Dell ComfortView software technology reduces harmful blue light emissions to make extended screen time easy on your eyes.

ComfortView mode can be enabled and configured using the Dell CinemaColor application.

ComfortView mode complies with TÜV Rheinland's requirement for low blue light displays.

To reduce the risk of eye strain, it is also recommended that you:

- Position the display at a comfortable viewing distance between 20 and 28 inches (50 cm and 70 cm) from your eyes.
- Blink frequently to moisten your eyes, wet your eyes with water, or apply suitable eye drops.
- Take an extended break for 20 minutes every two hours.
- Look away from your display, and gaze at a distant object at 20 ft (609.60 cm) away for at least 20 seconds during each break.

## Dell Optimizer

Dell Optimizer is an AI-based software application that allows you to customize your computer settings for power and battery, and more.

For Dell 14S DS14260 with Dell Optimizer, you can:

- Extend the battery life of your computer with Intelligent Battery Extender and Dynamic Charge.
- Tune the performance, power consumption, cooling, and fan noise with selectable thermal modes.
- Access and secure your computer depending on your physical presence.
- Download and redeem the apps that are purchased with your computer.

For more information about configuring and using these features, search for *Dell Optimizer* at the [Dell Support Site](#).

## Dell support policy

For information about Dell support policy, search [Dell Support Site](#).

# Getting help and contacting Dell Technologies

## Self-help resources

You can get information and help on Dell Technologies products and services using these self-help resources:

**Table 26. Self-help resources**

| Self-help resources                                                                                                                  | Resource location                                                                                                                                                                                                                                                                                                                                                                                                                          |
|--------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Information about Dell Technologies products and services                                                                            | <a href="#">Dell Site</a>                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Contact Support                                                                                                                      | In Windows search, type <code>Contact Support</code> , and press Enter.                                                                                                                                                                                                                                                                                                                                                                    |
| Online help for operating system                                                                                                     | <a href="#">Windows Support Site</a>                                                                                                                                                                                                                                                                                                                                                                                                       |
| Access top solutions, diagnostics, drivers and downloads, and learn more about your computer through videos, manuals, and documents. | <p>Your Dell Technologies computer is uniquely identified using a Service Tag or Express Service Code. To view relevant support resources for your Dell Technologies computer, enter the Service Tag or Express Service Code at <a href="#">Dell Support Site</a>.</p> <p>For more information about how to find the Service Tag for your computer, see <a href="#">Instructions on how to find your Service Tag or Serial Number</a>.</p> |
| Dell Technologies knowledge base articles                                                                                            | <ol style="list-style-type: none"> <li>1. Go to <a href="#">Dell Support Site</a>.</li> <li>2. On the menu bar at the top of the Support page, select <b>Support &gt; Support Library</b>.</li> <li>3. In the Search field on the Support Library page, type the keyword, topic, or model number, and then click or tap the search icon to view the related articles.</li> </ol>                                                           |

## Contacting Dell Technologies

To contact Dell Technologies for sales, technical support, or customer service issues, see [Contact Support at Dell Support Site](#).

 **NOTE:** Availability of the services may vary depending on the country or region, and product.

 **NOTE:** If you do not have an active Internet connection, you can find contact information about your purchase invoice, packing slip, bill, or Dell Technologies product catalog.

## Revision history

Tracks all updates that are made to the document. It typically includes the date of change, version number, and a brief description of the modification. This log helps maintain transparency, accountability, and a clear timeline of progress.

**Table 27. Revision history**

| Revision | Date     | Description            |
|----------|----------|------------------------|
| A00      | May 2026 | Original publish date. |