Dell 15

D15261

Setup and Specifications

Regulatory Model: P214G
Regulatory Type: P214G001
August 2026
Rev. A00

Notes, cautions, and warnings

NOTE: A NOTE indicates important information that helps you make better use of your product.

CAUTION: A CAUTION indicates either potential damage to hardware or loss of data and tells you how to avoid the problem.

WARNING: A WARNING indicates a potential for property damage, personal injury, or death.

Copyright © Dell Inc. All Rights Reserved. Dell Technologies, Dell, and other trademarks are trademarks of Dell Inc. or its subsidiaries. Other trademarks may be trademarks of their respective owners.

Contents

Chapter 1: Views of Dell 15 D15261 4

Right 4
Left 4
Top 5
Front 6
Bottom 7
Locate the Service Tag or Express Service Code label of your computer 7
Battery-status light 8

Chapter 2: Set up your Dell 15 D15261 9

Chapter 3: Specifications of Dell 15 D15261 11

Dimensions and weight 11
Processor 11
Chipset 12
Operating system 12
Memory 12
External ports and slots 13
Internal slots 13
Wireless module 13
Audio 14
Storage 14
Keyboard 15
Keyboard shortcuts 15
Camera 17
Touchpad 17
Power adapter 18
Power adapter requirements 18
Battery 19
Power requirements 20
Display 21
Fingerprint reader (optional) 21
Sensors 22
External display support 22
Hardware security 22
Operating and storage environment 23
Dell Optimizer 23
Dell support policy 23

Chapter 4: Getting help and contacting Dell Technologies 24

Chapter 5: Getting help and contacting Dell 25

Chapter 6: Revision history 26

1

Views of Dell 15 D15261

Right



Figure 1. Right view

1. **Global headset jack**

   Connect headphones or a headset (headphone and microphone combo).

2. **USB 3.2 Gen 1 (5 Gbps) port**

   Connect devices such as external storage devices and printers. Provides data transfer speeds of up to 5 Gbps.

3. **Wedge-shaped lock slot**

   Connect a security cable to prevent unauthorized movement of your computer.

Left



Figure 2. Left view

1. **HDMI 2.1 port**

   Connect to a TV, external display, or another HDMI-in enabled device. Provides video and audio output.

2. **USB 3.2 Gen 1 (5 Gbps) port**

   Connect devices such as external storage devices and printers. Provides data transfer speeds of up to 5 Gbps.

3. **USB 3.2 Gen 2 (10 Gbps) Type-C ports with Power Delivery and DisplayPort**

   Connect devices such as external storage devices and printers. Provides data transfer speeds up to 10 Gbps.

   Supports Power Delivery that enables two-way power supply between devices. Provides up to 15 W power output that enables faster charging.

   NOTE: A USB Type-C to DisplayPort adapter (sold separately) is required to connect a DisplayPort device.

NOTE: The system can also be powered using the Type-C port.

4. **Battery-status light**

   Indicates the battery-charge status.White light—Power adapter is connected and the battery is fully charging.

Top

CAUTION: The maximum operating angle for the display-panel hinge is 135 degrees.

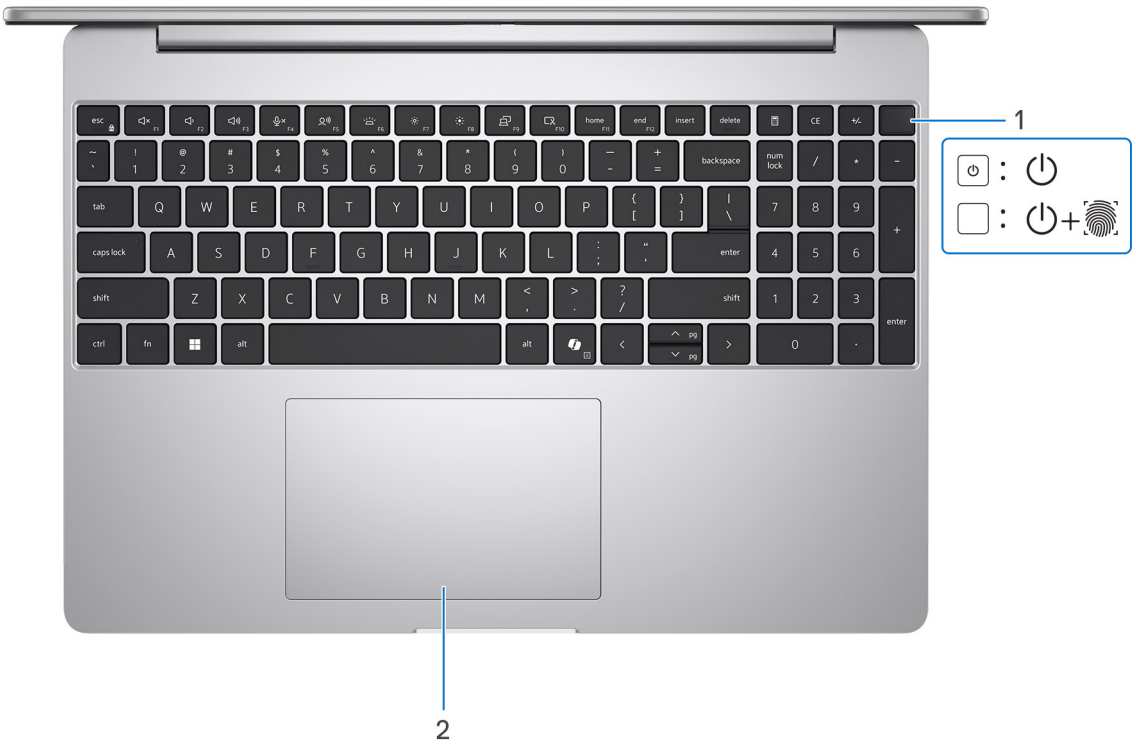

Figure 3. Top view

1. **Power button with optional fingerprint reader**

   Press to turn on the computer if it is turned off, in sleep state, or in hibernate state.

   When the computer is turned on, press the power button to put the computer into sleep state; press and hold the power button for ten seconds to force shut-down the computer.

   If the power button has a fingerprint reader, place your finger on the power button to log in.



Figure 4. Active area of the fingerprint reader

NOTE: The highlighted area indicates the actual active fingerprint reader area, and the image is for illustration purposes only.

NOTE: You can customize power-button behavior in Windows. For more information, see Manuals at Dell Support Site.

2. **Touchpad**

   Move your finger on the touchpad to move the mouse pointer. Tap to left-click and two fingers tap to right-click.

Front

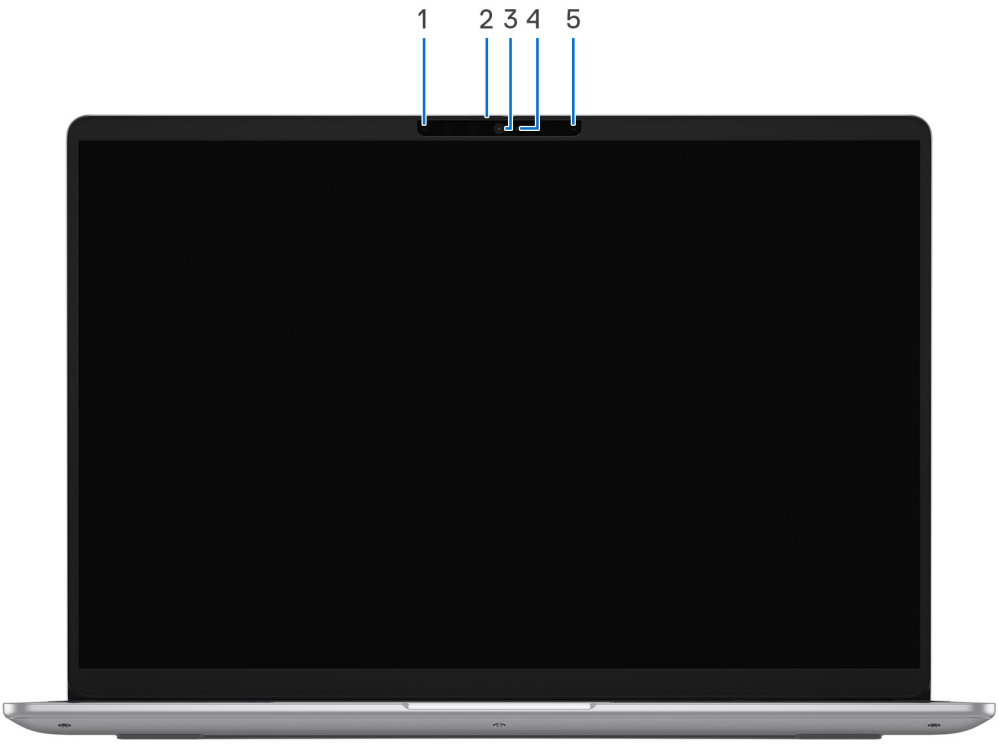

Figure 5. Front view

1. **Left microphone**

   Provides digital sound input for audio recording, voice calls, and so on.

2. **Privacy shutter**

   Slide the privacy shutter to cover the camera lens and protect your privacy when the camera is not in use.

3. **Camera**

   Enables you to video chat, capture photos, and record videos.

4. **Camera-status light**

   Turns on when the camera is in use.

5. **Right microphone**

   Provides digital sound input for audio recording, voice calls, and so on.

Bottom

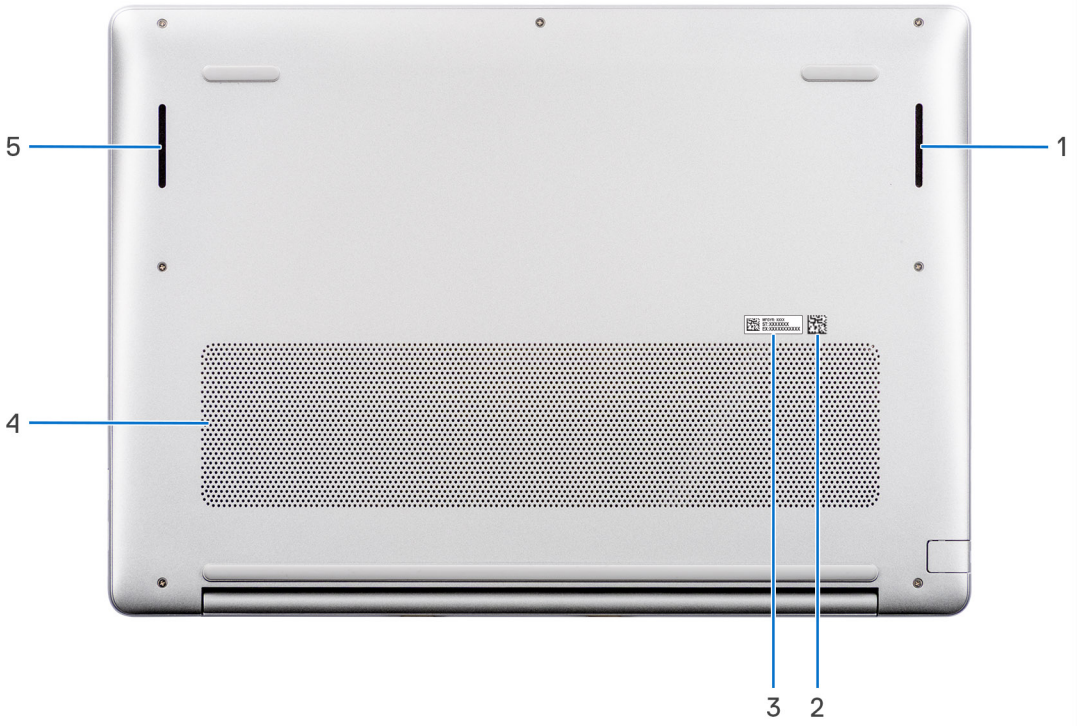

Figure 6. Bottom view

1. **Right speaker**

   Provides audio output.

2. **MyDell QR code**

   MyDell is your hub for content that is personalized to your Dell 15 D15261, including videos, articles, manuals, and access to support.

3. **Service Tag label**

   The Service Tag is a unique alphanumeric identifier that enables Dell service technicians to identify the hardware components in your computer and access warranty information. The Express Service Code is a numeric version of the Service Tag.

4. **Air vents**

   Air vents provide ventilation for your computer. Clogged air vents can cause overheating and can affect your computer's performance and potentially cause hardware issues. Keep the air vents clear of obstructions and clean them regularly to prevent the build-up of dust and dirt. For more information about cleaning air vents, search for articles in the Knowledge Base Resource at Dell Support Site.

5. **Left speaker**

   Provides audio output.

Locate the Service Tag or Express Service Code label of your computer

The service tag is a unique alphanumeric identifier that allows Dell service technicians to identify the hardware components in your computer and access warranty information. The Express Service Code is a numeric version of the Service Tag.

For more information about how to find the Service Tag of your computer, search Dell Support Site.



Figure 7. Service Tag/Express Service Code location

Battery-status light

The following table lists the battery-status light of your Dell 15 D15261 .

Table 1. Battery-status light behavior

Power source	LED behavior	System power state	Battery charge level
AC adapter	Off	S0 or S5	100%
AC adapter	Solid white	S0 or S5	< 100%
Battery	Off	S0 or S5	11-100%
Battery	Solid amber	S0 or S5	< 10%

- S0 (ON): The computer is turned on.
- S3 (Sleep): Screen is off, and the computer is in sleep mode.
- S4 (Hibernate): The computer consumes the least power in the Hibernate state than in the ON or OFF state. The computer is almost in the OFF state. The context data is written to a storage device, allowing you to resume from where you left after the computer is turned on.
- S5 (OFF): The computer is in a shutdown state.

2

Set up your Dell 15 D15261

About this task

NOTE: The images in this document may differ from your computer depending on the configuration you ordered.

Steps

1. Connect the power adapter and press the power button.

   NOTE: To conserve battery power, the battery might enter power-saving mode. Ensure that the power adapter is connected before turning on the computer.



Figure 8. Connect the power adapter and press the power button

2. Finish the operating system setup.

   For Ubuntu:

   Follow the on-screen instructions to complete the setup. For more information about installing and configuring Ubuntu, search Dell Support Site.

   For Windows:

   Follow the on-screen instructions to complete the setup. When setting up, it is recommended that you:

   - Connect to a network for Windows updates.

     NOTE: If connecting to a secured wireless network, enter the password for the wireless network access when prompted.

   - If connected to the Internet, sign-in with an existing Microsoft account or create an account. If not connected to the Internet, create an offline account.
   - On the **Support and Protection** screen, enter your contact details.

3. Locate and use Dell apps from the Windows Start menu. This step is optional but recommended.

Table 2. Locate Dell apps

Resources	Description
	**Dell Product Registration** Register your computer with Dell.
	**Dell Help & Support** Access help and support for your computer.
	**SupportAssist** SupportAssist is a proactive and predictive technology that offers automated technical support for Dell computers. It proactively monitors both hardware and software, addressing performance issues, preventing security threats, and automating engagement with Dell Technical Support. For more information, see the SupportAssist documentation at Dell Support Site. **NOTE:** In SupportAssist, click the warranty expiry date to renew or upgrade your warranty.

3

Specifications of Dell 15 D15261

Dimensions and weight

The following table lists the height, width, depth, and weight of your Dell 15 D15261 .

Table 3. Dimensions and weight

Description	Values
Front height	11.15 mm (0.44 in.)
Rear height	14.37 mm (0.56 in.)
Width	341.17 mm (13.43 in.)
Depth	240.70 mm (9.48 in.)
Minimum Weight **NOTE:** The weight of your computer depends on the configuration that you ordered.	1.536 kg (3.39 lbs)

Processor

The following table lists the details of the processors that are supported on your Dell 15 D15261 .

Table 4. Processor

Description	Option one	Option two	Option three	Option four
Type	Series 3 Intel Core 3 304	Series 3 Intel Core 5 315	Series 3 Intel Core 5 320	Series 3 Intel Core 7 350
Wattage	25 W	25 W	25 W	25 W
Total cores	5	6	6	6
Number of Performance-cores	2	2	2	2
Number of Efficient-cores	4	4	4	4
Total threads **NOTE:** : Intel Hyper-Threading Technology is only available on Performance-cores.	5	6	6	6
Speed	Up to 4.30 GHz	Up to 4.40 GHz	Up to 4.60 GHz	Up to 4.80 GHz
Performance-core frequency				
Base frequency	1.50 GHz	1.50 GHz	1.50 GHz	1.50 GHz

Table 4. Processor (continued)

Description	Option one	Option two	Option three	Option four
Maximum turbo frequency	Up to 4.30 GHz	Up to 4.40 GHz	Up to 4.60 GHz	Up to 4.80 GHz
Efficient-core frequency				
Base frequency	1.40 GHz	1.40 GHz	1.40 GHz	1.40 GHz
Maximum turbo frequency	3.30 GHz	3.30 GHz	3.40 GHz	3.60 GHz

Chipset

The following table lists the details of the chipset that is supported on your Dell 15 D15261 .

Table 5. Chipset

Description	Values
Chipset	Integrated in the processor
Processor	Intel Core Processor C3/C5/C7
DRAM bus width	64-bit
Flash EPROM	32 MB
PCIe bus	Up to Gen4

Operating system

Your Dell 15 D15261 supports the following operating systems:

- Windows 11 Home
- Windows 11 Pro
- Ubuntu Linux 24.04 LTS

Memory

The following table lists the memory specifications that are supported by your Dell 15 D15261 .

Table 6. Memory specifications

Description	Values
Memory slots	One SODIMM slot
Memory type	DDR5
Memory speed	5600 MT/s
Maximum memory configuration	32 GB
Minimum memory configuration	8 GB
Memory size per slot	8 GB, 16 GB, 32 GB

Table 6. Memory specifications (continued)

Description	Values
Memory configurations supported	• 8 GB: 1 x 8 GB, DDR5, 5600 MT/s, single-channel • 16 GB: 1 x 16 GB, DDR5, 5600 MT/s, single-channel • 32 GB: 1 x 32 GB, DDR5, 5600 MT/s, single-channel

External ports and slots

The following table lists the external ports and slots on your Dell 15 D15261 .

Table 7. External ports and slots

Description	Values
USB ports	• Two USB 3.2 Gen 2 (10 Gbps) ports with Power Delivery and DisplayPort • Two USB 3.2 Gen 1 (5 Gbps) ports
Audio port	Global headset jack
Video port(s)	• One HDMI 2.1 port • Two USB-C ports (DP 1.4)
Media-card reader	Not supported
Power-adapter port	Supported via USB Type-C
Security-cable slot	One Wedge-shaped lock slot

Internal slots

The following table lists the internal slots of your Dell 15 D15261 .

Table 8. Internal slots

Description	Values
M.2	• One M.2 2230 slot for WiFi and Bluetooth combo card • One M.2 2230 slot for solid state drive **NOTE:** To learn more about the features of different types of M.2 cards, search Dell Support Site.

Wireless module

The following table lists the Wireless Local Area Network (WLAN) modules that are supported on your Dell 15 D15261 .

Table 9. Wireless module specifications

Description	Option one	Option two
Model number	MediaTek MT7920	Intel AX211
Transfer rate	Up to 1200 Mbps	Up to 2400 Mbps
Frequency bands supported	• 2.4 GHz	• 2.4 GHz

Table 9. Wireless module specifications (continued)

Description	Option one	Option two
	• 5 GHz	• 5 GHz • 6 GHz
Wireless standards	• Wi-Fi 802.11a/b/g • Wi-Fi 4 (WiFi 802.11n) • Wi-Fi 5 (WiFi 802.11ac)	• Wi-Fi 802.11a/b/g • Wi-Fi 4 (Wi-Fi 802.11n) • Wi-Fi 5 (Wi-Fi 802.11ac) • Wi-Fi 6E (WiFi 802.11ax) • Wi-Fi 7 (WiFi 802.11be)
Encryption	• 128-bit AES-CCMP • 256-bit AES-GCMP • 256-GMAC	• 64-bit/128-bit WEP • AES-CCMP • TKIP
Bluetooth wireless card **NOTE:** The functionality of the Bluetooth wireless card may vary based on the operating system.	Bluetooth 5.4 wireless card	Bluetooth 5.4 wireless card

Audio

The following table lists the audio specifications of your Dell 15 D15261 .

Table 10. Audio specifications

Description	Values
Audio controller	ALC3356B
Stereo conversion	Supported
Internal audio interface	SoundWire interface
External audio interface	One Universal Audio port
Number of speakers	2
Internal-speaker amplifier	Supported
External volume controls	Keyboard shortcut controls
Speaker output:	
Average	2.0 W
Peak	2.5 W
Microphone	Digital-array microphones in camera assembly

Storage

This section lists the storage options on your Dell 15 D15261 .

Your Dell D15261 supports one M.2 2230 solid-state drive. The M.2 2230 solid-state drive is the primary storage drive of your computer.

Table 11. Storage specifications

Storage type	Interface type	Capacity
M.2 2230 solid-state drive	Gen4 PCIe NVMe	256 GB, 512 GB, 1 TB

Keyboard

The following table lists the keyboard specifications of your Dell 15 D15261 .

Table 12. Keyboard specifications

Description	Values
Keyboard type	• Backlit keyboard with numpad • Non-backlit keyboard with numpad
Keyboard layout	QWERTY
Number of keys	• 99 keys (Arabic, Canada Bilingual, Chinese Traditional, English International, English US, Greek, Hebrew, Korean, Russian, Thai) • 100 keys (Belgian, Bulgarian, Czech/Slovak, English UK, French European, German, Hungarian, Italian, Nordic, Portuguese, Slovenian, Spanish Castilian, Spanish Latin America, Swiss European, Turkish, Ukrainian) • 103 keys (Japanese)
Key pitch	Horizontal = 18.70 mm Vertical = 18.05 mm
Keyboard shortcuts	Some keys on your keyboard have two symbols on them. These keys can be used to type alternate characters or to perform secondary functions. • To type the alternate character, press Shift and the desired key. • To perform secondary functions, press Fn and the desired key. **NOTE:** You can define the primary behavior of the function keys (F1–F12) by changing **Function Key Behavior** in the BIOS Setup program. **NOTE:** If Copilot in Windows is not available on your computer, pressing the Copilot key launches Windows search. For more information about Copilot in Windows, search Dell Support site. For more information, see Keyboard function keys.

Keyboard shortcuts

NOTE: Keyboard characters may differ depending on the keyboard language configuration. Keys that are used for shortcuts remain the same across all language configurations.

Some keys on your keyboard have two symbols on them. These keys can be used to type alternate characters or to perform secondary functions. The symbol that is shown on the lower part of the key refers to the character that is typed out when the key is pressed. If you press shift and the key, the symbol that is shown on the upper part of the key is typed out. For example, if you press **2**, **2** is typed out; if you press **Shift** + **2**, **@** is typed out.

The keys F1-F12 at the top row of the keyboard are function keys for multimedia control, as indicated by the icon at the bottom of the key. Press the function key to invoke the task represented by the icon. For example, pressing F1 mutes the audio (refer to the table below).

However, if the function keys F1-F12 are needed for specific software applications, multimedia functionality can be disabled by pressing **Fn** + **Esc**. Subsequently, multimedia control can be invoked by pressing **Fn** and the respective function key. For example, mute audio by pressing **Fn** + **F1**.

NOTE: You can also define the primary behavior of the function keys (F1–F12) by changing **Function Key Behavior** in BIOS setup program.

Table 13. List of keyboard shortcuts

Function key	Redefined key (for multimedia control)	Behavior
F1	Fn + F1	Mute audio
F2	Fn + F2	Decrease volume
F3	Fn + F3	Increase volume
F4	Fn + F4	Play previous track/chapter
F5	Fn + F5	Play/Pause
F6	Fn + F6	Play the next track/chapter
F8	Fn + F8	Switch to external display
F9	Fn + F9	Search
F10	Fn + F10	Click keyboard backlight (optional). **NOTE:** Non-backlight keyboards have the F10 function key without the backlight icon and do not support the toggle keyboard backlight function. **NOTE:** Toggle to cycle the keyboard backlight status through off, low-backlight, and high-backlight.
F11	Fn + F11	Decrease brightness
F12	Fn + F12	Increase brightness

The **Fn** key is also used with selected keys on the keyboard to invoke other secondary functions.

Table 14. Secondary behavior

Function key	Behavior
Fn + PrtScr	Turn off/on wireless
Fn + B	Pause/Break
Fn + Insert	Sleep
Fn + S	Toggle scroll lock
Fn + H	Toggle between power and battery-status light/hard-drive activity light
Fn + R	System request
Fn + Ctrl	Open application menu
Fn + Esc	Toggle Fn-key lock
Fn + PgUp	Page up
Fn + PgDn	Page down

Table 14. Secondary behavior (continued)

Function key	Behavior
Fn + Home	Home
Fn + End	End

Camera

The following table lists the camera specifications of your Dell 15 D15261 .

Table 15. Camera specifications

Description	Option one	Option two
Number of cameras	One	Two
Camera type	HD RGB	FHD RGB+IR
Camera location	Front	Front
Camera sensor type	RGB only, CSP	RGB+IR without UPD
Camera resolution:		
Still image	1.0 megapixel	2.0 megapixel
Video	1280 x 720 (VGA/HD) at 30 fps	1920 x 1080 (HD) at 30 fps
Infrared camera resolution:		
Video	Not applicable	360 x 360 at 30 fps
Diagonal viewing angle:		
Camera	82.7 degrees	83.0 degrees
Infrared camera	Not applicable	• 75.6 degrees • 79.1 degrees

Touchpad

The following table lists the touchpad specifications of your Dell 15 D15261 .

Table 16. Touchpad specifications

Description	Values
Touchpad resolution:	
Horizontal	>300 DPI
Vertical	>300 DPI
Touchpad dimensions:	
Horizontal	124.00 mm (4.88 in.)
Vertical	79.00 mm (3.11 in.)
Touchpad gestures	For more information about the touchpad gestures available on Windows, search Microsoft Support Site.

Power adapter

The following table lists the power adapter specifications of your Dell 15 D15261 .

Table 17. Power-adapter specifications

Description	Option one	Option two
Type	45 W USB Type-C	65 W USB Type-C
Power-adapter dimensions:		
Height	26.00 mm (1.02 in.)	26.50 mm (1.04 in.)
Width	40.00 mm (1.57 in.)	60.00 mm (2.36 in.)
Depth	94.00 mm (3.70 in.)	96.50 mm (3.80 in.)
Input voltage	100 VAC – 240 VAC	100 VAC – 240 VAC
Input frequency	50 Hz – 60 Hz	50 Hz – 60 Hz
Input current (maximum)	1.30 A	1.70 A
Output current (continuous)	• 2.25 A • 3.00 A	• 3.00 A • 3.25 A
Rated output voltage	• 5 V • 9 V • 15 V • 20 V	• 5 V • 9 V • 15 V • 20 V
Temperature range:		
Operating	0°C to 35°C (32°F to 95°F)	0°C to 35°C (32°F to 95°F)
Storage	-40°C to 70°C (-40°F to 158°F)	-40°C to 70°C (-40°F to 158°F)
CAUTION: Operating and storage temperature ranges may differ among components, so operating or storing the device outside these ranges may impact the performance of specific components.		

Power adapter requirements

NOTE: If you did not purchase the Dell-branded power adapter that is recommended for your computer, ensure that the power adapter you use meets the following requirements.

The following table lists the power adapter requirements for your Dell 15 D15261 .

Table 18. Power adapter requirements

Description	Value
Power that is required from a power adapter to achieve optimal performance.	65 W
Power that charges the computer at a slower speed. **NOTE:** A warning message may appear informing you about the use of a lower-powered adapter and slower charging speed.	Less than 60 W

Table 18. Power adapter requirements (continued)

Description	Value
Minimum power that is required from a power adapter to operate the computer and charge the battery. **NOTE:** A warning message appears informing you about the use of a lower-powered adapter and slower charging speed.	27 W
USB Power Delivery (PD) fast charging	Supported
ExpressCharge mode	Supported **NOTE:** Ensure that the computer with a 45 Wh battery is connected to a 65 W power adapter for this feature to be supported.

Battery

The following table lists the battery specifications of your Dell 15 D15261 .

Table 19. Battery specifications

Description	Option one	Option two
Battery type	3-cell, 41 Wh, Lithium Ion Polymer, ExpressCharge	4-cell, 54 Wh, Lithium Ion Polymer, ExpressCharge
Battery voltage	11.25 VDC	15.00 VDC
Battery weight (minimum)	0.19 kg (0.41 lb)	0.24 kg (0.55 lb)
Battery dimensions:		
Height	206.40 mm (8.12 in.)	271.90 mm (10.70 in.)
Width	82.00 mm (3.22 in.)	82.00 mm (3.22 in.)
Depth	5.75 mm (0.22 in.)	5.75 mm (0.22 in.)
Temperature range:		
Operating	When charging battery: • Initiating charging: 0°C to 45°C (32°F to 113°F) • Upper limit for charging (maximum): 50°C (122°F) When discharging battery: • Normal discharging: 0°C to 60°C (32°F to 140°F) • Over temperature protection (maximum): 70°C (158°F) The battery does not allow discharge past this temperature.	When charging battery: • Initiating charging: 0°C to 45°C (32°F to 113°F) • Upper limit for charging (maximum): 50°C (122°F) When discharging battery: • Normal discharging: 0°C to 60°C (32°F to 140°F) • Over temperature protection (maximum): 70°C (158°F) The battery does not allow discharge past this temperature.
Storage	-20°C to 65°C (-40°F to 149°F)	-20°C to 65°C (-40°F to 149°F)
Battery operating time	Varies depending on operating conditions and can significantly reduce under certain power-intensive conditions.	Varies depending on operating conditions and can significantly reduce under certain power-intensive conditions.

Table 19. Battery specifications (continued)

Description	Option one	Option two
Battery charging time (approximate)	Standard Charge/Predominately AC User Charge Method: • 0°C - 15°C maximum allowable charge time from 0% to 100% RSOC is 4 hours • 0°C - 15°C maximum allowable charge time from 0% to 100% RSOC is 4 hours ExpressCharge Method: • 0°C - 15°C maximum allowable charge time from 0% to 100% RSOC is 4 hours • 16°C - 45°C normal express charge • 46°C - 50°C maximum allowable charge time from 0% to 100% RSOC is 3 hours	Standard Charge/Predominately AC User Charge Method: • 0°C - 15°C maximum allowable charge time from 0% to 100% RSOC is 4 hours • 0°C - 15°C maximum allowable charge time from 0% to 100% RSOC is 4 hours ExpressCharge Method: • 0°C - 15°C maximum allowable charge time from 0% to 100% RSOC is 4 hours • 16°C - 45°C normal express charge • 46°C - 50°C maximum allowable charge time from 0% to 100% RSOC is 3 hours
Coin-cell battery	Not supported	Not supported

CAUTION: Operating and storage temperature ranges may differ among components, so operating or storing the device outside these ranges may impact the performance of specific components.

CAUTION: Dell Technologies recommends that you charge the battery regularly for optimal power consumption. If your battery charge is depleted, connect the power adapter, turn on your computer, and then restart your computer to reduce the power consumption.

NOTE: To help preserve battery health, the battery may enter Storage Mode after an extended period of inactivity (approximately three weeks or longer). If the charge level becomes critically low during storage, the battery may disable certain functions as a protective measure. Connect the AC adapter to power on the computer and recharge the battery. For more information about Storage Mode, see Battery Storage Mode at Dell Support Site.

Power requirements

NOTE: The information in this section is applicable to the European Union (EU) countries.



Figure 9. Pictogram for power charging requirements

The power that is delivered by the charger must be between a minimum of 60 Watts that is required by the radio equipment, and a maximum of 65 Watts in order to achieve the maximum charging speed.

This computer supports USB Power Delivery (PD) fast charging.

Display

The following table lists the display specifications of your Dell 15 D15261 .

Table 20. Display specifications

Description	Option one	Option two
Display type	15.3-inch Full High Definition Plus (FHD+)	15.3-inch Full High Definition Plus (FHD+)
Touch options	No	Yes
Display-panel technology	In-Plane Switching (IPS)	In-Plane Switching (IPS)
Display-panel dimensions (active area):		
Height	205.92 mm (8.11 in.)	205.92 mm (8.11 in.)
Width	329.47 mm (12.97 in.)	329.47 mm (12.97 in.)
Diagonal	388.53 mm (15.30 in.)	388.53 mm (15.30 in.)
Display-panel native resolution	1920 x 1200	1920 x 1200
Luminance (typical)	400 nits	400 nits
Megapixels	2.3	2.3
Color gamut	45% NTSC	45% NTSC
Pixels Per Inch (PPI)	148	148
Contrast ratio (minimum)	1200:1	1200:1
Response time (maximum)	25 milliseconds	25 milliseconds
Refresh rate	60 Hz	60 Hz
Horizontal view angle	+/- 89 degrees	+/- 89 degrees
Vertical view angle	+/- 89 degrees	+/- 89 degrees
Pixel pitch	0.1716 mm	0.1716 mm
Power consumption (maximum)	5.05 W	5.05 W
Anti-glare vs glossy finish	Anti-Glare	Anti-Glare

Fingerprint reader (optional)

The following table lists the specifications of the optional fingerprint-reader of your Dell 15 D15261 .

Table 21. Fingerprint reader specifications

Description	Values
Sensor technology	Capacitive
Sensor resolution	500 dpi

Table 21. Fingerprint reader specifications (continued)

Description	Values
Sensor pixel size	108 mm x 88 mm

Sensors

The following table lists the sensors of your Dell 15 D15261 .

Table 22. Sensors

Sensors support
Accelerometer for adaptive thermal
Hall sensor

External display support

The following table lists the external display support for your Dell 15 D15261 .

Table 23. External display support

Graphics card	Supported external displays with laptop display enabled	Supported external displays with laptop display disabled
Intel Graphics	4	3

Hardware security

The following table lists the hardware security of your Dell 15 D15261 .

Table 24. Hardware security

Hardware security
Wedge-shaped lock slot
Padlock ring
Chassis lock slot support
Chassis intrusion switch
Enter chain tamper alerts
SafeID including Trusted Platform Module (TPM) 2.0
Smart card keyboard (FIPS)
Microsoft 10 Device Guard and Credential Guard
Microsoft Windows BitLocker
Local hard drive data wipe through BIOS (Secure Delete)
Self-encrypting storage drives (Opal, FIPS)
Trusted Platform Module TPM 2.0
China TPM
Intel Secure Start
Intel Authenticate

Operating and storage environment

This table lists the operating and storage specifications of your Dell 15 D15261 .

Airborne contaminant level: G1 as defined by ISA-S71.04-1985

Table 25. Computer environment

Description	Operating	Storage
Temperature range	10°C to 35°C (50 °F to 95°F)	-40°C to 65°C (-40°F to 149°F)
Relative humidity (maximum)	20% to 80% (non-condensing)	5% to 95% (non-condensing)
Vibration (maximum)*	0.26 GRMS	1.37 GRMS
Shock (maximum)	40 G†	105 G†
Altitude range	-15.2 m to 3048 m (-49.87 ft to 10,000 ft)	-15.2 m to 10,668 m (-49.87 ft to 35,000 ft)
CAUTION: Operating and storage temperature ranges may differ among components, so operating or storing the device outside these ranges may impact the performance of specific components.		

* Measured using a random vibration spectrum that simulates the user environment.

† Measured using a 2 ms half-sine pulse.

Dell Optimizer

Dell Optimizer is an AI-based software application that allows you to customize your computer settings for power and battery, and more.

For Dell 15 D15261 with Dell Optimizer, you can:

- Extend the battery life of your computer with Intelligent Battery Extender and Dynamic Charge.
- Tune the performance, power consumption, cooling, and fan noise with selectable thermal modes.
- Access and secure your computer depending on your physical presence.
- Download and redeem the apps that are purchased with your computer.

For more information about configuring and using these features, search for *Dell Optimizer* at the Dell Support Site.

Dell support policy

For information about Dell support policy, search Dell Support Site.

4

Getting help and contacting Dell Technologies

Self-help resources

You can get information and help on Dell Technologies products and services using these self-help resources:

Table 26. Self-help resources

Self-help resources	Resource location
Information about Dell Technologies products and services	Dell Site
Contact Support	In Windows search, type `Contact Support`, and press Enter.
Online help for operating system	Windows Support Site
Access top solutions, diagnostics, drivers and downloads, and learn more about your computer through videos, manuals, and documents.	Your Dell Technologies computer is uniquely identified using a Service Tag or Express Service Code. To view relevant support resources for your Dell Technologies computer, enter the Service Tag or Express Service Code at Dell Support Site. For more information about how to find the Service Tag for your computer, see Instructions on how to find your Service Tag or Serial Number.
Dell Technologies knowledge base articles	1. Go to Dell Support Site. 2. On the menu bar at the top of the Support page, select **Support** > **Support Library**. 3. In the Search field on the Support Library page, type the keyword, topic, or model number, and then click or tap the search icon to view the related articles.

Contacting Dell Technologies

To contact Dell Technologies for sales, technical support, or customer service issues, see Contact Support at Dell Support Site.

NOTE: Availability of the services may vary depending on the country or region, and product.

NOTE: If you do not have an active Internet connection, you can find contact information about your purchase invoice, packing slip, bill, or Dell Technologies product catalog.

5

Getting help and contacting Dell

Self-help resources

You can get information and help on Dell products and services using these self-help resources:

Table 27. Self-help resources

Self-help resources	Resource location
Information about Dell products and services	Dell Site
Contact Support	In Windows search, type `Contact Support`, and press Enter.
Online help for operating system	Windows Support Site Linux Support Site
Access top solutions, diagnostics, drivers and downloads, and learn more about your computer through videos, manuals, and documents.	Your Dell computer is uniquely identified using a Service Tag or Express Service Code. To view relevant support resources for your Dell computer, enter the Service Tag or Express Service Code at Dell Support Site. For more information about how to find the Service Tag for your computer, see Locate the Service Tag on your computer.
Dell knowledge base articles	1. Go to Dell Support Site. 2. On the menu bar at the top of the Support page, select **Support** > **Support Library**. 3. In the Search field on the Support Library page, type the keyword, topic, or model number, and then click or tap the search icon to view the related articles.

Contacting Dell

To contact Dell for sales, technical support, or customer service issues, see Contact Support at Dell Support Site.

NOTE: Availability of the services may vary depending on the country or region, and product.

NOTE: If you do not have an active Internet connection, you can find contact information in your purchase invoice, packing slip, bill, or Dell product catalog.

6

Revision history

Tracks all updates that are made to the document. It typically includes the date of change, version number, and a brief description of the modification. This log helps maintain transparency, accountability, and a clear timeline of progress.

Table 28. Revision history

Revision	Date	Description
A00	August 2026	Original publish date.