



## Miniature circuit breaker (MCB), 3 A, 3p+N, characteristic: K

**Part no.** FAZ-K3/3N  
**Catalog No.** 279007  
**Alternate Catalog No.** FAZ-K3/3N  
**EL-Nummer (Norway)** 1605973

Similar to illustration

## Delivery program

|                                                 |          |    |                                                                |
|-------------------------------------------------|----------|----|----------------------------------------------------------------|
| Basic function                                  |          |    | Miniature circuit-breakers                                     |
| Number of poles                                 |          |    | 3 pole+N                                                       |
| Tripping characteristic                         |          |    | K                                                              |
| Application                                     |          |    | Switchgear for industrial and advanced commercial applications |
| Rated current                                   | $I_n$    | A  | 3                                                              |
| Rated switching capacity acc. to IEC/EN 60947-2 | $I_{cu}$ | kA | 10                                                             |
| Product range                                   |          |    | FAZ                                                            |

## Technical data

### Electrical

|                                                 |            |         |                       |
|-------------------------------------------------|------------|---------|-----------------------|
| Standards                                       |            |         | EN 45545-2; IEC 61373 |
| Rated operational voltage                       | $U_e$      | V       |                       |
|                                                 | $U_e$      | V AC    | 240/415               |
|                                                 |            | V DC    | 60 (per pole)         |
| Rated switching capacity acc. to IEC/EN 60947-2 | $I_{cu}$   | kA      | 10                    |
| Operational switching capacity                  |            | kA      | 7.5                   |
| Characteristic                                  |            |         | B, C, D, K, S, Z      |
| Max. back-up fuse                               |            | A gL/gG | 125                   |
| Selectivity Class                               |            |         | 3                     |
| lifespan                                        |            |         |                       |
| Lifespan                                        | Operations |         | > 10000               |
| Direction of incoming supply                    |            |         | as required           |

### Mechanical

|                              |  |                 |                                         |
|------------------------------|--|-----------------|-----------------------------------------|
| Standard front dimension     |  | mm              | 45                                      |
| Enclosure height             |  | mm              | 80                                      |
| Mounting width per pole      |  | mm              | 17.5                                    |
| Mounting                     |  |                 | IEC/EN 60715 top-hat rail               |
| Degree of Protection         |  |                 | IP20, IP40 (when fitted)                |
| Terminals top and bottom     |  |                 | Twin-purpose terminals                  |
| Terminal protection          |  |                 | Finger and back-of-hand proof to BGV A2 |
| Terminal capacities          |  | mm <sup>2</sup> |                                         |
|                              |  | mm <sup>2</sup> | 1 x 25                                  |
|                              |  | mm <sup>2</sup> | 2 x 10                                  |
| Thickness of busbar material |  | mm              | 0.8 ... 2                               |
| Mounting position            |  |                 | As required                             |

## Design verification as per IEC/EN 61439

|                                                          |           |   |     |
|----------------------------------------------------------|-----------|---|-----|
| Technical data for design verification                   |           |   |     |
| Rated operational current for specified heat dissipation | $I_n$     | A | 3   |
| Heat dissipation per pole, current-dependent             | $P_{vid}$ | W | 0   |
| Equipment heat dissipation, current-dependent            | $P_{vid}$ | W | 4.2 |
| Static heat dissipation, non-current-dependent           | $P_{vs}$  | W | 0   |

|                                    |                   |    |                                                                             |
|------------------------------------|-------------------|----|-----------------------------------------------------------------------------|
| Heat dissipation capacity          | P <sub>diss</sub> | W  | 0                                                                           |
| Operating ambient temperature min. |                   | °C | -40                                                                         |
| Operating ambient temperature max. |                   | °C | 75                                                                          |
|                                    |                   |    | linear, per +1 °C, results in a 0.5% reduction of current carrying capacity |


## Technical data ETIM 7.0

Circuit breakers and fuses (EG000020) / Miniature circuit breaker (MCB) (EC000042)


Electric engineering, automation, process control engineering / Electrical installation, device / Miniature circuit breaker system (MCB) / Miniature circuit breaker (MCB)  
(ecI@ss10.0.1-27-14-19-01 [AAB905014])


|                                                                            |  |                 |          |
|----------------------------------------------------------------------------|--|-----------------|----------|
| Release characteristic                                                     |  |                 | K        |
| Number of poles (total)                                                    |  |                 | 4        |
| Number of protected poles                                                  |  |                 | 3        |
| Rated current                                                              |  | A               | 3        |
| Rated voltage                                                              |  | V               | 400      |
| Rated insulation voltage U <sub>i</sub>                                    |  | V               | 440      |
| Rated impulse withstand voltage U <sub>imp</sub>                           |  | kV              | 4        |
| Rated short-circuit breaking capacity I <sub>cn</sub> EN 60898 at 230 V    |  | kA              | 0        |
| Rated short-circuit breaking capacity I <sub>cn</sub> EN 60898 at 400 V    |  | kA              | 0        |
| Rated short-circuit breaking capacity I <sub>cu</sub> IEC 60947-2 at 230 V |  | kA              | 10       |
| Rated short-circuit breaking capacity I <sub>cu</sub> IEC 60947-2 at 400 V |  | kA              | 10       |
| Voltage type                                                               |  |                 | AC       |
| Frequency                                                                  |  | Hz              | 50 - 60  |
| Current limiting class                                                     |  |                 | 3        |
| Suitable for flush-mounted installation                                    |  |                 | No       |
| Concurrently switching N-neutral                                           |  |                 | Yes      |
| Over voltage category                                                      |  |                 | 3        |
| Pollution degree                                                           |  |                 | 2        |
| Additional equipment possible                                              |  |                 | Yes      |
| Width in number of modular spacings                                        |  |                 | 4        |
| Built-in depth                                                             |  | mm              | 70.5     |
| Degree of protection (IP)                                                  |  |                 | IP20     |
| Ambient temperature during operating                                       |  | °C              | -25 - 75 |
| Connectable conductor cross section multi-wired                            |  | mm <sup>2</sup> | 1 - 25   |
| Connectable conductor cross section solid-core                             |  | mm <sup>2</sup> | 1 - 25   |


Characteristics

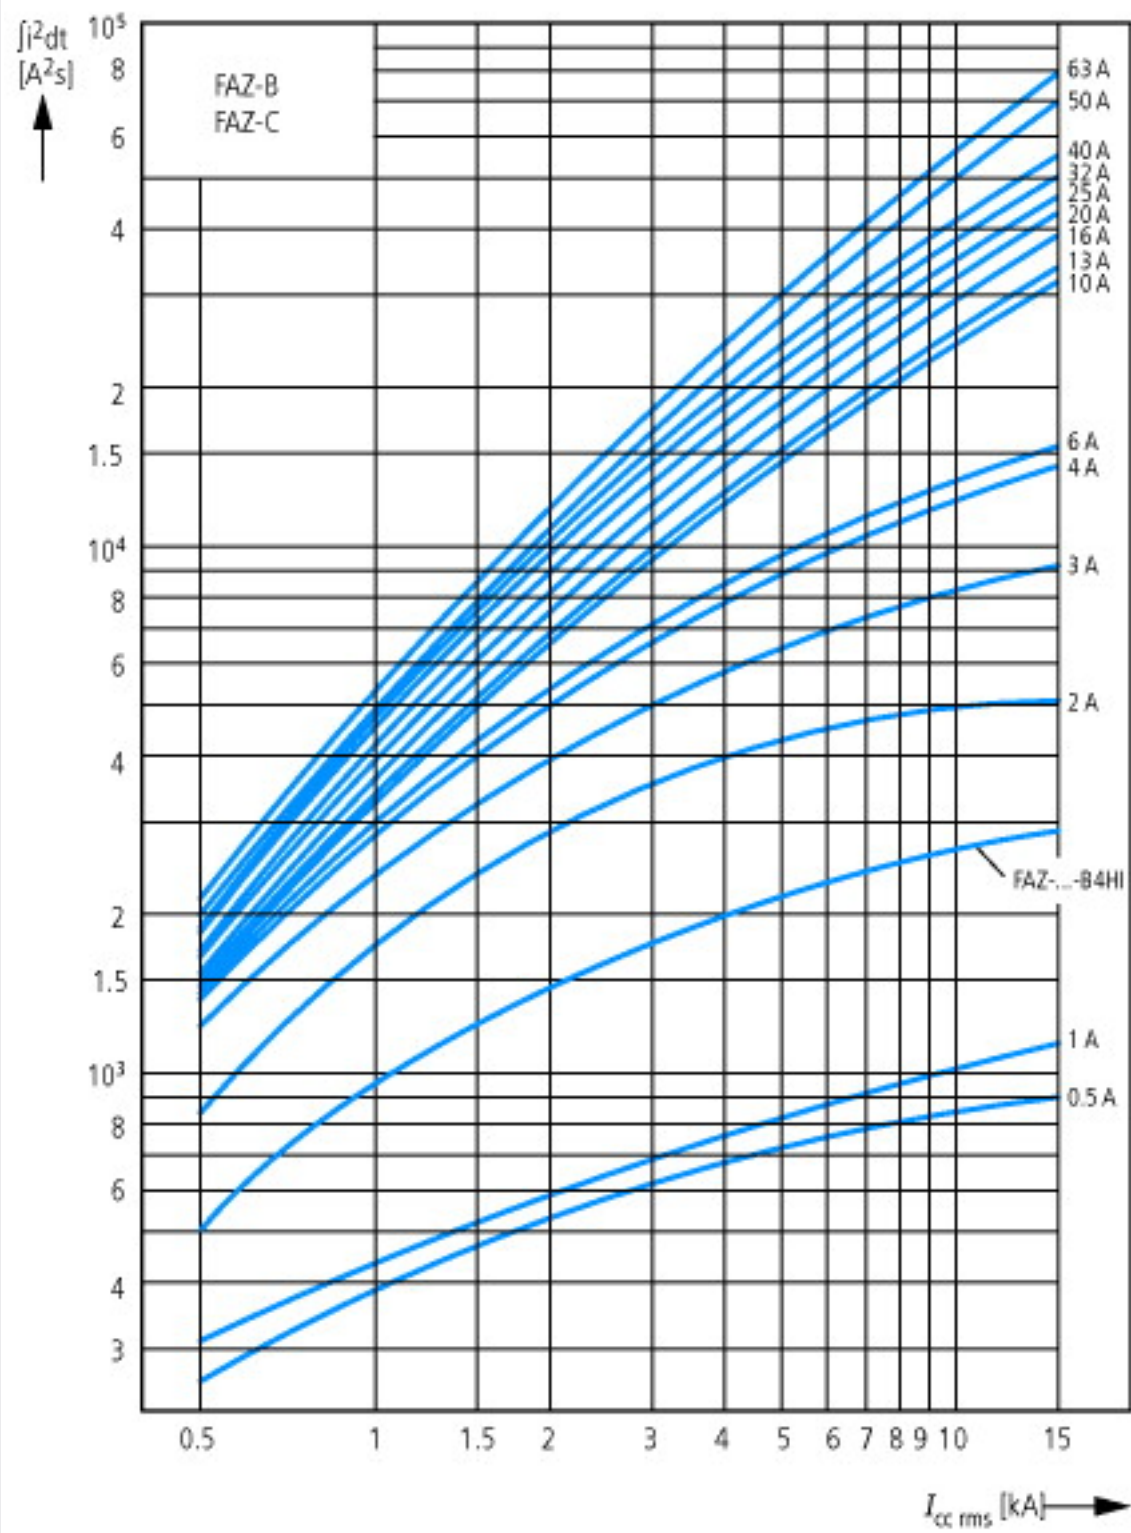


Let-through energy  $i^2t$   
According to IEC/EN 60898

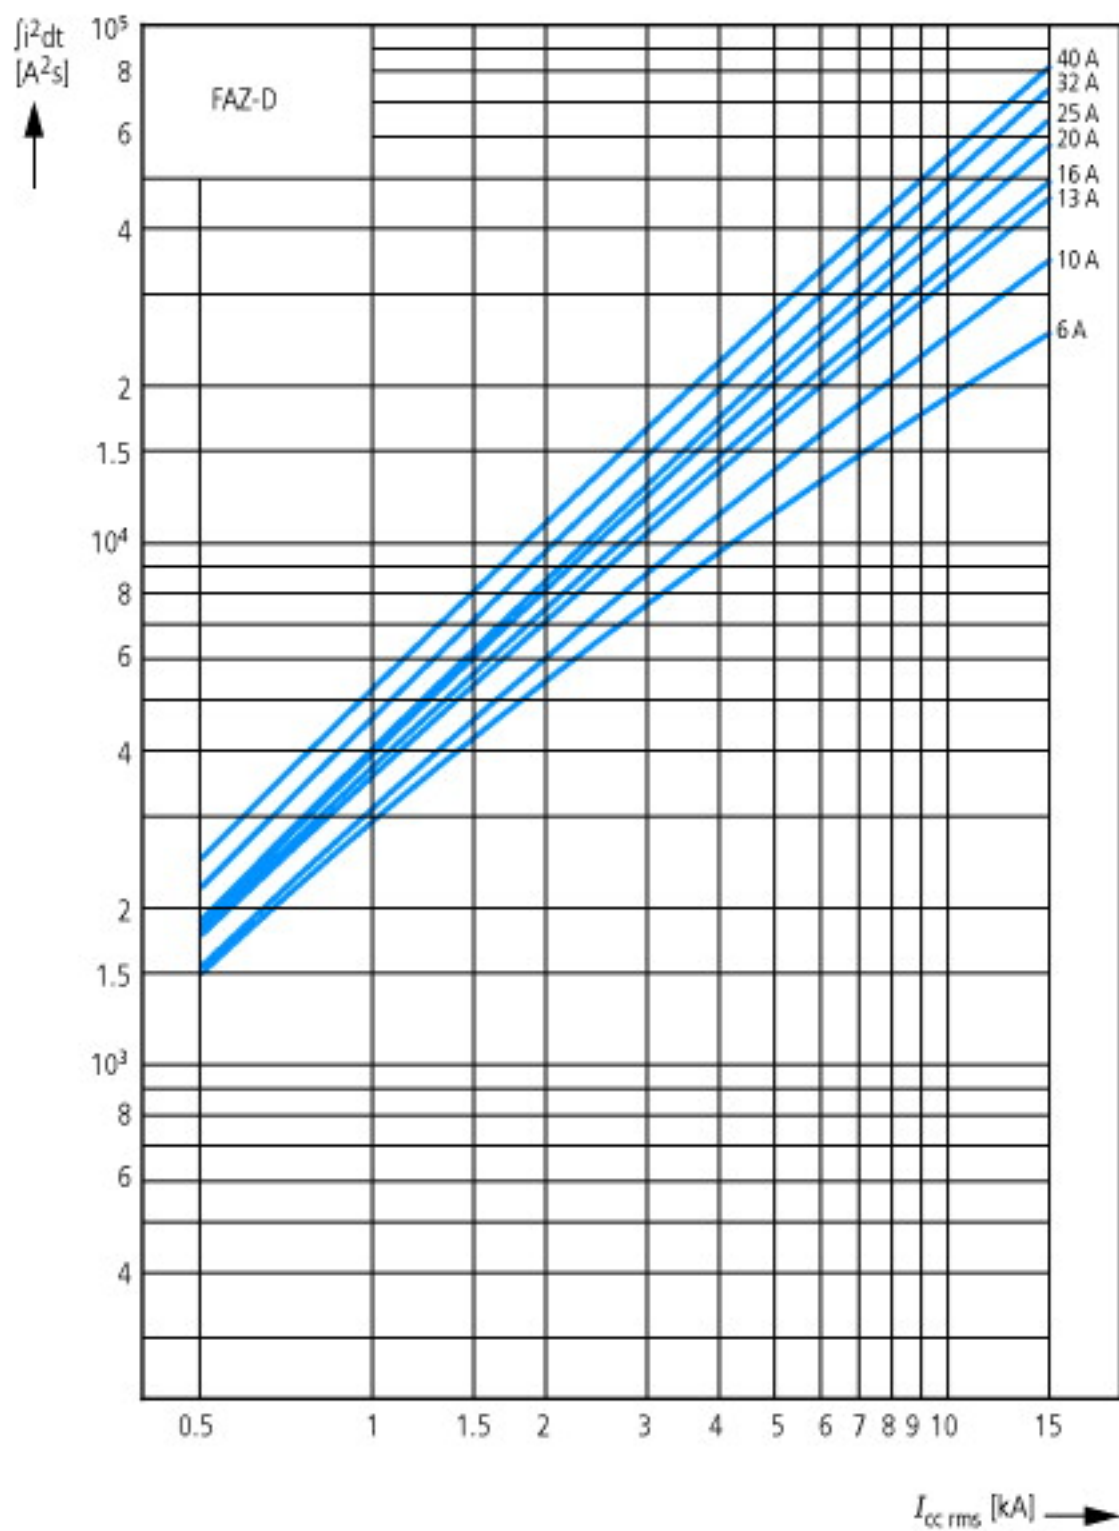

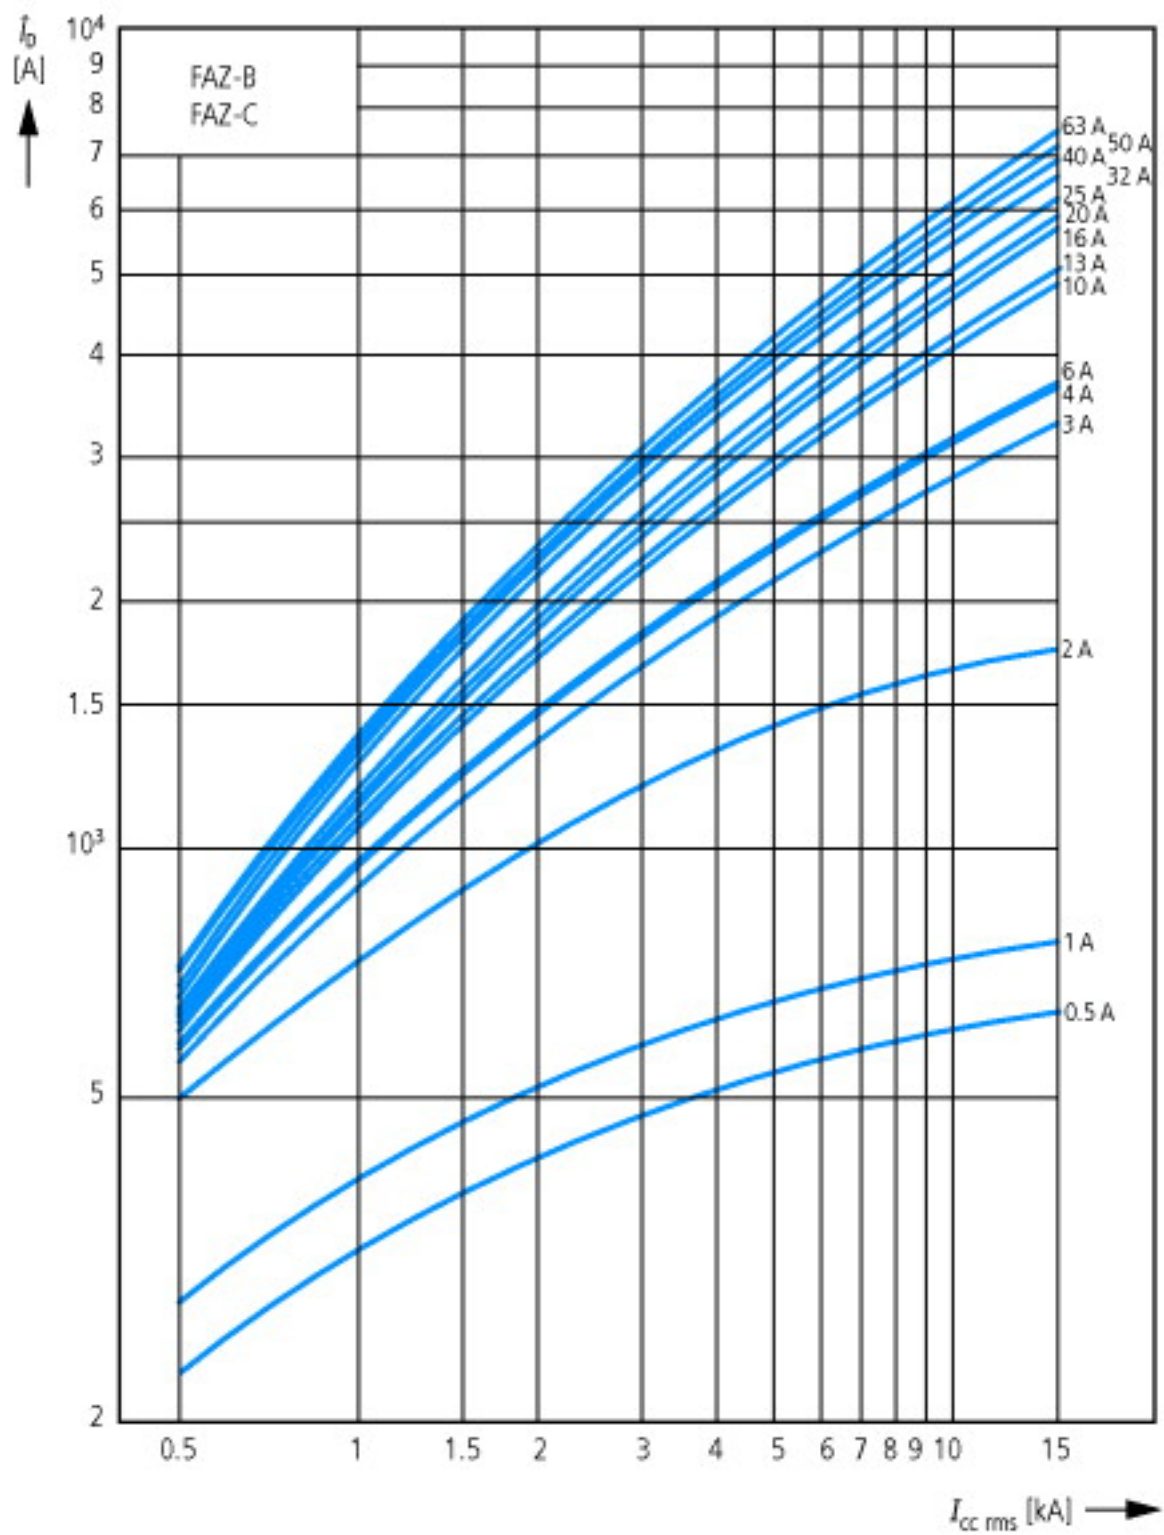


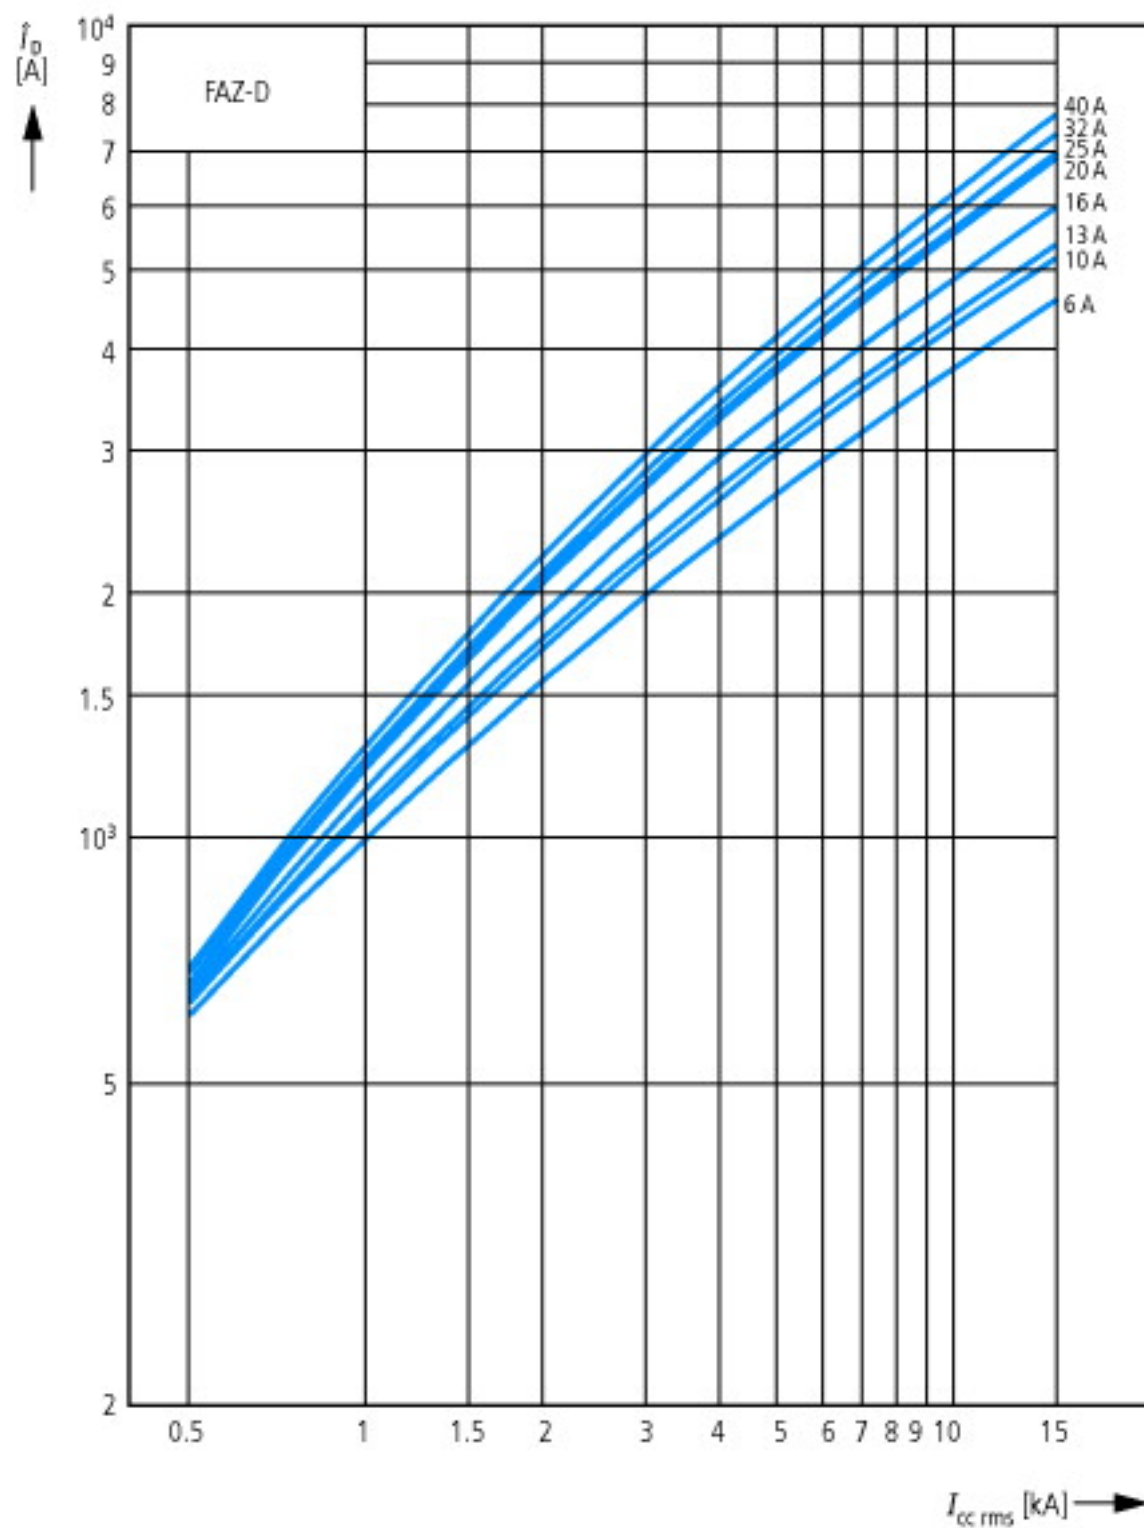

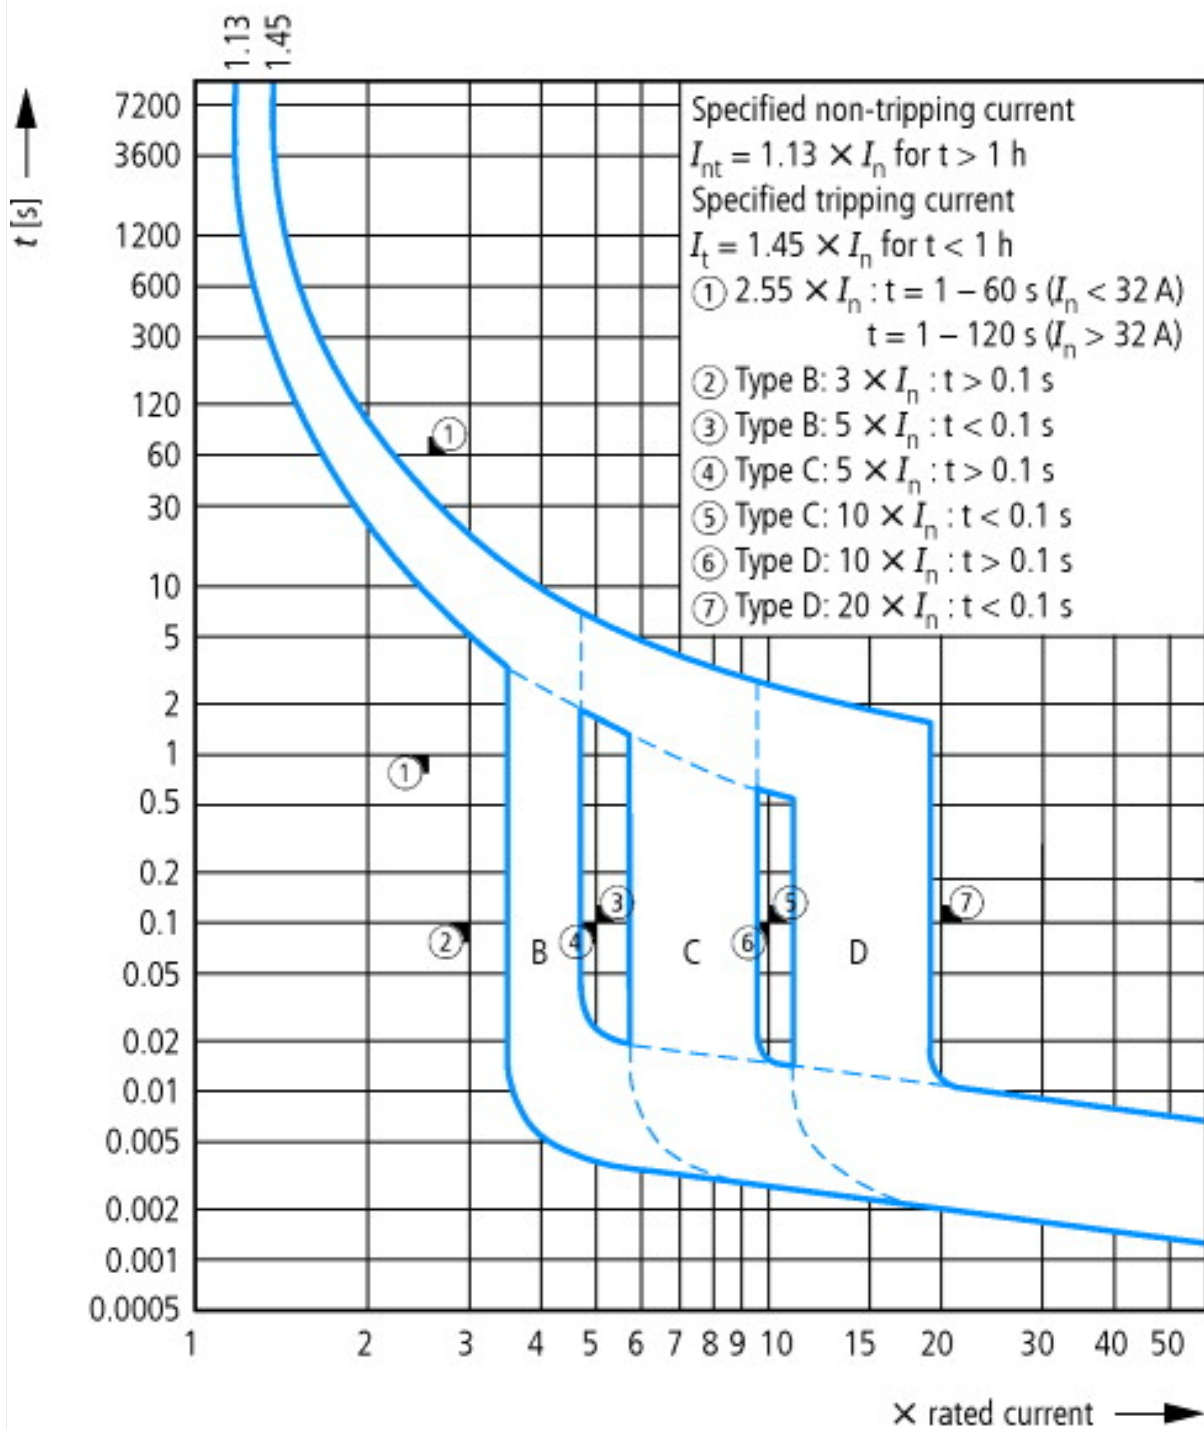

Tripping characteristic at 30 °C:  
 K according to IEC/EN 60947

Dimensions

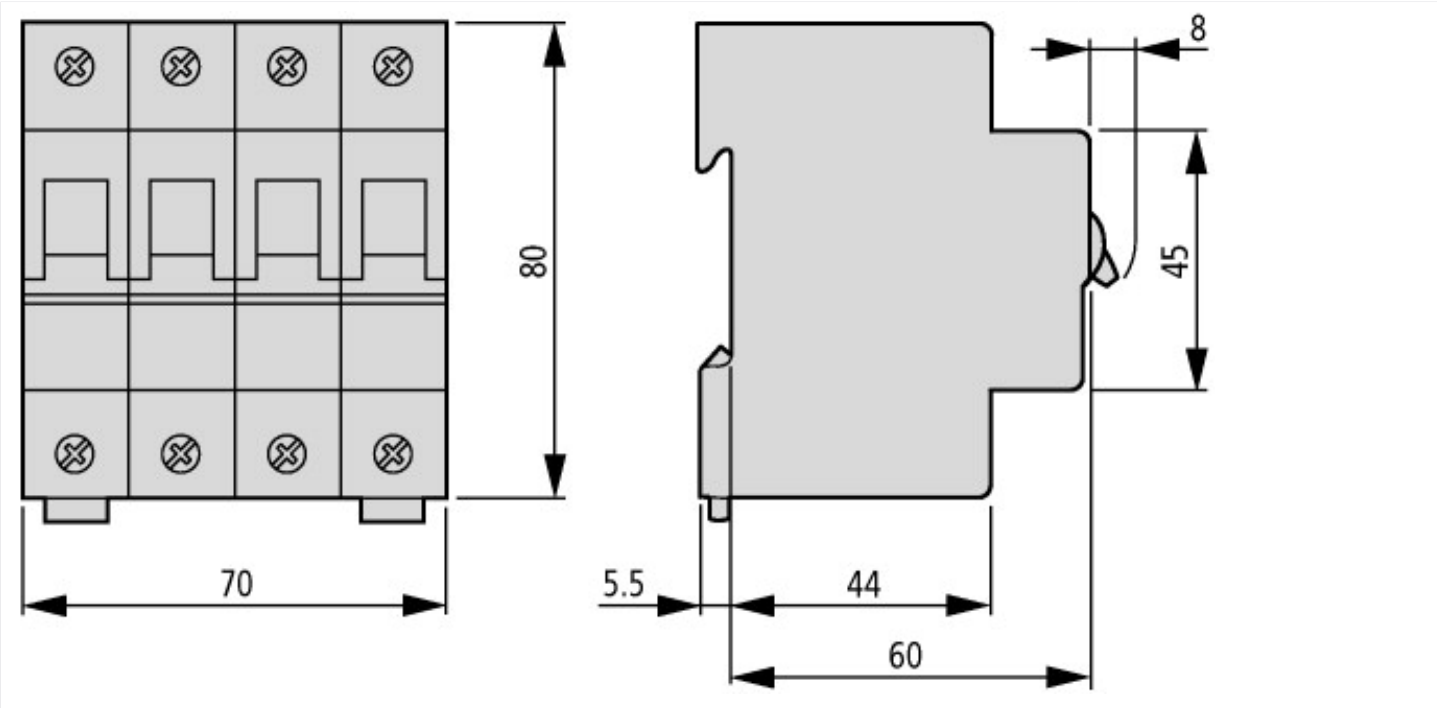

Additional product information (links)

|                                  |                                                                                                                                                                                                                                       |
|----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Temperature dependency, derating | <a href="https://www.eaton.com/content/dam/eaton/technicaldocumentation/technical-data-tables/Derating table FAZ.pdf">https://www.eaton.com/content/dam/eaton/technicaldocumentation/technical-data-tables/Derating table FAZ.pdf</a> |
|----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|