


Delock PCI Express Card > 4 x 1 Gigabit LAN PoE+ RJ45

Opis

This PCI Express card by IOI offers four network ports with a data transfer rate up to 1 Gbps. The RJ45 ports support Power over Ethernet according to IEEE 802.3af / 802.3at, so you can supply power to PoE-enabled devices, such as an IP camera or a PoE splitter via the network cable.

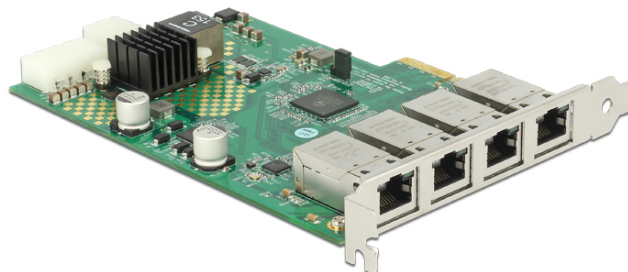

Specyfikacja

- IOI item number: GEPX4-PCIE4XE301
- Connector:
 - external: 4 x Gigabit LAN RJ45 jack
 - internal: 1 x SATA 15 pin power connector
 - 1 x 6 pin power connector
 - 1 x 4 pin power connector
 - 1 x PCI Express x4, V2.1
- Chipset: Realtek
- Data transfer rate:
 - Ethernet up to 10 Mb/s
 - Fast Ethernet up to 100 Mb/s
 - Gigabit Ethernet up to 1 Gbps
 - PCI Express x1 up to 5 Gbps per lane
- Supports Full Duplex flow control (IEEE 802.3x)
- Supports IEEE 802.3 10Base-T and 802.3u 100Base-TX
- Supports IEEE 802.1P Layer 2 Priority Encoding
- Supports IEEE 802.1Q VLAN tagging
- Supports IEEE 802.3az-2010 (EEE)
- Supports 9k Jumbo frames
- Supports IEEE 802.3af & IEEE 802.3at Power Sourcing Equipment (PSE)
- Power delivery: max. 65 W total
- PoE power input from PCIe, SATA 15 pin, 4 or 6 pin power connector

Wymagania systemowe

- Windows 7/7-64/8.1/8.1-64/10/10-64, Linux Kernel 2.6.31
- PC with one free PCI Express x4 / x8 / x16 / x32 slot

Zawartość opakowania

- PCI Express card
- Driver CD
- User manual

Numer artykułu 89559

EAN: 4043619895595

Kraj pochodzenia: Taiwan, Republic of China

Opakowanie: White Box



Zdjęcia





General	
Supported operating system:	Linux Kernel 2.6.31 Windows 7 32-bit Windows 7 64-bit Windows 8.1 32-bit Windows 8.1 64-bit Windows 10 32-bit Windows 10 64-bit
Interface	
Zewnętrzne:	2 x RJ45 Jack
Wewnętrzne:	1 x 15-pinowe męski złącze SATA 1 x 6 pin power connector 1 x PCI Express x1, V2.1 1 x 4-pinowe złącze zasilania
Technical characteristics	
Szybkość transmisji danych:	Ethernet up to 10 Mbps Fast Ethernet up to 100 Mbps Gigabit Ethernet up to 1 Gbps PCI Express do 5 Gb/s
Physical characteristics	
Slot bracket:	standard