



DONN15G 12-in-1 MST Docking Station USB 3.2 Gen 1, HDMI x 2, VGA, USB-C, USB- A, SD, TF/MicroSD, Audio, GbE, USB PD

Product Images

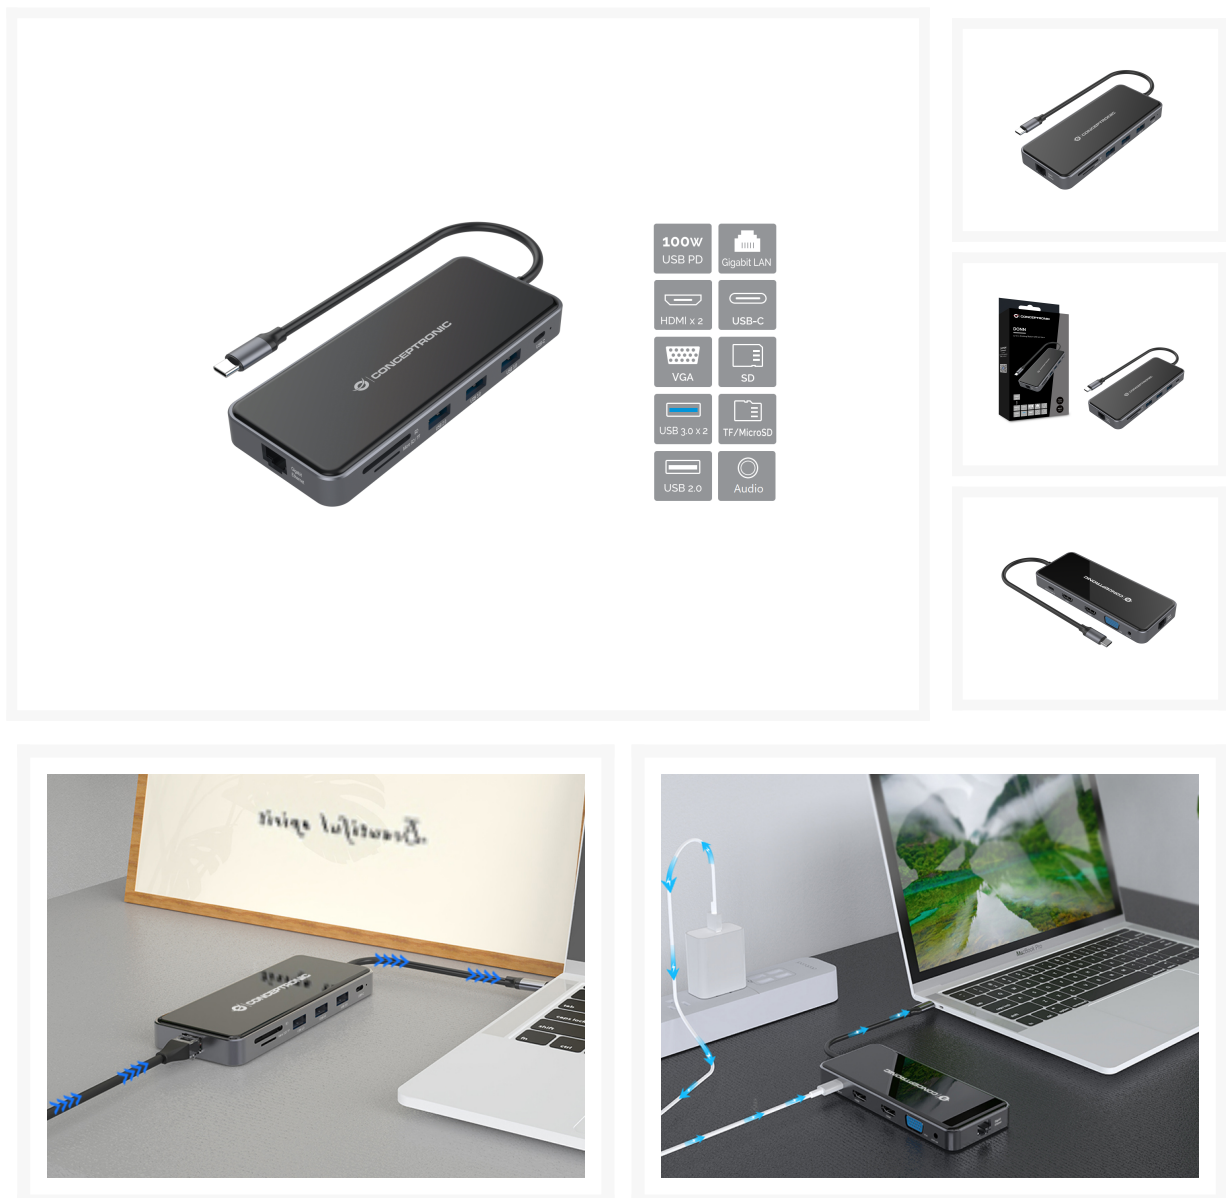

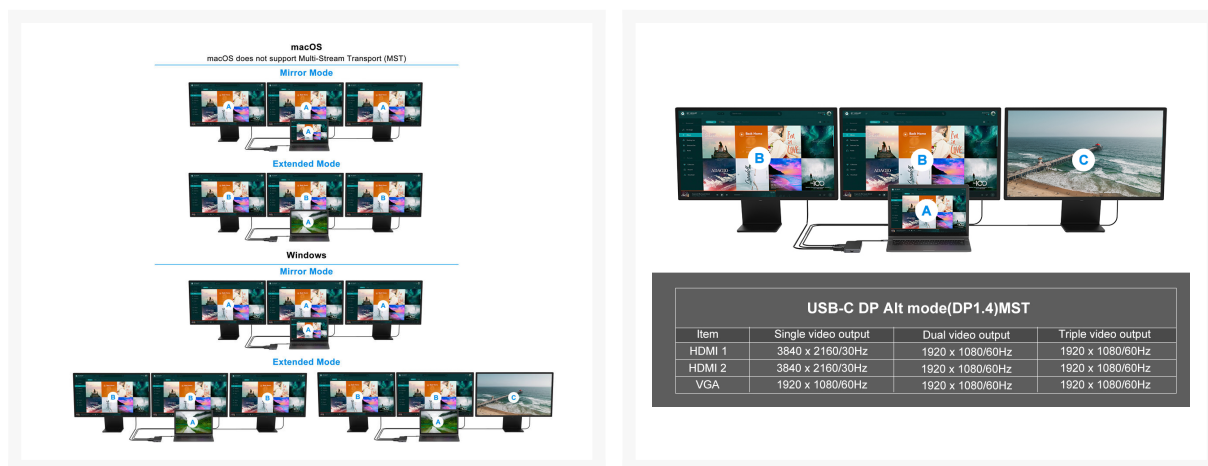

Short Description

- 12-in-1 USB-C to HDMI/VGA/USB-C PD/USB-C data/USB 3.0/USB 2.0/SD/TF/GbE/AUX multiport adapter
- Supports dual extended-mode displays (MST) on Windows
- Supports HDMI resolution up to 4K 30Hz
- Supports VGA resolution up to 1080P 60Hz
- Supports VGA & HDMI simultaneously
- Supports USB Power Delivery (PD) up to 100W
- Provides a Gigabit Ethernet port with speeds up to 1000Mbps
- Supports Wake-on-LAN feature to startup computers remotely
- USB 3.2 Gen 1 SuperSpeed (5Gb/s)
- 3.5mm audio combo jack
- Multi-platform support: Windows, macOS, ChromeOS
- Simple Plug and Play installation
- Cable length: 25cm

Description

This 12-in-1 docking station makes it possible to expand your device's USB Type-C capacity with HDMI/VGA/USB-C PD/USB-C data/USB 3.0/USB 2.0/SD/TF/GbE/AUX ports. The adapter provides an easy way to add HDTV, or equipment such as a monitor or projector to any USB-C device such as a smartphone, portable gaming console, MacBook, Chromebook Pixel or any similar late-model laptop with USB-C ports. The multiport video adapter lets you mirror or extend content on three additional monitors simultaneously (2 x HDMI, 1 x VGA), creating a triple-screen workstation.

Multi Stream Transport, or MST, is a means of connecting one or more monitors together via a single display port. This technology makes it possible to connect say, three monitors to a laptop, using a docking station. This works by combining multiple video signals into one single stream and then "unpacking"; them again on the display side. MST works on any Windows® device that supports DP Alt Mode (DisplayPort Alternate Mode), using USB-C.

Perfect for home entertainment, office presentations and classroom teaching.

Additional Information

Harmonized System (HS) code	847180
Customs product code (TARIC)	8471800000
Approval and Compliance	CE, RoHS
Compatible operating systems	Windows XP/Vista/7/8/10 MacOS 10.5 or above Android 5.0 or above Linux
Package Contents	DONN15G Multilingual quick installation guide
Cable Length	0.25m
Dimensions (W x D x H)	141 x 58.3 x 16 mm
Product weight (kg)	0.115
Color	Grey
EAN	4015867229132
Model Number	DONN15G
USB Power Delivery (PD)	100W
Connector	USB-C male
Pass-through Charging	82W
Port Configuration	HDMI x 2, VGA x 1, USB PD x 1, USB-C 3.0 x 1, USB 3.0 x 2, USB 2.0 x 1, SD x 1, MicroSD/TF x 1, GbE x 1, Audio x 1
Power supply included	No
Resolutions	4K 30Hz Single display, 1080P 60Hz Dual display, 1080P 60Hz Triple display
Standards	HDMI 1.4, USB PD 3.0, USB 3.2 Gen 1, SD 2.0, MicroSD/TF 2.0

