



RASETSU

CPU Cooler


Slip Stream120
PWM Adjustable

Trident Multi Layer
Fin Structure

Unparallel Six Heatpipe
Construction

Improved Version
Of VTMS

Wide Range
Cooling Purposes

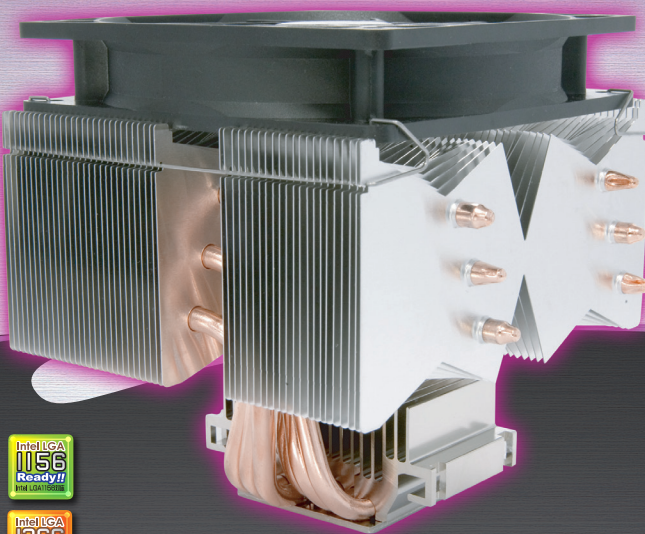

Technical Data

Weight	730 g / 25.75 oz. (Including Fan)
Dimensions (WxDxH)	130 x 141 x 130 mm 5.212 x 5.55 x 5.12 in
Fan Dimensions (WxDxH)	120 x 120 x 25 mm 4.72 x 4.72 x 0.98 in
Fan Speed	
Max. Band	740 (±25%) ~ 1,900 rpm (±10%)
Min. Band	470 (±30%) ~ 1,340 rpm (±10%)
Noise Level	
Max. Band	9.8 ~ 37.0 dBA
Min. Band	7.05 ~ 27.3 dBA
Air Flow	
Max. Band	37.15 ~ 110.31 CFM = 63 ~ 187 m³/h
Min. Band	23.0 ~ 76.53 CFM = 39 ~ 130 m³/h
Compatibility	Intel Socket LGA 775/1156/1366 AMD Socket 754/939/AM2(+)/AM3

Accessory

Mounting Clips for AMD & Intel, Thermal Grease, Installation Guide

VTMS Clips

Versatile Tool-Free Multiplatform System


Intel LGA775/1156/1366



Rasetsu Product Specifications

Twist Intersected Pipe Structure

Twisted interdetected six heatpipes achieved high heat transfer structure concentrated onto topflow heatsink layout.



Trident Multi Layer Fin Structure

By placing the number of triangle shaped main & supplemental heatsink fins to maximize the air intake volume, heat absorb rate from the build-in heatpipes is ideal for extreme over-clocking purposes as well as to cool the high-end multicore CPU!



Slip Stream 120 PWM Adjustable

Equipped with Scythe original Slip Stream PWM 120mm PWM Adjustable fan, it allows a user to choose the fully automatic PWM feature fan speed control or alternatively adjust the PWM band range to fulfill demands from silent to high performance users!



Package Weight	Net: 812 g / 28.64 oz. Gross: 1,010 g / 35.63 oz.
Package Size	155 x 140 x 170 mm 6.1 x 5.51 x 6.69 in
Carton Info	10 pcs. / 13 kg (28.66 lb) 835 x 410 x 215 mm 32.87 x 16.14 x 8.46 in

Item Number	SCRT-1000
EAN	4571225046938
UPC	894092003601



Scythe EU GmbH

Willinghusener Weg 5c
22113 Oststeinbek / Germany

Service/Support

Tel: +49 (0) 40 822 459 88 - 0
Fax: +49 (0) 40 822 459 88 - 9
E-Mail: sales@scythe.com

www.scythe.com

