


CSM-H87M-G43 (MS-7823v1.2) m-ATX Motherboard

Support Intel® Haswell processors for LGA 1150 socket

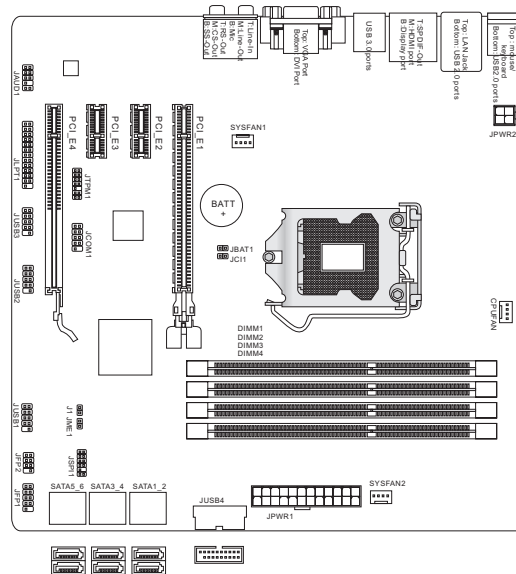

Motherboard Specification

Processor Support Support Intel® Haswell processors for LGA 1150 socket	Connectors - Back panel 1 PS/2 mouse/ keyboard combo port 4 USB 2.0 ports 2 USB 3.0 ports 1 VGA port 1 DVI port 1 SPDIF-Out 1 HDMI port 1 Display port 1 LAN port 6 flexible audio ports - On-Board 3 USB 2.0 connectors 1 USB 3.0 connector 1 Chassis Intrusion connector 1 Serial port connector 1 Front Panel Audio connector 1 TPM Module connector 1 Parallel port connector
Base Clock 100 MHz/125 MHz/167 MHz	Slots 2 PCIE x16 slots 2 PCIE x1 slots
Chipset Intel® H87 chipset	Form Factor m-ATX (243.84 x 243.84 mm)
Memory Support - Support 4 DDR3 DIMMs 1066/ 1333/ 1600 with 22nm Haswell processors up to 32GB max - Supports Dual-Channel mode	Feature on Focus - Click BIOS II - M-Flash - OC Genie 4 - PCIE 3.0 - SATA 6Gb/s - Super Charger - USB 3.0 - USB Safeguard 2 Way Cross Fire
LAN Supports LAN 10/100/1000 Fast Ethernet by Realtek® RTL8111G	Mounting 8 mounting holes
Audio - Chip integrated by Realtek® ALC892 - Flexible 8-channel audio with jack sensing - Compliant with Azalia 1.0 Spec	
SATA 6 SATA 6Gb/s (SATA1~SATA6) ports by Intel® H87	
USB 3.0 4 USB 3.0 ports by Intel® H87 (rear x 2, front x 2)	

These specification is subject to change without prior notice.