

Yuasa Technisches Datenblatt

YBX9020 - YBX 9000 AGM Start Stop Plus Batteries

Leistung

Nennspannung	12 V
Kapazität (20 Stunden)	105 Ah
Bewertet mit CCA	950 A

Maße (±2 mm)

Länge	394 mm
Breite	175 mm
Höhe	190 mm

Maße und Gewichte

Gewicht	29.6 kg
---------	---------



Gehäuseeigenschaften

Art des Gehäuses	L6 DIN AGM
Terminal-Typ	T1
Bodenleiste	B13
Griffe	Ja
Pol-Entlüftung	Ja
Deckel-Typ	VRLA


Technologie

Flammensperre	Ja
Technologie	Ca/Ca VRLA
Typ des Separators	AGMSORTIMENT
VDA-Rollover-Test	Ja
Empfohlener Laderate (A)	7.35 A
Leistungskennzeichnung	W5-C2-V3-M3


Gehäuseeigenschaften

T1


Standard DIN Post

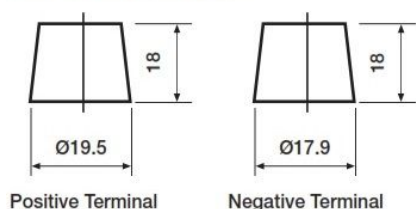

Zellenanordnung

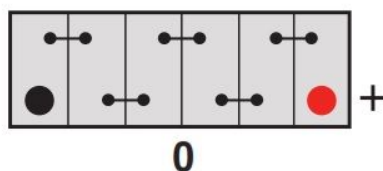

Batteriehalter



by **GS YUASA**

www.yuasa.com

Yuasa Technical Data Sheet

YBX9020 - YBX 9000 AGM Start Stop Plus Batteries

Performance

Nominal Voltage	12 V
Capacity (20hr)	105 Ah
Rated CCA	950 A

Dimensions (±2mm)

Length	394 mm
Width	175 mm
Height	190 mm



Weights & Measures

Weight	29.6 kg
--------	---------

Container Features

Case Type	L6 DIN AGM
Terminal Type	T1
Hold-down	B13
Handles	✓
End Venting	✓
Lid Type	VRLA


Technology

Flame Arrestor	✓
Technology	Ca/Ca VRLA
Separator Type	AGM
VDA Roll Over Test	✓
Recommended Charge Rate (A)	7.35 A
Performance Marking	W5-C2-V3-M3

Terminal Type

T1


Standard DIN Post

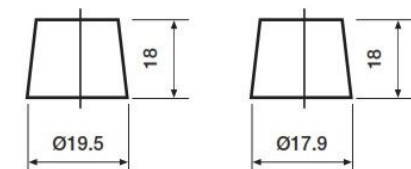


Positive Terminal

Negative Terminal

Cell Assembly Layout

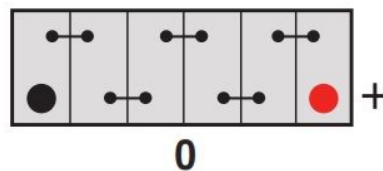

Battery Hold-down



by GSYUASA

www.yuasa.com